


~~127~~
~~5~~


9194
3

C

W. W. ELLIS

360

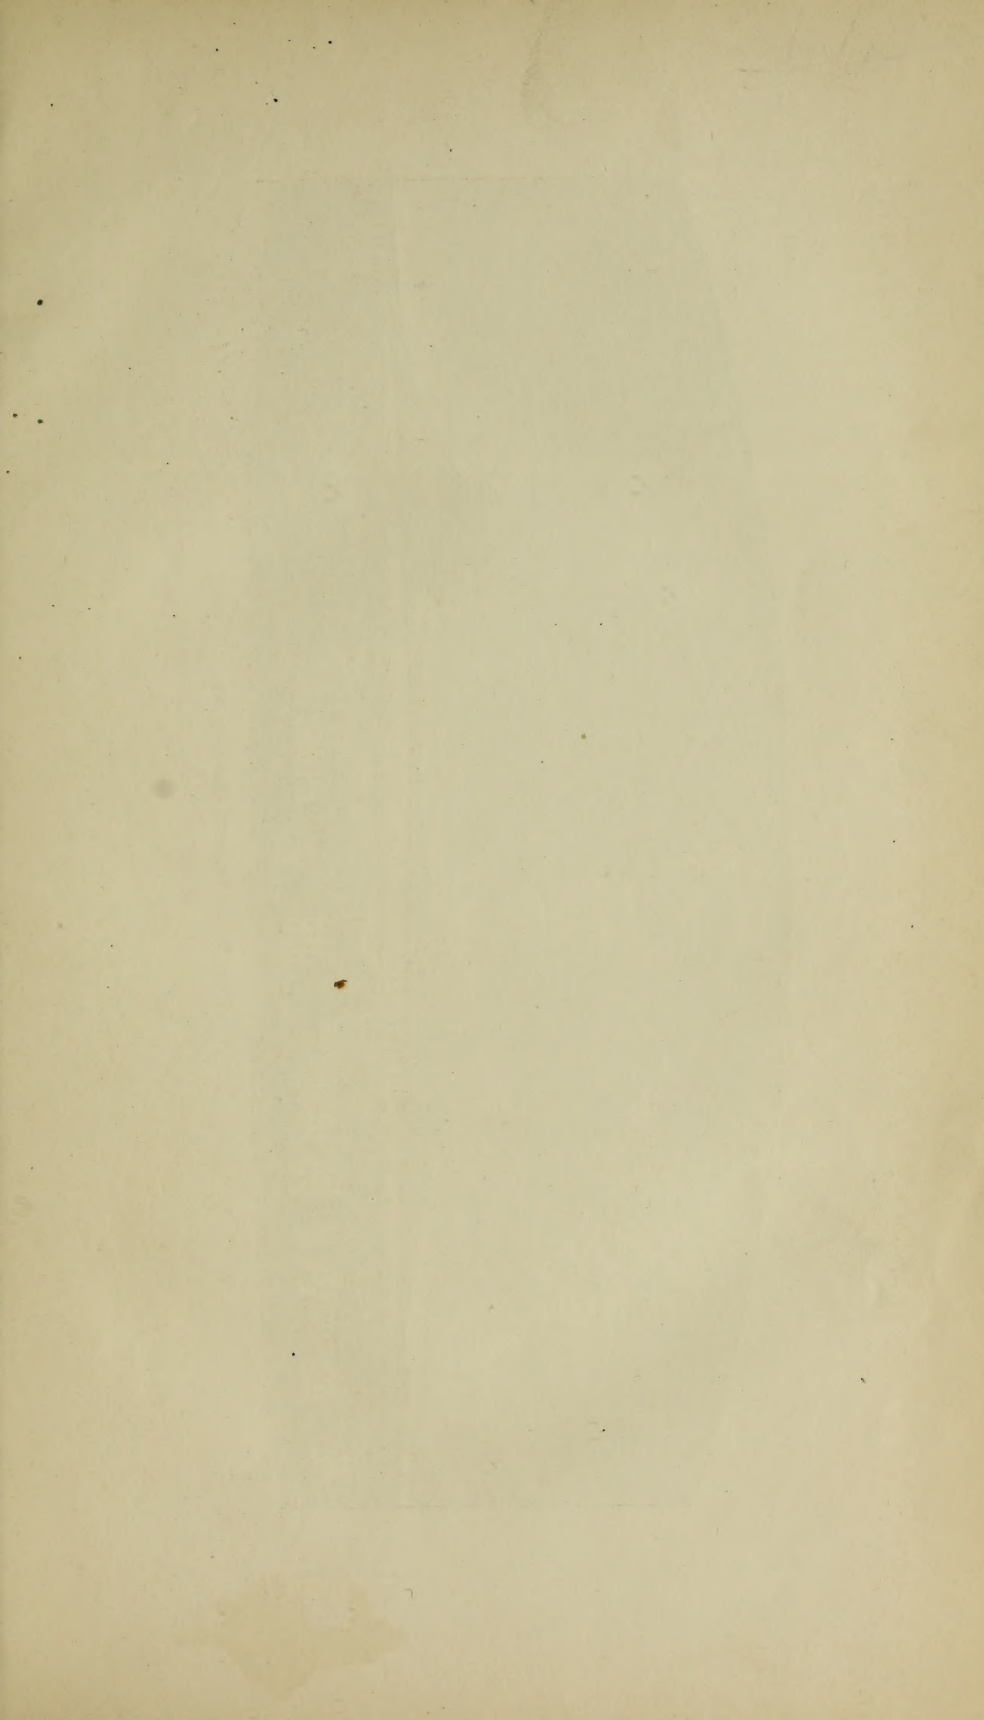

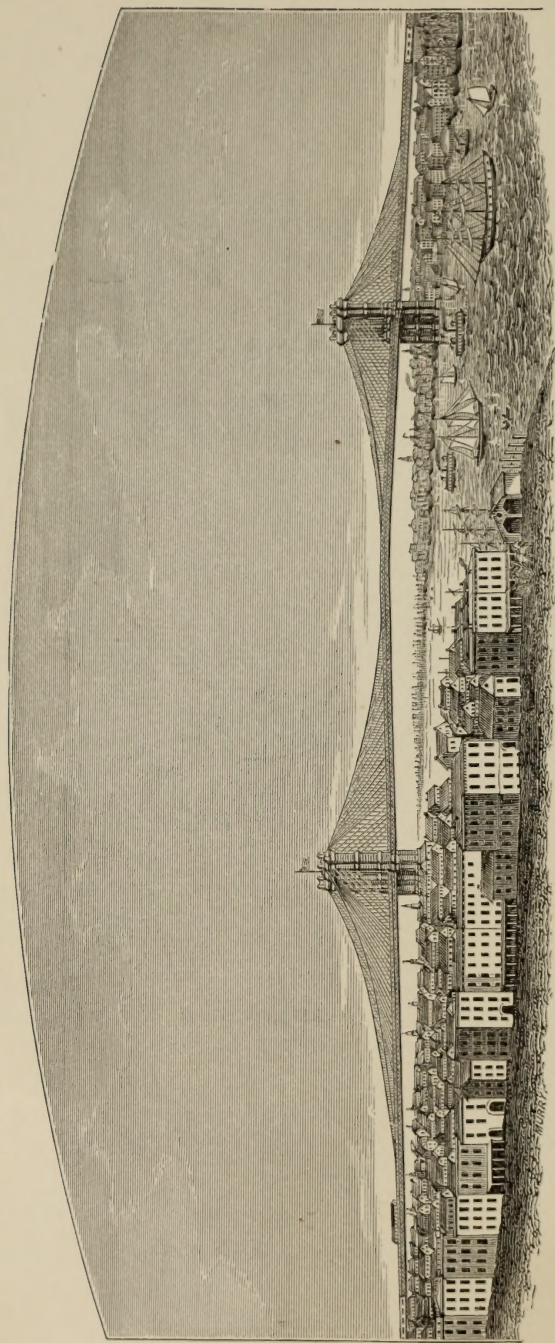

EAST RIVER BRIDGE.—See page 379.

A TREATISE
ON
CIVIL ENGINEERING.

BY
D. H. MAHAN, LL.D.,
LATE PROFESSOR OF CIVIL ENGINEERING AT WEST POINT, N. Y.

REVISED AND EDITED, WITH ADDITIONS AND NEW PLATES,

By DE VOLSON WOOD,

PROFESSOR OF MATHEMATICS AND MECHANICS IN STEVENS' INSTITUTE OF TECHNOLOGY
(FORMERLY PROFESSOR OF CIVIL ENGINEERING IN THE UNIVERSITY OF MICHIGAN);
AUTHOR OF A TREATISE ON THE RESISTANCE OF MATERIALS;
TREATISE ON BRIDGES AND ROOFS, ETC.

NEW YORK:
JOHN WILEY & SON,
15 ASTOR PLACE,
1873.

ENTERED, according to Act of Congress, in the year 1873, by
JOHN WILEY,
In the Office of the Librarian of Congress, at Washington, D. C.

POOLE & MACLAUCHLAN,
PRINTERS AND BOOKBINDERS,
205-213 *East 12th St.*,
NEW YORK.

PREFACE.

THE works of the late Professor Mahan are too well and too favorably known to need special comment from the present Editor.

The first edition of his work on Civil Engineering appeared when engineering as a learned profession was scarcely recognized in this country, and when but a very limited amount of instruction upon the science which pertains to it was given in our schools. Descriptions of processes and of works executed were the essential means of giving the information which was needed by the engineer. This determined the essential characteristic of his work, which is *descriptive*.

More recently, numerous schools have been established, which are intended to give thorough instruction in the science of engineering, and in which the courses of instruction are largely filled with *mathematical analysis*. But analysis alone, however important, can never take the place of descriptive matter. Every successful structure serves as a guide in the construction of all future similar works. Thus the experience of one may become the wisdom of many.

Before his untimely death, Professor Mahan had prepared

a thorough revision of this work, and about one-third of it had passed through the press when the present Editor took charge of it.

I have endeavored to do full justice to the original author by preserving the essential character of the work, and retaining nearly all the matter which he had prepared ; still, I have omitted a few paragraphs which were deemed non-essential, and condensed others. I have also added considerable new matter, which is scattered throughout that portion of the work which I have had in charge. I trust that my labors have added to the value of the work.

DE V. W.

CONTENTS.

CHAPTER I.

GENERAL PROPERTIES OF BUILDING MATERIALS.

ARTICLE.	PAGE.
1-2. Introductory Remark.....	3
I. STONE.	
3-16. Silicious Stones.....	4
17-20. Argillaceous Stones.....	8
21-29. Calcareous Stones.....	9
30-36. Gypsum—Durability of Stone.....	13
37-38. Effects of Heat—Hardness of Stone.....	15
II. LIME.	
38-41. Classification.....	18
42-49. Hydraulic Limes and Cements.....	19
50-55. Physical Characteristics of Hydraulic Limestones.....	23
56-60. Calcination of Limestone.....	25
III. LIME-KILNS.	
61-76. Descriptions of Lime-kilns.....	27
77. Calcination of the Stone.....	36
78-95. Reducing Calcined Stone to Powder.....	37
96-103. Artificial Hydraulic Limes and Cements.....	41
104-114. Puzzolanas.....	43
IV. MORTAR.	
115-120. Classification—Qualities.....	46
121-127. Sand, Properties of.....	47
128-134. Hydraulic Mortar.....	48
135-138. Mortars exposed to Weather.....	50
139-142. Manipulations of Mortar—Machines for.....	51
143-150. Setting and Durability of Mortars.....	57
151-152. Theory of the Hardening of Mortars.....	58
V. CONCRETE BETON.	
153-157. Concrete—Manufacture and Uses.....	59
158-166. Béton—Manufacture and Uses.....	60

ARTICLE.	PAGE.
167. Ransome's Artificial Stone.....	63
168-182. Béton Aggloméré.....	64
183-186. Adherence of Mortar.....	73
VI. MASTICS.	
187-198. Composition of—Bituminous Mastic.....	74
VII. BRICKS.	
199-211. Common Brick—Fire-Brick—Tile.....	77
VIII. WOOD.	
212-214. Timber—Parts of the Trunk of a Tree.....	79
215-217. Felling Trees—Time and Treatment.....	80
218-225. Methods of Seasoning Timber.....	81
226. Wet and Dry Rot.....	83
227-239. Preservation of Timber.....	83
240-242. Durability of Timber.....	86
243-248. Forest Trees of the United States which are used for Timber.....	86
IX. METALS.	
249-263. Cast Iron, Qualities of.....	89
264-277. Wrought Iron, Qualities of.....	92
278-289. Durability of Iron.....	94
290-298. Preservatives of Iron.....	95
299. Corrugated Iron.....	97
300. Steel.....	98
301. Copper.....	98
302. Zinc.....	99
303. Tin.....	99
304. Lead.....	99
X. PAINT AND VARNISHES.	
305-308. Composition and Uses of Paints.....	100
309-313. Composition and Uses of Varnishes.....	100
314. Zoöfagous Paint.....	103
315. Methods of Preserving Exposed Surfaces of Stone.....	103

CHAPTER II.

EXPERIMENTAL RESEARCHES ON THE STRENGTH OF MATERIALS.

316-326. Physical Properties of Bodies.....	106
327-335. Strength of Stone.....	109
336-342. Strength of Mortars and Cements.....	115
343-347. Strength of Timber.....	119
348-365. Strength of Cast Iron.....	131
366-367. Effect of Impact upon Cast-Iron Bars.....	144
368-374. Strength of Wrought Iron.....	147

ARTICLE.	PAGE.
375. Strength of Steel.....	163
376. Strength of Copper.....	166
377. Effects of Temperature on the Tensile Strength.....	167
378. Strength of Cast Tin, of Cast Lead, hard Gun-metal.....	167
379. Coefficients of Linear Expansion due to Heat.....	167
380. Adhesion of Iron Spikes to Timber.....	170

CHAPTER III.

MASONRY.

I. Classification Masonry.....	174
II. Cut-stone Masonry.....	174
III. Rubble-stone Masonry.....	183
IV. Brick Masonry.....	183

V. FOUNDATIONS OF STRUCTURES ON LAND.

417-418. Definition—Importance.....	190
420. Classification of Soils.....	190
421-423. Foundations on Rock.....	191
424-425. Foundations on Sand.....	192
426-430. Foundations on Compressible Soils.....	192
431-440. Foundations on Piles.....	196
441-443. Sand for Bed of Foundation.....	203

VI. FOUNDATIONS OF STRUCTURES IN WATER.

444-449. Coffor-Work—Caisson.....	208
452-455. Foundations on Heavy Blocks of Loose Stone.....	217
456. Pneumatic Processes.....	220
457-458. Pneumatic Piles.....	220
459. Pneumatic Caissons. ST. LOUIS BRIDGE.....	229
EAST RIVER BRIDGE.....	234

VII. CONSTRUCTION OF MASONRY.

461-466. Foundation Courses—Construction of.....	236
467. Classification of Structures of Masonry.....	238
468. Walls of Enclosures.....	238
469. Walls for Vertical Supports.....	239
470. Areas.....	239
471-479. Retaining Walls. FORM AND DIMENSIONS.....	239
480-490. Modes of Strengthening Retaining Walls—Counterforts—Relieving Arches.....	244
491-492. Lintel—Plate-Bande.....	247
493-503. Arches—Definitions—Annular Arches—Dome.....	248
504-513. Details of the Masonry of Arches.....	252
514-516. Angle of Rupture.....	257
517-519. Remarks upon the Strengthening of Abutments.....	258
520. Precautions against Settling.....	258
521-523. Pointing of Masonry.....	259
524-526. Repairs of Masonry.....	260
527. Effects of Temperature on Masonry.....	261

ARTICLE.	CHAPTER IV.	PAGE.
FRAMING.		
528-539.	General Principles.....	263
540.	Solid-built Beams.....	265
541-547.	Joints of Different Kinds.....	267
548.	Open-built Beams.....	271
549-550.	Framing for Intermediate Supports.....	272
551.	Experiments on the Strength of Frames.....	274
552-553.	Wooden Arches.....	277
CHAPTER V.		
BRIDGES.		
554.	Classification of Bridges.....	279
II. STONE BRIDGES.		
555-556.	Location of Stone Bridges.....	279
557-561.	Survey—Management of the Water-way.....	280
562.	Number of Bays.....	282
563-567.	Classification of Arches—Definitions.....	282
568.	Oblique Arches.....	285
569.	Arched Bridges.....	289
570-576.	Centring for Arches.....	289
577.	Style of Architecture.....	294
578-587.	Construction of the Foundations.....	294
588-590.	Superstructure.....	302
591-592.	Approaches—Water-wings.....	305
593-594.	Enlargement of the Water-way—General Remarks.....	306
595-596.	Table of Bridges.....	308
III. WOODEN BRIDGES.		
597-604.	Timber Foundations.....	310
605-606.	Definitions of Terms.....	314
607.	Long's Truss.....	315
608.	Town's Truss.....	316
609.	Howe's Truss.....	317
610.	Schuylkill Bridge.....	317
611.	Burr's Truss.....	318
612.	Pratt's Truss.....	320
613.	McCallum's Truss.....	320
614.	Canal Bridge.....	320
615.	Wooden Arches.....	321
616-621.	General Remarks.....	322
622.	Architecture of Wooden Bridges.....	324
623.	Table of Wooden Bridges.....	324
IV. CAST-IRON BRIDGES.		
624-627.	General Remarks.....	325
628-630.	Cast-iron Arches.....	327

ARTICLE	PAGE.
631. Open Cast-iron Beams.....	331
632. Effects of Temperature on Stone and Cast-iron Bridges.....	331

V. IRON TRUSSED BRIDGES.

633. Whipple's Trapezoidal Truss.....	332
634. Modification of Whipple's Truss.....	334
635. Linville's Bridge.....	334
636. Whipple's Arched Truss.....	337
637. Bollman's Truss.....	337
638. Fink's Truss.....	338
639. Post's Truss.....	339
640. Alleghany River Bridge.....	344
641. St. Louis and Illinois Bridge.....	344
642. Kuilenberg Bridge.....	347

VI. TUBULAR BRIDGES.

643. Tubular Frames of Wrought Iron.....	347
644. Experiments with a Model Tube.....	349
645. Britannia Tubular Bridge.....	350
646. Formula for Computing the Strength of Wrought-iron Tubes	354
647. Victoria Bridge.....	354

VII. SUSPENSION BRIDGES.

648-653. General Remarks.....	357
654-655. Anchorage.....	359
656-658. Position and Construction of the Cables.....	360
659. Vertical Suspension Bars.....	361
660-662. Construction of Wire Cables.....	361
663-664. Construction of the Piers and Abutments.....	362
665. Main Chains, &c.....	363
666. Attachment of Suspending Chains.....	364
667. Roadway.....	364
668. Vibrations.....	365
669. Means of Preserving the Chains.....	366
670. Proofs of Suspension Bridges.....	366
671. Durability.....	367
672. Suspension Bridge near Berwick, England.....	368
673. Menai Bridge.....	368
674. Fribourg Bridge.....	370
675. Hungerford and Lambeth Bridge.....	371
676. Monongahela Wire Bridge.....	373
677. Niagara Railroad Suspension Bridge.....	374
678. East River Suspension Bridge.....	379

VIII. MOVABLE BRIDGES.

679. Definitions.....	380
680. Draw Bridges.....	381
681. Turning Bridges.....	384
682. Swing Bridge at Providence, Rhode Island.....	385
683. Rolling Bridges.....	391
684. Boat Bridges.....	391

ARTICLE.	PAGE.
IX. AQUEDUCT BRIDGES.	
685. General Principles.....	391
686. Canal Aqueducts.....	392
687. Trunk of Cast Iron or Timber.....	392

CHAPTER VI.

ROOFS.

688. Definition.....	393
689. Remark.....	393
690. General Data.....	393
691. Weight of Snow.....	394
692. The Force of Wind.....	394
693. Ordinary Roof Truss.....	394
695. An Iron Roof Truss.....	396
696. Roof of a Gas-House.....	397
697. An Example of Trussing.....	398
698. Depot Roof Truss.....	399
699. Roof of a Rolling Mill.....	400
700. Truss of the State Capitol, Vermont.....	400
701. Example of Roof at the University of Michigan.....	402

CHAPTER VII.

ROADS.

702. Establishing a Common Road.....	403
703. Reconnaissance.....	403
704-708. Surveying and Locating Common Roads.....	405
709. Gradients.....	407
710-713. Final Location.....	408
714-720. Earthwork—Excavations and Embankments.....	411
721. Drainage.....	416
722. Road-coverings.....	419
723. Pavements—Wood and Stone.....	420
724. McAdam and Telford Roads.....	423
726. Gravel Roads.....	425
728. Asphaltic Roads.....	427
729. Repairing Common Roads.....	428
730. Cross Dimensions of Common Roads.....	429
731. Plank Roads.....	430

II. RAILWAYS.

732. Definition.....	430
733-736. Rails.....	430
737. Supports.....	433
738. Ballast.....	434
739. Temporary Railways.....	434
740. Gauge.....	435
742. Curves.....	436
743. Sidings, etc.....	436
746-747. Gradients.....	438
748-753. Tunnels.....	439

ARTICLE.	PAGE.
754-768. Experiments of Baron Von Weber on the Stability of the Permanent Way	442
755. Stability of Rails to Lateral Pressure.....	42
756. Stability of the Permanent Way.....	43
757. Stability of the Permanent Way to Resist Horizontal Displacement.....	444
759. Stability of the Rails on the Sleepers.....	448
762-763. Experiments on the Resisting Power of Railway Spikes.....	451
764. Experiments on the Effect of Bed-plates.....	454
765. Force Required to Draw Spikes.....	456
766. Total Resistance due to Spikes and Friction.....	458
768. Weber's Deductions from Tabulated Results.....	461
769. Sleepers.....	462
770. Rail Joints.....	464
771-776. Steel Rails.....	464

CHAPTER VIII.

CANALS.

777-780. General Remarks.....	467
781. Cross Section.....	470
782-783. Supply of Water.....	471
784-786. Locks—Use of, etc.....	472
787-793. Feeders and Reservoirs.....	474
794. Lifts of Locks.....	479
795. Levels.....	480
796-815. Locks—Principles of Construction.....	482
816-817. Accessory Works—Culverts.....	488
818-819. Aqueducts—Canal Bridges.....	489
820-822. Waste-weir—Guard Lock.....	490
823. General Dimensions of Canals.....	491
824. Locomotion on Canals.....	493

CHAPTER IX.

RIVERS.

825-829. Natural Features of Rivers.....	494
830-831. River Improvements.....	495
832-833. Means of Protecting the Banks—Inundations.....	496
834-841. Elbows—Bars.....	497
842-849. Slack-water Navigation.....	501

CHAPTER X.

SEA-COAST IMPROVEMENTS.

850-854. Classification—Action of Tides.....	504
855-856. Roadsteads.....	506
857-863. Harbors.....	508
864-866. Quays.....	511
867. Dikes.....	512
868. Groins.....	513
869. Sea-walls.....	513

ELEMENTARY COURSE
OF
CIVIL ENGINEERING.

CHAPTER I.

BUILDING MATERIALS.

I. STONE. II. LIME. III. LIMEKILNS. IV. MORTARS.
V. CONCRETES AND BETONS. VI. MASTICS. VII. BRICK.
VIII. WOOD. IX. METALS. X. PAINTS, VARNISHES,
ETC.

SUMMARY.

BUILDING-MATERIALS, their properties, application, and classification
(Arts. 1-2).

I.

STONE.

SILICIOUS STONES.—Sienite, Porphyry, Green-Stone, Granite and Gneiss,
Mica Slate, Buhr or Mill Stone, Horn-Stone, Steatite or Soap-Stone,
Talcose Slate, and Sand-Stone (Arts. 3-16).

ARGILLACEOUS STONES.—Roofing-Slate, Graywacke Slate, and Hornblende
Slate (Arts. 17-20).

CALCAREOUS STONES.—Common Limestone. MARBLES.—Statuary Marble,
Conglomerate Marble, Birdseye Marble, Lumachella Marble, Verd
Antique Marble, Veined, Golden, Italian, Irish, etc., Marbles. Localities
where the Limestones and Marbles are found and quarried for use (Arts.
21-29), Gypsum (Art. 30).

Durability of Stone (Arts. 31-36).

Effects of heat on Stone (Art. 37).

Hardness of Stone (Art. 38).

II.

LIME.

CLASSIFICATION OF LIME.—Common lime, Hydraulic lime, Hydraulic cement, Limestones that yield Hydraulic limes and Hydraulic cements, Analyses of these stones (Arts. 39-49). Physical characters and tests of Hydraulic Limestones (Arts. 50-55). Calcination of Limestones (Arts. 56-60).

III.

LIMEKILNS.

CLASSIFICATION AND KINDS OF (Arts. 61-77). Methods of reducing calcined stone to powder; by slaking; by grinding (Arts. 78-95). Artificial hydraulic limes and cements (Arts. 96-103). Puzzolana, etc. (Arts. 104-114).

IV.

MORTAR.

CLASSIFICATION OF (Arts. 115-116). Uses of (Art. 117). Qualities of, on what dependent (Arts. 117-120). Classification of Sand (Arts. 121-127). Composition of Hydraulic mortar (Arts. 128-134). Mortar exposed to weather (Arts. 135-138). Manipulation of Mortar and Concrete (Arts. 139-142). Setting and durability of Mortar (Arts. 143-150). Theory of Mortars (151-152).

V.

CONCRETES AND BETONS.

CONCRETE OF COMMON LIME, MANUFACTURE AND USES (Arts. 154-157). Beton, its composition, manufacture and uses (Arts. 158-161). Beton Coignet (Arts. 162-166). Ransome's artificial stone (Art. 167). Beton aggloméré (Arts. 168-182). Adhesion of Mortar to other materials (Arts. 183-186).

VI.

MASTICS.

MASTICS, COMPOSITION OF (Art. 187). Bituminous Mastic, Composition and Manufacture of (Arts. 188-198).

VII.

BRICK.

PROPERTIES, USES AND MANUFACTURE OF (Arts. 199-209). Fire-Brick (Art. 210). Tiles (Art. 211).

VIII.

WOOD.

TIMBER, KINDS OF (Art. 212). Parts and properties of the trunks of Trees (Arts. 213-214). Felling of Trees (Arts. 215-216). Girdling and barking trunks of Trees (Art. 217). Methods of seasoning Timber (Arts. 224-225). Wet and dry rot (Art. 226). Preservation of Timber (Arts. 227-242). Forest Trees of the United States (Arts. 243-248).

IX.

METALS.

CAST IRON, VARIETIES OF (Arts. 249-263). Wrought Iron, Varieties of (Arts. 264-277). Durability of Iron (Arts. 278-289). Preservatives of Iron (Arts. 290-298). Corrugated Iron (Art. 299). Steel (Art. 300).

COPPER and its alloys (Art 301).

ZINC and its alloys (Art. 302).

TIN (Art. 303).

LEAD (Art. 304).

X.

PAINTS AND VARNISHES.

PAINTS, COMPOSITION, USES AND DURABILITY OF (Arts. 305-308). Varnishes, Composition and Uses of (Arts. 309-311). Varnish for Zincked Iron (Arts. 312-313). Zoofagous Paint (Art 314). Methods of preserving exposed surfaces of Stone (Art. 315).

1. A KNOWLEDGE of the properties of building materials is one of the most important branches of Civil Engineering. An engineer, to be enabled to make a judicious selection of materials, and to apply them so that the ends of sound economy and skilful workmanship shall be equally subserved, must know:—

1st. Their ordinary durability under the various circumstances in which they are employed, and the means of increasing it when desirable.

2d. Their capacity to sustain, without injury to their physical qualities, permanent strains, whether exerted to crush them, tear them asunder, or to break them transversely.

3d. Their resistance to rupture and wear, from percussion and attrition.

4th. Finally, the time and expense necessary to convert them to the uses for which they may be required.

2. The materials in general use for civil constructions may be arranged under the three following heads:—

1st. Those which constitute the more solid components of structures, as *Stone, Brick, Wood,* and the *Metals*.

2d. The cements in general, as *Mortar, Mastics, Glue,* etc., which are used to unite the more solid parts.

3d. The various mixtures and chemical preparations, as solutions of *Salts, Paints, Bituminous Substances,* etc., employed to coat the more solid parts, and protect them from the chemical and mechanical action of atmospheric changes, and other causes of destructibility.

I.

STONE.

3. The term *Stone, or Rock,* is applied to any aggregation of several mineral substances.

Stones, for the convenience of description, may be arranged under three general heads—the *silicious,* the *argillaceous,* and the *calcareous.*

4. SILICIOUS STONES. The stones arranged under this head receive their appellation from *silex,* the principal constituent of the minerals which compose them. They are also frequently designated, either according to the mineral found most abundantly in them, or from the appearance of the stone, as *feldspathic, quartzose, arenaceous,* etc.

5. The silicious stones generally do not effervesce with acids, and emit sparks when struck with a steel. They possess, in a high degree, the properties of strength, hardness, and durability; and, although presenting great diversity in the degree of these properties, as well as in their structure, they furnish an extensive variety of the best stone for the various purposes of the engineer and architect.

6. *Sienite, Porphyry,* and *Green-stone,* from the abun-

dance of feldspar which they contain, are often designated as feldspathic rocks. For durability, strength, and hardness, they may be placed in the first rank of silicious stones.

7. Sienite consists of a granular aggregation of feldspar, hornblende, and quartz. It furnishes one of the most valuable building stones, particularly for structures which require great strength, or are exposed to any very active causes of destructibility, as sea walls, lighthouses, and fortifications. Sienite occurs in extensive beds, and may be obtained, from the localities where it is quarried, in blocks of any requisite size. It does not yield easily to the chisel, owing to its great hardness, and when coarse-grained it cannot be wrought to a smooth surface. Like all stones in which feldspar is found, the durability of sienite depends essentially upon the composition of this mineral, which, owing to the potash it contains, sometimes decomposes very rapidly when exposed to the weather. The durability of feldspathic rocks, however, is very variable, even where their composition is the same; no pains should therefore be spared to ascertain this property in stone taken from new quarries, before using it for important public works.

8. Porphyry. This stone is usually composed of compact feldspar, having crystals of the same, and sometimes those of other minerals, scattered through the mass. Porphyry furnishes stones of various colors and texture; the usual color being reddish, approaching to purple, from which the stone takes its name. One of the most beautiful varieties is a *brecciated* porphyry, consisting of angular fragments of the stone united by a cement of compact feldspar. Porphyry, from its rareness and extreme hardness, is seldom applied to any other than ornamental purposes. The best known localities of sienite and porphyry in the United States are in the neighborhood of Boston.

9. Green-stone. This stone is a mixture of hornblende with common and compact feldspar, presenting sometimes a granular though usually a compact texture. Its ordinary color, when dry, is some shade of brown; but, when wet, it becomes greenish, from which it takes its name. Green-stone is very hard, and one of the most durable rocks; but, occurring in small and irregular blocks, its uses as a building stone are very restricted. When walls of this stone are built with very white mortar, they present a picturesque appearance, and it is on that account well adapted to rural architecture. Green-stone might also be used as a material

for road-making; large quantities of it are annually taken from the principal locality of this rock in the United States, so well known as the Palisades, on the Hudson, for constructing wharves, as it is found to withstand well the action of salt water.

10. Granite and Gneiss. The constituents of these two stones are the same, being a granular aggregation of quartz, feldspar, and mica, in variable proportions. They differ only in their structure—gneiss being a stratified rock, the ingredients of which occur frequently in a more or less laminated state. Gneiss, although less valuable than granite, owing to the effect of its structure on the size of the blocks which it yields, and from its not splitting as smoothly as granite across its beds of stratification, furnishes a building stone suitable for most architectural purposes. It is also a good flagging material, when it can be obtained in thin slabs.

Granite varies greatly in quality according to its texture and the relative proportion of its constituents. When the quartz is in excess, it renders the stone hard and brittle, and very difficult to be worked with the chisel. An excess of mica usually makes the stone friable. An excess of feldspar gives the stone a white hue, and makes it freer under the chisel. The best granites are those with a fine grain, in which the constituents seem uniformly disseminated through the mass. The color of granite is usually some shade of gray; when it varies from this, it is owing to the color of the feldspar. One of its varieties, known as *Oriental granite*, has a fine reddish hue, and is chiefly used for ornamental purposes. Granite is sometimes mistaken for sienite, when it contains but little mica.

The quality of granite is affected by the foreign minerals which it may contain; hornblende is said to render it tough, and schorl makes it quite brittle. The protoxide and sulphurets of iron are the most injurious in their effects on granite; the former by conversion into a peroxide, and the latter, by decomposing, destroying the structure of the stone, and causing it to break up and disintegrate.

Granite, gneiss, and sienite, differ so little in their essential qualities, as a building material, that they may be used indifferently for all structures of a solid and durable character. They are extensively quarried in most of the New England States, in New York, and in some of the other States intersected by the great range of primitive rocks, where the quarries lie contiguous to tidewater.

11. Mica Slate. The constituents of this stone are quartz

and mica, the latter predominating. It is principally used as a *flagging* stone, and as a *fire* stone, or lining for furnaces.

12. Buhr or Mill stone. This is a very hard, durable stone, presenting a peculiar, honeycomb appearance. It makes a good building material for common purposes, and is also suitable for road coverings.

13. Horn-stone. This is a highly silicious and very hard stone. It resembles flint in its structure, and takes its name from its translucent, horn-like appearance. It furnishes a very good road material.

14. Steatite, or Soap-stone. This stone is a partially indurated talc. It is a very soft stone, not suitable for ordinary building purposes. It furnishes a good fire-stone, and is used for the lining of fireplaces.

15. Talcose Slate. This stone resembles mica slate, being an aggregation of quartz and talc. It is applied to the same purposes as mica slate.

16. Sand-stone. This stone consists of grains of silicious sand, arising from the disintegration of silicious rocks, which are united by some natural cement, generally of an argillaceous or a silicious character.

The strength, hardness, and durability of sand-stone vary between very wide limits. Some varieties being little inferior to good granite, as a building stone, others being very soft, friable, and disintegrating rapidly when exposed to the weather. The least durable sand-stones are those which contain the most argillaceous matter; those of a feldspathic character are also found not to withstand well the action of the weather.

Sand-stone is used very extensively as a building stone, for flagging, for road materials, and some of its varieties furnish an excellent fire-stone. Most of the varieties of sand-stone yield readily under the chisel and saw, and split evenly, and, from these properties, have received from workmen the name of *free-stone*. The colors of sand-stone present also a variety of shades, principally of gray, brown, and red.

The formations of sand-stone in the United States are very extensive, and a number of quarries are worked in New England, New York, and the Middle States. These formations, and the character of the stone obtained from them, are minutely described in the *Geological Reports of these States*, which have been published within the last few years.

Most of the stone used for the public buildings in Wash-

ington is a sand-stone obtained from quarries on Acquia Creek and the Rappahannock. Much of this stone is feldspathic, possesses but little strength, and disintegrates rapidly. The red sand-stones which are used in our large cities are either from quarries in a formation extending from the Hudson to North Carolina, or from a separate deposit in the Valley of the Connecticut. The most durable and hard portions of these formations occur in the neighborhood of trap dikes. The fine flagging-stone used in our cities is mostly obtained either from the Connecticut quarries, or from others near the Hudson, in the Catskill group of mountains. Many quarries, which yield an excellent building stone, are worked in the extensive formations along the Appalachian range, which extends through the interior, through New York and Virginia, and the intermediate States.

17. Argillaceous Stones. The stones arranged under this head are mostly composed of clay, in a more or less indurated state, and presenting a laminated structure. They vary greatly in strength, and are generally not durable, decomposing in some cases very rapidly, from changes in the metallic sulphurets and salts found in most of them. The uses of this class of stones are restricted to roofing and flagging.

18. Roofing Slate. This well-known stone is obtained from a hard, indurated clay, the surfaces of the lamina having a natural polish. The best kinds split into thin, uniform, light slabs; are free from sulphurets of iron; give a clear ringing sound when struck; and absorb but little water. Much of the roofing slate quarried in the United States is of a very inferior quality, and becomes rotten, or decomposes, after a few years' exposure. The durability of the best European slate is about one hundred years; and it is stated that the material obtained from some of the quarries worked in the United States is not apparently inferior to the best foreign slate brought into our markets. Several quarries of roofing slate are worked in the New England States, New York and Pennsylvania.

19. Graywacke Slate. The composition of this stone is mostly indurated clay. It has a more earthy appearance than argillaceous slate, and is generally distinctly arenaceous. Its colors are usually dark gray, or red. It is quarried principally for flagging-stone.

20. Hornblende Slate. This stone, known also as green-stone slate, properly belongs to the silicious class. It con-

sists mostly of hornblende having a laminated structure. It is chiefly quarried for flagging-stone.

21. Calcareous Stones. Lime is the principal constituent of this class, the carbonates of which, known as *limestone* and *marble*, furnish a large amount of ordinary building stone, most of the ornamental stones, and the chief ingredient in the composition of the cements and mortars used in stone and brick work. Limestone effervesces copiously with acids; its texture is destroyed by a strong heat, which also drives off its carbonic acid and water, converting it into *quick lime*. By absorbing water, quick-lime is converted into a *hydrate*, or what is known as *slaked lime*; considerable heat is evolved during this chemical change, and the stone increases in bulk, and gradually crumbles down into a fine powder.

The limestones present great diversity in their physical properties. Some of them seem as durable as the best silicious stones, and are but little inferior to them in strength and hardness; others decompose rapidly on exposure to the weather; and some kinds are so soft, that when first quarried, they can be scratched with the nail, and broken between the fingers.

The limestones are generally impure carbonates; and we are indebted to these impurities for some of the most beautiful, as well as the most valuable materials used for constructions. Those which are colored by metallic oxides, or by the presence of other minerals, furnish the large number of colored and variegated marbles; while those which contain a certain proportion of clay, or of magnesia, yield, on calcination, those cements which, from their possessing the property of hardening under water, have received the various appellations of *hydraulic lime*, *water lime*, *Roman cement*, etc.

Limestone is divided into two principal classes, *granular limestone* and *compact limestone*. Each of these furnishes both the marbles and ordinary building stone. The varieties not susceptible of receiving a polish are sometimes called *common limestone*.

The granular limestones are generally superior to the compact for building purposes. Those which have the finest grain are the best, both for marbles and ordinary building stone. The coarse-grained varieties are frequently friable, and disintegrate rapidly when exposed to the weather. All the varieties, both of the compact and granular, work freely under the chisel and grit-saw, and may be obtained

in blocks of any suitable dimensions for the heaviest structures.

The durability of limestone is very materially affected by the foreign minerals it may contain; the presence of clay injures the stone, particularly when, as sometimes happens, it runs through the bed in very minute veins: blocks of stone having this imperfection soon separate along these veins on exposure to moisture. The protoxide, the proto-carbonate, and the sulphuret of iron, are also very destructive in their effects; frequently causing, by their chemical changes, rapid disintegration.

Among the varieties of impure carbonates of lime, the *magnesian* limestones, called *dolomites*, merit to be particularly noticed. They are regarded in Europe as a superior building material; those being considered the best which are most crystalline, and are composed of nearly equal proportions of the carbonates of lime and magnesia. Some of the quarries of this stone, which have been opened in New York and Massachusetts, have given a different result; the stone obtained from them being, in some cases, extremely friable.

22. Marbles.—The term marble is now applied exclusively to any limestones which will receive a polish. Owing to the cost of preparing marble, it is mostly restricted in its uses to ornamental purposes. The marbles present great variety, both in color and appearance, and have generally received some appropriate name descriptive of these accidents.

23. Statuary Marble is of the purest white, finest grain, and free from all foreign minerals. It receives that delicate polish, without glare, which admirably adapts it to the purposes of the sculptor, for whose use it is mostly reserved.

24. Conglomerate Marble. This consists of two varieties; the one termed *pudding* stone, which is composed of rounded pebbles embedded in compact limestone; the other termed *breccia*, consisting of angular fragments united in a similar manner. The colors of these marbles are generally variegated, forming a very handsome ornamental material.

25. Bird's-eye Marble. The name of this stone is descriptive of its appearance, which arises from the cross sections of a peculiar fossil (*fucoïdes demissus*) contained in the mass, made in sawing or splitting it.

26. Lumachella Marble. This is obtained from a limestone having shells embedded in it, and takes its name from this circumstance.

27. Verd Antique. This is a rare and costly variety, of a beautiful green color, caused by veins and blotches of *serpentine* diffused through the limestone.

28. The terms *veined, golden, Italian, Irish, etc.*, given to the marbles found in our markets are significant of their appearance, or of the localities from which they are procured.

29. Limestone is so extensively diffused throughout the United States, and quarried, either for building stone or to furnish lime, in so many localities, that it would be impracticable to enumerate all within any moderate compass. One of the most remarkable formations of this stone extends, in an uninterrupted bed, from Canada, through the States of Vermont, Mass., Conn., New York, New Jersey, Penn., and Virg., and in all probability much farther south.

Marbles are quarried in various localities in the United States. Among the most noted are the quarries in Berkshire Co., Mass., which furnish both pure and variegated marbles; those on the Potomac, from which the columns of conglomerate marbles were obtained that are seen in the interior of the Capitol at Washington; several in New York, which furnish white, the bird's-eye, and other variegated kinds; and some in Conn., which, among other varieties, furnish a verd antique of handsome quality.

Limestone is burned, either for building or agricultural purposes, in almost every locality where deposits of the stone occur. Thomaston, in Maine, has supplied for some years most of the markets on the sea-board with a material which is considered as a superior article for ordinary building purposes. One of the greatest additions to the building resources of our country was made in the discovery of the hydraulic or water limestones of New York. The preparation of this material, so indispensable for all hydraulic works and heavy structures of stone, is carried on extensively at Rondout, on the Delaware and Hudson canal, in Madison Co., and is sent to every part of the United States, being in great demand for all the public works carried on under the superintendence of our civil and military engineers. A not less valuable addition to our building materials has been made by Prof. W. B. Rogers, who, a few years since, directed the attention of engineers to the dolomites, for their good hydraulic properties. From experiments made by Vicat, in France, who first there observed the same properties in the dolomite, and from those in our country, it appears highly probable that the magnesian limestones, containing a certain proportion of magnesia, will be found fully equal to

the argillaceous, from which hydraulic lime has hitherto been solely obtained.

Both of these limestones belong to very extensive formations. The hydraulic limestones of New York occur in a deposit called the Water-lime Group, in the Geological Survey of New York corresponding to formation VI. of Prof. H. B. Rogers' arrangement of the rocks of Penn. This formation is co-extensive with the Helderberg Range as it crosses New York; it is exposed in many of the valleys of Penn. and Vir., west of the Great Valley. It may be sought for just below or not far beneath the Oriskany sand-stones of the New York Survey, which correspond to formation VII. of Rogers. This sand-stone is easily recognized, being of a yellowish white color, granular texture, with large cavities left by decayed shells. The limestone is usually an earthy drab-colored rock, sometimes a greenish blue, which does not slake after being burned.

The hydraulic magnesian limestones belong to the formations II. and VI. of Rogers; the first of these is the same as the Black River or Mohawk limestone of the New York Survey. It is the oldest fossiliferous limestone in the United States, and occurs throughout the whole bed, associated with the slates which occupy formation III. of Rogers, and are called the Hudson River Group in the New York Survey. This extensive bed lies in the great Appalachian Valley, known as the Valley of Lake Champlain, Valley of the Hudson, as far as the Highlands, Cumberland Valley, Valley of Virginia, and Valley of East Tennessee. The same stone is found in the deposits of some of the western valleys of the mountain region of Penn. and Virginia.

Thus far no deposits of hydraulic limestones have been found on the Pacific Coast.

The importance of hydraulic lime to the security of structures exposed to constant moisture renders a knowledge of the geological positions of those limestones from which it can be obtained an object of great interest. From the results of the various geological surveys made in the United States and in Europe, limestone, possessing hydraulic properties when calcined, may be looked for among those beds which are found in connection with the *shales*, or other argillaceous deposits. The celebrated *Roman* or *Parker's cement*, of England, which, from its prompt induration in water, has become an important article of commerce, is manufactured from nodules of a concretionary argillaceous limestone, called *septaria*, from being traversed by veins of sparry carbonate

of lime. Nodules of this character are found in Mass., and in some other States; and it is probable they would yield, if suitably calcined and ground, an article in nowise inferior to that imported.

30. GYPSUM, or PLASTER of PARIS. This stone is a sulphate of lime, and has received its name from the extensive use made of it at Paris, and in its neighborhood, where it is quarried and sent to all parts of the world; being of a superior quality, owing, it is stated, to a certain portion of carbonate of lime which the stone contains. Gypsum is a very soft stone, and is not used as a building stone. Its chief utility is in furnishing a beautiful material for the ornamental casts and mouldings in the interior of edifices. For this purpose it is prepared by calcining, or, as the workmen term it, *boiling* the stone, until it is deprived of its water of crystallization. In this state it is made into a thin paste, and poured into moulds to form the cast, in which it hardens very promptly. Calcined plaster of Paris is also used as a cement for stone; but it is eminently unfit for this purpose; for when exposed, in any situation, to moisture, it absorbs it with avidity, swells, cracks, and exfoliates rapidly.

Gypsum is found in various localities in the United States. Large quantities of it are quarried in New York, both for building and agricultural purposes.

31. DURABILITY OF STONE. The most important properties of stone, as a building material, are its durability under the ordinary circumstances of exposure to weather; its capacity to sustain, without change, high degrees of temperature; and its resistance to the destructive action of fresh and salt water.

The wear of stone from ordinary exposure is very variable, depending, not only upon the texture and constituent elements of the stone, but also upon the locality and position it may occupy in a structure, with respect to the prevailing driving rains. The chemist and geologist have not, thus far, laid down any infallible rules to guide the engineer in the selection of a material that may be pronounced durable for the ordinary period allotted to the works of man. In truth the subject admits of only general indications; for stones having the same texture and chemical composition, from causes not fully ascertained, are found to possess very different degrees of duration. This has been particularly noted in feldspathic rocks. As a general rule, those stones which are fine-grained, absorb

least water, and are of greatest specific gravity, are also most durable under ordinary exposures. The weight of a stone, however, may arise from a large proportion of iron in the state of a protoxide, a circumstance generally unfavorable to its durability. Besides the various chemical combinations of iron, potash and clay, when found in considerable quantities, both in the primary and sedimentary silicious rocks, greatly affect their durability. The potash contained in feldspar dissolves, and, carrying off a considerable proportion of the silica, leaves nothing but aluminous matter behind. The clay, on the other hand, absorbs water, becomes soft, and causes the stone to crumble to pieces. Iron in the form of protoxide, in some cases only, discolors the stone by its conversion into a peroxide.— This discoloration, while it greatly diminishes the value of some stones, as in white marble, in others is not disagreeable to the eye, producing often a mottled appearance in buildings which adds to the picturesque effect.

32. Frost, or rather the alternate actions of freezing and thawing, is the most destructive agent of Nature with which the engineer has to contend. Its effects vary with the texture of stones; those of a fissile nature usually splitting, while the more porous kinds disintegrate, or exfoliate at the surface.— When stone from a new quarry is to be tried, the best indication of its resistance to frost may be obtained from an examination of any rocks of the same kind, within its vicinity, which are known to have been exposed for a long period. Submitting the stone fresh from the quarry to the direct action of freezing would seem to be the most certain test, were the stone destroyed by the expansive action of the frost; but besides the uncertainty of this test, it is known that some stones, which, when first quarried, are much affected by frost, splitting under its action, become impervious to it after they have lost the moisture of the quarry, as they do not re-absorb near so large an amount as they bring from the quarry.

33. M. Brard, a French chemist, has given a process for ascertaining the effects of frost on stone, which has met with the approval of many French architects and engineers of standing, as it corresponds with their experience. M. Brard directs that a small cubical block, about two inches on the edge, shall be carefully sawed from the stone to be tested. A cold saturated solution of sulphate of soda is prepared, placed over a fire, and brought to the boiling point. The stone, suspended from a string, is immersed in the boiling liquid, and kept there during thirty minutes; it is then carefully withdrawn; the liquid is decanted free from sediment into a flat

vessel, and the stone is suspended over it in a cool cellar. An efflorescence of the salt soon makes its appearance on the stone, when it must be again dipped into the liquid. This should be done once or more frequently during the day, and the process be continued in this way for about a week. The earthy sediment, found at the end of this period in the vessel, is weighed, and its quantity will give an indication of the like effect of frost. This process, with the official statement of a commission of engineers and architects, by whom it was tested, is minutely detailed in vol. 38, *Annales de Chimie et de Physique*, and the results are such as to commend it to the attention of engineers in submitting new stones to trial.

34. From more recent experiments by Dr. Owen it was found that the results obtained by exposing the more porous stones to the alternate action of freezing and thawing during a portion of a winter were very different from those resulting from Brard's method, owing to the action of the salts being chemical as well as mechanical.

35. By the absorption of water, stones become softer and more friable. The materials for road coverings should be selected from those stones which absorb least water, and are also hard and not brittle. Granite, and its varieties, limestone, and common sand-stone, do not make good road materials of broken stone. All the hornblende rocks, porphyry, compact feldspar, and the quartzose rock associated with graywacke, furnish good, durable road coverings. The fine-grained granites which contain but a small proportion of mica, the fine-grained silicious sand-stones which are free from clay, and carbonate of lime, form a durable material when used in blocks for paving. Mica slate, talcose slate, hornblende slate, some varieties of gneiss, some varieties of sand-stone of a slaty structure, and graywacke slate, yield excellent materials for flag-stone.

36. The influence of locality on the durability of stone is very marked. Stone is observed to wear more rapidly in cities than in the country; and the stone in those parts of edifices exposed to the prevailing rains and winds, soonest exhibits signs of decay. The disintegration of the stratified stones placed in a wall is mainly effected by the position which the strata or *quarry bed* receives, with respect to the exposed surface; proceeding faster when the faces of the strata are exposed, than in the contrary position.

37. **EFFECTS OF HEAT.**—Stones which resist a high degree of heat without fusing are used for lining furnaces,

and are termed fire-stones. A good fire-stone should not only be infusible, but also not liable to crack or exfoliate from heat. Stones that contain lime, or magnesia, except in the form of silicates, are usually unsuitable for fire-stones. Some porous silicious limestones, as well as some gypsous silicious rocks, resist moderate degrees of heat. Stones that contain much potash are very fusible under high temperatures, running into a glassy substance. Quartz and mica, in various combinations, furnish a good fire-stone; as, for example, finely granular quartz with thin layers of mica, mica slate of the same structure, and some kinds of gneiss which contain a large proportion of arenaceous quartz. Several varieties of sand-stone make a good lining for furnaces. They are usually those varieties which are free from feldspar, somewhat porous, and are uncrystallized in the mass. Talcose slate likewise furnishes a good fire-stone.

38. RESISTANCE TO ATTRITION.—Hardness is an essential quality in stone exposed to wear from the attrition of hard bodies. Stones selected for paving, flagging, and steps for stairs, should be hard, and of a grain sufficiently coarse not to admit of becoming very smooth under the action to which they are submitted. As great hardness adds to the difficulty of working stone with the chisel, and to the cost of the prepared material, builders prefer the softer or *free-stones*, such as the limestones and sand-stones, for most building purposes. The following are some of the results, on this point, obtained from experiment:

Table showing the result of experiments made under the direction of Mr. Walker, on the wear of different stones in the tramway on the Commercial Road, London, from 27th March, 1830, to 24th August, 1831, being a period of seventeen months. Transactions of Civil Engineers, vol. 1.

Name of stone.	Sup. area in feet.	Original weight.			Loss of weight by wear.	Loss per sup. foot.	Relative losses.
		cwt.	qrs.	lbs.			
Guernsey	4.734	7	1	12.75	4.50	0.951	1.000
Herne	5.250	7	3	24.25	5.50	1.048	1.102
Budle	6.336	9	0	15.75	7.75	1.223	1.286
Peterhead (blue) .	3.484	4	1	7.50	6.25	1.795	1.887
Heytor	4.313	6	0	15.25	8.25	1.915	2.014
Aberdeen (red) . .	5.375	7	2	11.50	11.50	2.139	2.249
Dartmoor	4.500	6	2	25.00	12.50	2.778	2.921
Aberdeen (blue) .	4.823	6	2	16.00	14.75	3.058	3.216

The Commercial Road stoneway consists of two parallel lines of rectangular tramstones, 18 inches wide by 12 inches deep, and jointed to each other endwise, for the wheels to travel on, with a common street pavement between for the horses.

The following table gives the results of some experiments on the wear of a fine-grained sand-stone pavement, by M. Coriolis, during eight years, upon the paved road from Paris to Toulouse, the carriage over which is about 500 tons daily, published in the *Annales des Ponts et Chaussées*, for March and April, 1834:

Weight of a cubic foot	Volume of water absorbed by the dry stone after one day's immersion, compared with that of the stone.	Mean annual wear.
158lbs.	Neglected as insensible.	0.1023 inch.
154 "	"	0.1063 "
156 "	"	0.1299 "
150 "	$\frac{1}{8}$ in volume.	0.2126 "
148 "	$\frac{1}{7}$ "	0.2677 "

M. Coriolis remarks, that the weight of water absorbed affords one of the best indications of the durability of the fine-grained sand-stones used in France for pavements. An equally good test of the relative durability of stones of the same kind, M. Coriolis states, is the more or less clearness of sound given out by striking the stone with a hammer.

The following results are taken from an article by Mr. James Frost, *Civ. Engineer*, inserted in the *Journal of the Franklin Institute* for Oct. 1835, on the resistance of various substances to abrasion. The substances were abraded against a piece of white statuary marble, which was taken as a standard, represented by 100, by means of fine emery and sand. The relative resistance was calculated from the weight lost by each substance during the operation.

Comparative Resistance to Abrasion.

Aberdeen granite.....	980
Hard Yorkshire paving stone.....	327
Italian black marble.....	260
Kilkenny black marble.....	110
Statuary Marble.....	100
Old Portland stone.....	79
Roman Cement stone.....	69
Fine-grained Newcastle grindstone.....	53
Stock brick.....	34
Coarse-grained Newcastle grindstone.....	14
Bath stone.....	13

II.

LIME.

38. CLASSIFICATION OF LIME.—Considered as a building material, lime is now usually divided into three principal classes: *Common* or *Air lime*, *Hydraulic lime*, and *Hydraulic*, or *Water cement*.

39. Common, or air lime, is so called because the paste made from it with water will harden only in the air.

40. Hydraulic lime and hydraulic cement both take their name from hardening under water. The former differs from the latter in two essential points. It slakes thoroughly, like common lime, when deprived of its carbonic acid, and it does not harden promptly under water. Hydraulic cement, on the contrary, does not slake, and usually hardens very soon.

41. Our nomenclature, with regard to these substances, is still quite defective for scientific arrangement. For the limestones which yield hydraulic lime when completely calcined, also give an hydraulic cement when deprived of a portion only of their carbonic acid; and other limestones yield, on calcination, a result which can neither be termed lime nor hydraulic cement, owing to its slaking very imperfectly, and not retaining the hardness which it quickly takes when first placed under water.

M. Vicat, whose able researches into the properties of lime and mortars are so well known, has proposed to apply the term *cement limestones* (*calcaires à ciment*) to those stones which, when completely calcined, yield hydraulic cement, and which under no degree of calcination will give hydraulic lime. For the limestones which yield hydraulic lime when completely calcined, and which, when subjected to a degree of heat insufficient to drive off all their carbonic acid, yield hydraulic cement, he proposes to retain the name hydraulic limestones; and to call the cement obtained from their incomplete calcination *under-burnt* hydraulic cement (*ciments d'incuits*), to distinguish it from that obtained from the cement stone. With respect to those limestones which, by calcination, give a result that partakes partly of the properties both of limes and cements, he proposes for them the name of *dividing limes* (*charux limites*.)

The terms *fat* and *meager* are also applied to limes; owing to the difference in the quality of the paste obtained from them with the same quantity of water. The fat limes give a

paste which is unctuous both to the sight and touch. The meager limes yield a thin paste. These names were of some importance when first introduced, as they served to distinguish common from hydraulic lime, the former being always fat, the latter meager; but, later experience having shown that all meager limes are not hydraulic, the terms are no longer of use, except to designate qualities of the paste of limes.

42. Hydraulic Limes and Cements. The limestones which yield these substances are either *argillaceous*, or *magnesian*, or *argillo-magnesian*. The products of their calcination vary considerably in their hydraulic properties. Some of the hydraulic limes harden, or *set* very slowly under water, while others set rapidly. The hydraulic cements set in a very short time. This diversity in the hydraulic energy of the argillaceous limestones arises from the variable proportions in which the lime and clay enter into their composition.

43. M. Petot, a civil engineer in the French service, in an able work entitled *Recherches sur la Charauffournerie*, gives the following table, exhibiting these combinations, and the results obtained from their calcination.

Lime.	Clay.	Resulting products.	Distinctive characters of the products.
100	0	Very fat lime.	Incapable of hardening in water.
90	10	Lime a little hydraulic.	{ Slakes like pure lime, when properly calcined, and hardens under water.
80	20	do. quite hydraulic.	
70	30	do. do.	{ Does not slake under any circumstances, and hardens under water with rapidity.
60	40	Plastic, or hydraulic cement.	
50	50	do.	{ Does not slake nor harden under water, unless mixed with a fat or an hydraulic lime.
40	60	do.	
30	70	Calcareous puzzolano (brick).	{ Same as the preceding.
20	80	do. do.	
10	90	do. do.	
0	100	Puzzolano of pure clay do.	

44. The most celebrated European hydraulic cements are obtained from argillaceous limestones, which vary but slightly in their constituent elements and properties. The following table gives the results of analyses to determine the relative proportions of lime and clay in these cements.

Table of Foreign Hydraulic Cements, showing the relative proportions of Clay and Lime contained in them.

LOCALITY.	Lime.	Clay.
English, (<i>commonly known as Parker's, or Roman cement</i>).....	55.40	44.60
French, (<i>made from Boulogne pebbles</i>).....	54.00	46.00
Do. (<i>Pouilly</i>).....	42.86	57.14
Do. do.	36.37	63.63
Do. (<i>Baye</i>)	21.62	78.38
Russian.....	62.00	38.00

The hydraulic cements used in England are obtained from various localities, and differ but little in the relative proportions of lime and clay found in them. Parker's cement, so called from the name of the person who first introduced it, is obtained by calcining nodules of *septaria*. The composition of these nodules is the same as that of the *Boulogne pebbles* found on the opposite coast of France. The stones which furnish the English and French hydraulic cements contain but a very small amount of magnesia.

45. A hydraulic cement known as natural *Portland cement* is manufactured in France, at Boulogne, where the stone, which is very soft, is found underlying the strata which furnish the Boulogne pebbles.

46. The best known hydraulic cements of the United States are manufactured in the State of New York. The following analyses of some of the hydraulic limestones, from the most noted localities, published in the *Geological Report of the State of New York*, 1839, are given by Dr. Beck.

Analysis of the Manlius Hydraulic Limestone.

Carbonic acid.....	39.80
Lime	26.24
Magnesia.....	18.80
Silica and alumina.....	13.50
Oxide of iron.....	1.25
Moisture and loss.....	1.41
	100.00

This stone belongs to the same bed which yields the hydraulic cement obtained near Kingston, in Upper Canada.

Analysis of the Chittenango Hydraulic Limestone, before and after calcination.

	Unburnt.		Burnt.
Carbonic acid.....	39.33	Carbonic acid and moisture..	10.90
Lime.....	25.00	Lime	39.50
Magnesia.....	17.83	Magnesia.....	22.27
Silica.....	11.76	Silica.....	16.56
Alumina.....	2.73	Alumina and oxide of iron..	10.77
Peroxide of iron.....	1.50		
Moisture.....	1.50		100.00
	100.00		

Analysis of the Hydraulic Limestone from Ulster Co., along the line of the Delaware and Hudson Canal, before and after burning.

	Unburnt.	Burnt.
Carbonic acid.....	34.20	5
Lime.....	25.50	37.60
Magnesia.....	12.35	16.65
Silica.....	15.37	22.75
Alumina.....	9.13	13.40
Oxide of Iron.....	2.25	3.30
Bituminous matter, moisture, and loss	1.20	1.30
	100.00	100.00

The hydraulic cement from this last locality has become generally well known, having been successfully used for most of the military and civil public works on the sea-board.

From the results of the analyses of all the above limestones, it appears that the proportions of lime and clay contained in them place them under the head of hydraulic cements, according to the classification of M. Petot. They do not slake, and they all set rapidly under water.

47. The discovery of the hydraulic properties of certain magnesian limestones is of recent date, and is due to M. Vicat, who first drew attention to the subject. M. Vicat inclines to the opinion that magnesia alone, without the presence of some clay, will yield only a feeble hydraulic lime. He states, that he has never been able to obtain any other, from proceeding synthetically with common lime and magnesia; and that he knows of no well-authenticated instance in which any of the dolomites, either of the primitive or transition formations, have yielded a good hydraulic lime. The stones from these formations, he states, are devoid of

clay; being very pure crystalline carbonates, or else contain siliceous matter only in the state of fine sand. From M. Vicat's experiments it is rendered certain that carbonate of magnesia in combination with carbonate of lime, in proportion of 40 parts of the latter to from 30 to 40 of the former, will produce a feebly hydraulic lime, which does not appear to increase in hardness after it has once set; but that, with the same proportions, some hundredths of clay are requisite to give hydraulic energy to the compound. This proportion of clay M. Vicat supposes may cause the formation of triple *hydrosilicates* of lime, alumina, and magnesia, having all the characteristic properties of good hydraulic lime.

48. The hydraulic properties of the magnesian limestones of the United States were noticed by Professor W. B. Rogers, who, in his *Report of the Geological Survey of Virginia*, 1838, has given the following analyses of some of the stones from different localities.

	No. 1.	No. 2.	No. 3.	No. 4.
Carbonate of lime.....	55.80	53.23	48.20	55.03
Carbonate of magnesia.....	39.20	41.00	35.76	24.16
Alumina and oxide of iron.....	1.50	0.80	1.20	2.60
Siliceous and insoluble matter.....	2.50	2.80	12.10	15.30
Water.....	0.40	0.40	2.73	1.20
Loss.....	0.60	1.77	0.01	1.71
	100.00	100.00	100.00	100.00

The limestone No. 1 of the above table is from Sheppards-town on the Potomac, in Virginia; it is extensively manufactured for hydraulic cement. No. 2 is from the Natural Bridge, and banks of Cedar Creek, Virginia; it makes a good hydraulic cement. No. 3 is from New York, and is extensively burnt for cement. No. 4 is from Louisville, Kentucky; said to make a good cement.

49. M. Vicat states, that a magnesian limestone of France, containing the following constituents, lime 40 parts, magnesia 21, and siliceous matter 21, yields a good hydraulic cement; and he gives the following analysis of a stone which gives a good hydraulic lime.

Carbonate of lime.....	50.60
Carbonate of magnesia.....	42.00
Siliceous.....	5.00
Alumina.....	2.00
Oxide of iron.....	0.40
	100.00

By comparing the constituents of these last two stones with the analyses of the cement-stones of New York, and the magnesian hydraulic limestones of Prof. Rogers, it will be seen that they consist, respectively, of nearly the same combinations of lime, magnesia, and silica.

Although not brought out in the analysis of the preceding stones, there is probably none in which the alkaline salts do not occur, and, in some, of sufficient amount to injure mortar made from them, by their efflorescence.

50. PHYSICAL CHARACTERS AND TESTS OF HYDRAULIC LIMESTONES. The simple external characters of a limestone, as color, texture, fracture, and taste, are insufficient to enable a person to decide whether it belongs to the hydraulic class; although they assist conjecture, particularly if the rock, from which the specimen is taken, is found in connection with the clay deposits, or if it belong to a stratum whose general level and characteristics are the same as the argillo-magnesian rocks. These rocks are generally some shade of drab, or of gray, or of a dark grayish-blue; have a compact texture; fracture even or conchoidal; with a clayey or earthy smell and taste. Although the hydraulic limestones are usually colored, still it may happen that the stone may be of a pure white, arising from the combination of lime with a pure clay. •

The difficulty of pronouncing upon the class to which a limestone belongs, from its physical properties alone, renders it necessary to resort to a chemical analysis, and even to direct experiment to decide the question.

51. A prejudice exists among lime manufacturers and builders in favor of the dark-colored products of calcined hydraulic limestones, but without any foundation, so far as experiment goes, as some of the most celebrated cements are light colored. As a general rule, a dark-colored material is an unfavorable sign, as showing the presence of some foreign ingredient.

52. In making a complete chemical analysis of a limestone, more skill in chemical manipulations is requisite than engineers usually possess; but a person who has the ordinary elementary knowledge of chemistry can readily ascertain the quantity of clay or of magnesia contained in a limestone, and from these two elements can pronounce, with tolerable certainty, upon its hydraulic properties. To arrive at this conclusion, a small portion of the stone to be tested—about five drachms—is taken and reduced to a powder; this is placed

in a capsule, or an ordinary watch crystal, and slightly diluted muriatic acid is poured over it until it ceases to effervesce. The capsule is then gently heated, and the liquor evaporated, until the residue in the capsule has acquired the consistence of thin paste. This paste is thrown into a pint of pure water and well shaken up, and the mixture is then filtered. The residue left on the filtering paper is thoroughly dried, by bringing it to a red heat; this being weighed will give the clay, or insoluble matter, contained in the stone. It is important to ascertain the state of mechanical division of the insoluble matter thus obtained; for if it be wholly granular, the stone will not yield hydraulic lime. The granular portion must therefore be carefully separated from the other before the latter is dried and weighed.

53. If the sample tested contains magnesia, an indication of this will be given by the slowness with which the acid acts; if the quantity of magnesia be but little, the solution will at first proceed rapidly and then become more sluggish. To ascertain the quantity of magnesia, clear lime-water must be added to the filtered solution as long as any precipitate is formed, and this precipitate must be quickly gathered on filtering paper, and then be washed with pure water. The residue from this washing is the magnesia. It must be thoroughly dried before being weighed, to ascertain its proportion to the clay.

54. Having ascertained, by the preceding analysis, the probable hydraulic energy of the stone, a sample of it should also be submitted to direct experiment. This may be likewise done on a small scale. A sample of the stone must be reduced to fragments about the size of a walnut. A crucible, perforated with holes for the free admission of air, is filled with these fragments, and placed over a fire sufficiently powerful to drive off the carbonic acid of the stone. The time for effecting this will depend on the intensity of the heat. When the heat has been applied for three or four hours, a small portion of the calcined stone may be tried with an acid, and the degree of the calcination may be judged of by the more or less copiousness of the effervescence that ensues. If no effervescence takes place, the operation may be considered completed. The calcined stone should be tried soon after it has become cold; otherwise, it should be kept in a glass jar made as air tight as practicable until used.

55. When the calcined stone is to be tried, it is first slaked by placing it in a small basket, which is immersed for five or six seconds in pure water. The stone is emptied from the

basket so soon as the water has drained off, and is allowed to stand until the slaking is terminated. This process will proceed more or less rapidly, according to the quality of the stone, and the degree of its calcination. In some cases, it will be completed in a few minutes; in others, portions only of the stone will fall to powder, the rest crumbling into lumps which slake very sluggishly; while other varieties, as the true cement stones, give no evidence of slaking. If the stone slakes either completely or partially, it must be converted into a paste of the consistence of soft putty, being ground up thoroughly, if necessary, in an iron mortar. The paste is made into a cake, and placed on the bottom of an ordinary tumbler, care being taken to make the diameter of the cake the same as that of the tumbler. The vessel is filled with water, and the time of immersion noted. If the lime is only moderately hydraulic, it will have become hard enough at the end of fifteen or twenty days, to resist the pressure of the finger, and will continue to harden slowly, more particularly from the sixth or eighth month after immersion; and at the end of a year it will have acquired the consistency of hard soap, and will dissolve slowly in pure water. A fair hydraulic lime will have hardened so as to resist the pressure of the finger, in about six or eight days after immersion, and will continue to grow harder until from six to twelve months after immersion; it will then have acquired the hardness of the softest calcareous stones, and will be no longer soluble in pure water. When the stone is eminently hydraulic, it will have become hard in from two to four days after immersion, and in one month it will be quite hard and insoluble in pure water; after six months, its hardness will be about equal to the more absorbent calcareous stones; and it will splinter from a blow, presenting a slaty fracture.

As the hydraulic cements do not slake perceptibly, the burnt stone must first be reduced to a fine powder before it is made into a paste. The paste, when kneaded between the fingers, becomes warm, and will generally set in a few minutes, either in the open air or in water. Hydraulic cements are far more sparingly soluble in pure water than the hydraulic lime; and the action of pure water upon them ceases, apparently, after a few weeks' immersion in it.

56. Calcination of Limestone. The effect of heat on lime-stones varies with the constituent elements of the stone. The pure limestones will stand a high degree of temperature without fusing, losing only their carbonic acid and water. The impure stones containing silica fuse completely under a great heat, and become more or less vitrified when the tem-

perature much exceeds a red heat. The action of heat on the impure limestones, besides driving off their carbonic acid and water, modifies the relations of their other chemical constituents. The argillaceous stones, for example, yield an insoluble precipitate when acted on by an acid before calcination, but are perfectly soluble afterwards, unless the silex they contain happens to be in the form of grains.

57. The calcination of the hydraulic limestones, from their fusible nature, requires to be conducted with great care; for, if not pushed far enough, the under-burnt portions will not slake; and, if carried too far, the stone becomes *dead* or sluggish; slakes very slowly and imperfectly at first; and, if used in this state for masonry, may do injury by the swelling which accompanies the after-slaking.

58. The more or less facility with which the impure limestones can be burned depends upon several causes; as the compactness of the stone, the size of the fragments submitted to heat, and the presence of a current of air, or of aqueous vapor. The more compact stones yield their carbonic acid less readily than those of an opposite texture. Stones which, when broken into very small lumps, can be calcined under the red heat of an ordinary fire in a few hours, will require a far greater degree of temperature, and for a much longer period, when broken into fragments of six or eight inches in diameter. This is particularly the case with the impure limestones, which, when in large lumps, vitrify at the surface before the interior is thoroughly burnt.

59. If a current of vapor is passed over the stone after it has commenced to give off its carbonic acid, the remaining portion of the gas which, under ordinary circumstances, is expelled with great difficulty, particularly near the end of the process of calcination, will be carried off much sooner. The influence of an aqueous current is attributed, by M. Gay-Lussac, purely to a mechanical action, by removing the gas as it is evolved, and his experiments go to show that a like effect is produced by an atmospheric current. In burning the impure limestones, however, an aqueous current produces the farther beneficial effect of preventing the vitrification of the stone when the temperature has become too elevated; but as the vapor, on coming in contact with the heated stone, carries off a large portion of the heat, this, together with the latent heat contained in it, may render its use in some cases far from economical.

60. Wood, charcoal, peat, the bituminous and the anthracite coals are used for fuel in lime-burning. M. Vicat states,

that wood is the best fuel for burning hydraulic limestones ; that charcoal is inferior to bituminous coal ; and that the results from this last are very uncertain. When wood is used, it should be dry and split up, to burn quickly and give a clear blaze. The common opinion among lime-burners, that the greener the fuel the better, and that the limestone should be watered before it is placed in the kiln, is wrong ; as a large portion of the heat is consumed in converting the water in both cases into vapor. Coal is a more economical fuel than wood, and is therefore generally preferred to it ; but it requires particular care in ascertaining the proper quantity for use.

III.

LIME KILNS.

LIME KILNS. Great diversity is met with in the forms and proportions of lime-kilns. Wherever attention has been paid to economy in fuel, the *cylindrical*, *ovoidal*, or the *inverted conical* form has been adopted. The two first being preferred for wood and the last for coal.

61. The whole of the burnt lime is either drawn from the kiln at once, or else the burning is so regulated, that fresh stone and fuel are added as the calcined portions are withdrawn. The latter method is usually followed when the fuel used is coal. The stone and coal, broken into proper sizes (Fig. 1), and in proportions determined by experiment, are




Fig. 1 represents a vertical section through the axis and centre lines of the entrances communicating with the interior of a kiln for burning lime with coal.

- A, solid masonry of the kiln, which is built up on the exterior like a square tower, with two arched entrances at B, B on opposite sides.
- C, interior of the kiln, lined with fire-brick or stone.
- D, ash-pit.
- c, c, openings between B, B and the interior through which the burnt lime is drawn.

placed in the kiln in alternate layers ; the coal is ignited at the bottom of the kiln, and fresh strata are added at the top, as the burnt mass settles down and is partially withdrawn at the

bottom. Kilns used in this way are called *perpetual kilns*; they are more economical in the consumption of fuel than those in which the burning is intermitted, and which are, on this account, termed *intermittent kilns*. Wood may also be used as fuel in perpetual kilns; but not with such economy as coal; it moreover presents many inconveniences, in supplying the kiln with fresh stone, and in regulating its discharge. The inverted conical-shaped kiln is generally adopted for coal, and the ovoidal-shaped for wood.

62. Some care is requisite in filling the the kiln with stone when a wood fire is used. A dome (Fig. 2) is formed of the




Fig. 2 represents a vertical section through the axis and centre line of the entrance of a lime-kiln for wood.
 A, solid masonry of the kiln.
 B, arched entrance.
 C, doorway for drawing kiln and supplying fuel.
 D, interior of kiln.
 E, dome of broken stone, shown by the dotted line.

largest blocks of the broken stone, which either rests on the bottom of the kiln or on the ash-grate. The lower diameter of the dome is a few feet less than that of the kiln; and its interior is made sufficiently capacious to receive the fuel which, cut into short lengths, is placed up endwise around the dome. The stone is placed over and around the courses which form the dome, the largest blocks in the centre of the kiln. The management of the fire is a matter of experiment. For the first eight or ten hours it should be carefully regulated, in order to bring the stone gradually to a red heat. By applying a high heat at first, or by any sudden increase of it until the mass has reached a nearly uniform temperature, the stone is apt to shiver, and choke the kiln, by stopping the voids between the courses of stone which form the dome. After the stone is brought to a red heat, the supply of fuel should be uniform until the end of the calcination. The practice sometimes adopted, of abating the fire towards the end, is bad, as the last portions of carbonic acid retained by the stone, require a high degree of heat for their expulsion. The indications of complete calcination are generally manifested by the diminution which gradually takes place in the mass, and which, at this stage, is about one sixth of the primitive volume; by the broken appearance of the stone which forms the dome, the

interstices between which being also choked up by fragments of the burnt stone; and by the ease with which an iron bar may be forced down through the burnt stone in the kiln. When these indications of complete calcination are observed, the kiln should be closed for ten or twelve hours, to confine the heat and finish the burning of the upper strata.

63. The form and relative dimensions of a kiln for wood can be determined only by careful experiment. If too great height be given to the mass, the lower portions may be overburned before the upper are burned enough. The proportions between the height and mean horizontal section, will depend upon the texture of the stone; the size of the fragments into which it is broken for burning; and the more or less facility with which it vitrifies. In the memoir of M. Petot, already cited, it is stated as the result of experiments made at Brest, that large-sized kilns are more economical, both in the consumption of fuel and in the cost of attendance, than small ones; but that there is no notable economy in fuel when the mean horizontal section of the kiln exceeds sixty square feet.

64. The circular seems the most suitable form for the horizontal sections of a kiln, both for strength and economizing the heat. Were the section the same throughout, or the form of the interior of the kiln cylindrical, the strata of stone, above a certain point, would be very imperfectly burned when the lower were enough so, owing to the rapidity with which the inflamed gases, arising from the combustion, are cooled by coming into contact with the stone. To procure, therefore, a temperature throughout the heated mass which shall be nearly uniform, the horizontal sections of the kiln should gradually decrease from the point where the flame rises, which is near the top of the dome of broken stone, to the top of the kiln. This contraction of the horizontal section, from the bottom upward, should not be made too rapidly, as the draft would be injured, and the capacity of the kiln too much diminished; and in no case should the area of the top opening be less than about one fourth the area of the section taken near the top of the dome. The best manner of arranging the sides of the kiln, in the plane of the longitudinal section, is to connect the top opening with the horizontal section through the top of the dome, by an arc of a circle whose tangent at the lower point shall be vertical.

65. Lime-kilns are constructed either of brick or of some of the more refractory stones. The walls of the kiln should be sufficiently thick to confine the heat, and, when the locality

admits of it they are built into a side hill; otherwise, it may be necessary to use iron hoops, and vertical bars of iron, to strengthen the brick-work. The interior of the kiln should be faced either with good fire-brick or with fire-stone.

66. M. Petot prefers kilns arranged with fire-grates, and an ash-pit under the dome of broken stone, for the reason that they give the means of better regulating the heat, and of throwing the flame more in the axis of the kiln than can be done in kilns without them. The action of the flame is thus more uniformly felt through the mass of stone above the top of the dome, while that of the radiated heat upon the stone around the dome is also more uniform.

67. M. Petot states, that the height of the mass of stone above the top of the dome should not be greater than from ten to thirteen feet, depending on the more or less compact texture of the stone, and the more or less ease with which it vitrifies. He proposes to use kilns with two stories (Fig. 3),

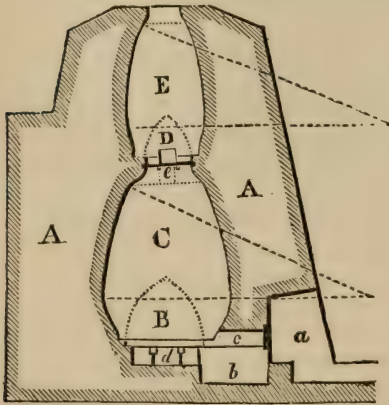


Fig. 3 represents a vertical section through the axis and centre line of the entrance of a lime-kiln with two stories for wood.

- A, solid masonry of the kiln.
- B, dome shown by the dotted line.
- C, interior of lower story.
- D, dome of upper story.
- E, interior of upper story.
- a, arched entrance to kiln.
- b, receptacle for water to furnish a current of aqueous vapor.
- c, doorway for drawing kiln, etc., closed by a fire-proof door.
- d, ash-pit under fire-grate.
- e, upper doorway for drawing kiln, etc.

for the purpose of economizing the fuel, by using the heat which passes off from the top of the lower story, and would otherwise be lost, to heat the stone in the upper story; this story being arranged with a side-door, to introduce fuel under its dome of broken stone, and complete the calcination when that of the stone in the lower story is finished.

M. Petot gives the following general directions for regulating the relative dimensions of the parts of the kiln. The greatest horizontal section of the kiln is placed rather below the top of broken stone; the diameter of this section being 1.82, the diameter of the grate. The height of the dome

above the grate is from 3 to 6 feet, according to the quantity of fuel to be consumed hourly. The bottom of the kiln, on which the piers of the dome rest, is from 4 to 6 inches above the top of the grate; the diameter of the kiln at this point being about 2 feet 9 inches greater than that of the grate. The diameter of the horizontal section at top is 0.63 the diameter of the greatest horizontal section. The horizontal sections of the kiln diminish from the section near the top of the dome to the top and bottom of the kiln; the sides of the kiln receiving the form shown in Fig. 3: the object of contracting the kiln towards the bottom being to allow the stone near the bottom to be thoroughly burned by the radiated heat. The grate is formed of cast-iron bars of the usual form, the area of the spaces between the bars being one fourth the total area of the grate. The bottom of the ash-pit, which may be on the same level as the exterior ground, is placed 18 inches below the grate; and at the entrance of the ash-pit is placed a reservoir for water, about 18 inches in depth, to furnish an aqueous current. The draft through the grate is regulated by a lateral air channel to the ash-pit, which can be totally or partially shut by a valve; the area of the cross section of this channel is one tenth the total area of the grate. A square opening, 16 inches wide, the bottom of which is on a level with the bottom of kiln, leads to the dome for the supply of the fuel. This opening is closed with a fire-proof and air-tight door.

In arranging a kiln with two stories, M. Petot states, that the grates of the upper story are so soon destroyed by the heat, that it is better to suppress them, and to place the fuel for completing the calcination of the stone of this story on the top of the burnt stone of the lower story.

68. Lime burning has become a special branch of industry in the United States, in which a large amount of capital is embarked, so that the engineer has now no other concern in the manufacture of this material than to be able to test and select from the samples offered him to suit the application he intends making of his material.

69. There are two principal classes of lime-kilns employed by the manufacturers of lime in the United States. These vary but little from each other in form and dimensions in the localities in which they are used throughout the country.

70. The first class belongs to the *perpetual kilns*, the stone and fuel, which is usually bituminous or anthracite coal, being placed in the kiln in alternate layers, in proportions pointed out by experience, which is fed in like manner at the

top as the calcined stone is gradually drawn out at the bottom. In some cases the chamber of these kilns is simply an inverted frustum of a cone in form.

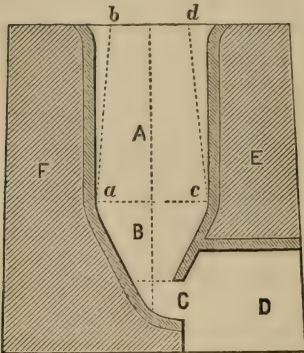


Fig. 4 represents a section through the axis of the perpetual lime-kilns in ordinary use in the United States for coal as the fuel.
 A, body of the kiln.
 B, thimble, or lower frustum.
 C, D, draw pit.
 F, body of the masonry.
a b, c d, sides of conical-shaped kiln.

71. In others (Fig. 4) the body or upper portion of the chamber is cylindrical, whilst the lower portion is an inverted conical frustum, the two surfaces being united by an annular one tangent to each.

72. The second class is the flume or furnace kiln. In this the stone placed in the chamber of the kiln is calcined by the combustion of the fuel, either wood or coal, placed in furnaces near the bottom of the chamber. This class may be used either as intermittent or perpetual kilns.

73. In both classes the stone for burning is broken into lumps, none of which should be over eight inches in size in any direction. In the selection of the lumps great care and experience are required on the part of the kiln attendants, in order to obtain a product of uniform quality, as admixtures of stones varying in any important degree in their constituent elements, particularly in those of hydraulic limestones, may so vitiate the results as to render them useless for hydraulic structures.

74. In others they are formed of the frusta of two conical surfaces, as shown by the dotted lines *a b, c d*, united at their larger bases (Fig. 4).

The diameter *a c* of the thimble varies from eight to ten feet; the diameter at the bottom from eighteen inches to three feet; the height of the thimble from seven to ten feet. The upper diameter of the body of the kiln, if conical, is about a

Fig. 7.

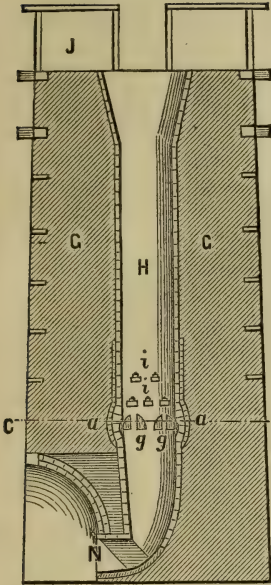


Fig. 6.

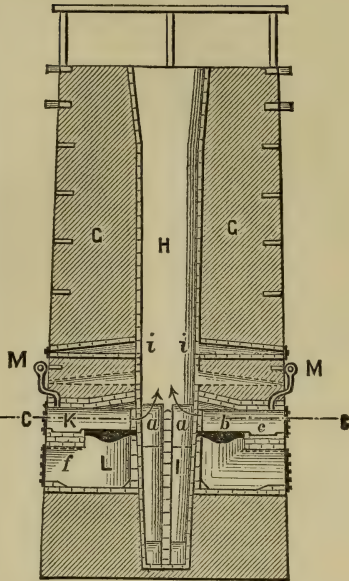


Fig. 5.

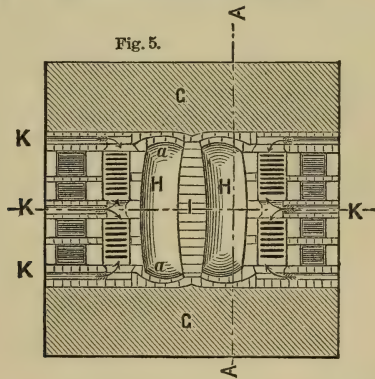


Fig. 5 is a horizontal section taken at CC, Figs. 6, 7; Fig. 6 is a vertical section taken at KK, Fig. 5, through the main furnace; and Fig. 7 a vertical section through A A of the water flame kiln for coal.

- H, H is the cupola or body of the kiln.
- I, wall dividing the cupola, and rising from bottom of kiln to a level with the side-flues.
- J, wooden crib on top.
- K, furnace arches.
- L, ash pit.
- M, water-pipes for supplying water-pans c and ash pans f.
- N, curved iron lining at bottom serving as a slide.
- a, a, concaves in interior of cupola.
- b, b, grates.
- c, c, hot-water coal-pans.
- i, i, sight-holes for examining burning of body of lime and punching it downwards.
- g, g, side flues.

foot less than the lower ; if cylindrical, the same as the lower. The height of the body from twelve to twenty feet. The draw door from eighteen inches to three feet. The height of the draw pit nine feet.

The body A of the masonry is sometimes rectangular and sometimes circular in plan, and about six feet in thickness. It is secured on the outside either by strips of wood let into the masonry, or by iron curbs. The lining of the kiln is of the best fire-brick.

The kiln, for burning, is filled with alternate layers of coal and stone, those of the latter not exceeding six inches in thickness. The fire is started from beneath, with dry wood. The drawing of the kiln is done two or three times every twenty-four hours.

75. The perpetual draw *water-flame* kilns, for both coal and wood, patented by Mr. C. D. Page, of Rochester, New York, have met with very general favor in our large lime burning localities.

The cupola which contains the burning lime, it will be seen, is chiefly cylindrical, being terminated at top and bottom by conical frusta.

The cupola space is six by eight feet between the main walls AA. The main walls from out to out are eighteen by twenty feet at the base of the kiln ; fifteen by sixteen feet at the top ; and forty feet high. The main walls are strengthened as usual with timber curbs. The wooden crib at top, which is strongly boarded to the height of four feet, serves as a reservoir for the raw stone.

This kiln receives its name from the coal being first placed in pans of hot water, the steam from which being decomposed facilitates the process of burning by the decomposition of the steam.

76. **Hoffman Kiln.** General Q. A. Gillmore, of the United States Corps of Engineers, to whom the profession is already so much indebted for his researches on the limes and cements in the United States, has given in his recent pamphlet, No. 19, *Professional Papers, Corps of Engineers, U. S. Army*, an account of what is known as the Hoffman Kiln, of which the following is a brief description :—

This kiln (Figs. 8, 9, 10, 11) consists of an annular arch, A, A', the plan of which may be a circle, an oval, or as in Fig. 8. The height of the arch being from eight to nine feet, and span from ten to twelve feet ; the middle line of the chamber A measuring one hundred and fifty feet. This void space is termed the *burning chamber*.

The chimney C, C' (Figs. 10, 11) may stand in the central space B, B', or exterior to the kiln. In the latter case a smoke flue leads to it under the burning chamber. Fourteen radial flues lead from the burning chambers to the smoke chamber, and

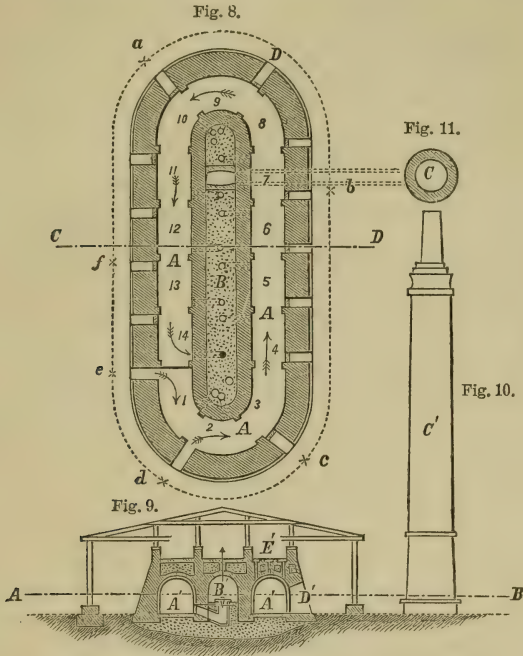


Fig. 8. Horizontal section of kiln on A B, Fig. 9.

Fig. 9. Vertical section on C D, Fig. 8.

Fig. 10. Elevation of chimney.

Fig. 11. Section of chimney at A B, Fig. 10.

A, A', Burning chamber.

B, B', Smoke chamber.

C, C', Chimney.

D, Doorways.

a, b, Lime-stone in process of burning.

b, c, do. do. of cooling.

c, d, do. do. of drawing.

d, e, do. do. of setting up.

e, f, do. do. of drying.

f, a, do. do. of taking up waste heat.

each having a bell-shaped damper, which can be opened or closed at pleasure. There are fourteen arched doors, D, D, through the outer wall, each five feet high, and four feet wide.

The arched top of the burning chamber is pierced, at intervals of three or four feet, with holes, five inches in diameter, termed feed-holes, through which fuel is supplied to the fires.

They are in number about three hundred, each closed with a bell-shaped cover fitting over a rim or curb, and dipping into sand.

The entire structure is of solid stone or brick masonry, and covered with a roof.

The burning chamber is lined with fire-brick for burning hydraulic cement.

77. Calcination of the stone.—When the kiln is in operation all the doorways (Fig. 8) numbered from 1 to 14, from left to right are kept closed *with temporary brickwork*, except two or three. Let the open ones be 1 and 2. The burnt lime is drawn from No. 2, and raw stone taken in at No. 1 and piled up in the burning chamber, leaving vertical openings under the feed holes, and horizontal ones under the mass for the circulation of air around the periphery of the burning chamber.

When the kiln is going, all the compartments but two, between each two consecutive doorways, are filled with stone, in all stages, from the raw to thoroughly calcined.

“Suppose compartments 1 and 2 empty, and all the others filled. No. 3 contains cement from stone put in 12 days ago; No. 4 that from stone put in 11 days ago; and so on around to compartment 14, which was filled yesterday. Separating No. 14 from No. 1 is a sheet iron partition, as nearly as possible air-tight. This partition, called the *cut-off*, is movable. Yesterday it was between 13 and 14; to-morrow it will be between 1 and 2, and so on, being moved on one compartment each day. All the dampers are closed to-day except No. 14; yesterday all were closed except No. 13; to-morrow only No. 1 will be open. To-day men are removing burnt cement from compartment No. 2, and others are setting raw stone in compartment No. 1. Yesterday they were setting stone in No. 14, and removing cement from No. 1. To-morrow they will be removing cement from No. 3, and filling No. 2 with raw stone; so that every day the setting, drawing, cut-off, and open damper advance one compartment. The fires are in the centre of the mass, from the burnt cement end round to the raw stone end; say in compartments 7 and 8 to-day, 6 and 7 yesterday, 8 and 9 to-morrow, advancing one compartment per day, like the drawing and setting.

“The compartment that was in fire yesterday, say No. 6, is still very hot to-day, No. 5 less hot, No. 4 cooler, and so on to No. 2, where the cement is cool enough to be handled, and men are removing it from the kiln, wheelbarrows, or trucks on portable railway tracks, being used for the purpose.

“The compartments not yet fired are heated by the hot gases passing through them to the chimney, the stone in the compartment next the fire being at a full red heat, while that farthest off, which was put in yesterday, is only warm.

“The draught of the chimney is sufficient to draw air in at the open doorways, through the entire mass of cement and raw stone, to the open flue, which is the one by the cut-off.

“In passing through the burnt cement the air takes up the residue of heat and becomes hotter and hotter, till, after passing through the cement burned yesterday, the hot current ignites at once the dust coal as it falls from the feed pipes, and the gases thus formed being carried on, mixed with air, it is probable the stone is burned considerably in advance of where the coal is supplied.

“As the hot gases of combustion pass on, they give up their heat to the limestone, till, on arriving at the chimney, there is only heat enough remaining to cause a draught in a well-constructed chimney 140 to 150 feet in height. It is plain that *all* the heat of combustion is utilized, except such as may escape through the walls of the kiln, and as the masonry is very massive, the loss from this cause is very slight.

“One peculiar feature of these kilns is, that although less likely to get out of order than other kilns, from the fact that there is no movement in the burning mass, repairs may be easily made without letting the fire go down.

“There are Hoffman kilns in which the fires have not been extinguished for five years.”

78. Methods of reducing the calcined stone to powder.—The calcined stone may be reduced to powder, either by a chemical or mechanical process. By the first, water combines with the lime, forming a hydrate of lime, which process is termed slaking. By the second the calcined stone is first broken into small lumps; these are then ground in a mill to the requisite degree of fineness, ascertained by the sieves through which the ground product must pass.

79. Slaking.—This may be done in three ways:

By pouring sufficient water on the burnt stone to convert the slaked lime into a thin paste, which is termed *drowning* the lime.

By placing the burnt stone in a basket, and immersing it for a few seconds in water, during which time it will imbibe enough water to cause it to fall, by slaking, into a dry powder; or by sprinkling the burnt stone with a sufficient quantity of water to produce the same effect.

By allowing the stone to slake spontaneously, from the

moisture it imbibes from the atmosphere, which is termed *air-slaking*.

80. Opinion seems to be settled among engineers, that drowning is the worst method of slaking lime which is to be used for mortars. When properly done, however, it produces a finer paste than either of the other methods; and it may therefore be resorted to whenever a paste of this character, or a whitewash is wanted. Some care, however, is requisite to produce this result. The stone should be fresh from the kiln, otherwise it is apt to slake into lumps or fine grit. All the water used should be poured over the stone at once, which should be arranged in a basin or vessel, so that the water surrounding it may be gradually imbibed as the slaking proceeds. If fresh water be added during the slaking, it checks the process, and causes a gritty paste to form.

81. In slaking by immersion, or by sprinkling with water, the stone should be reduced to small-sized fragments, otherwise the slaking will not proceed uniformly. The fat lumps should be in lumps, about the size of a walnut, for immersion; and, when withdrawn from the water, should be placed immediately in bins, or be covered with sand, to confine the heat and vapour. If left exposed to the air, the lime becomes chilled and separates into a coarse grit, which takes some time to slake thoroughly when more water is added. Sprinkling the lime is a more convenient process than immersion, and is equally good. To effect the slaking in this way, the stone should be broken into fragments of a suitable size, which experiment will determine, and be placed in small heaps, surrounded by sufficient sand to cover them up when the slaking is nearly completed. The stone is then sprinkled with about one fourth its bulk of water, poured through the rose of a watering-pot, those lumps which seem to slake most sluggishly receiving the most water; when the process seems completed, the heap is carefully covered over with the sand, and allowed to remain a day or two before it is used.

82. Slaking either by immersion or by sprinkling is considered the best. The quantity of water imbibed by lime when slaked by immersion, varies with the nature of the lime; 100 parts of fat lime will take up only 18 parts of water; and the same quantity of meager lime will imbibe from 20 to 35 parts. One volume, in powder, of the burnt stone of rich lime yields from 1.50 to 1.70 in volume of powder of slaked lime; while one volume of meager lime, under like circumstances, will yield from 1.80 to 2.18 in volume of slaked lime.

83. Quick lime, when exposed to the free action of the air

in a dry locality, slakes slowly, by imbibing moisture from the atmosphere, with a slight disengagement of heat. Opinion seems to be divided with regard to the effect of this method of slaking on fat limes. Some assert, that the mortar made from them is better than that obtained from any other process, and attribute this result to the re-conversion of a portion of the slaked lime into a carbonate; others state the reverse to obtain, and assign the same cause for it. With regard to hydraulic limes, all agree that they are greatly injured by air-slaking.

84. When the slaking is imperfect and is owing as in most cases to the stone having been unequally burned, the lime should be reduced to a paste in a mortar mill that will grind fine all the lumps. This is particularly necessary in hydraulic limes, which are also improved in energy by this reduction of the underburned lumps.

85. Air-slaked fat limes increase two-fifths in weight, and for one volume of quick lime yield 3.52 volumes of slaked lime. The meager limes increase one-eighth in weight, and for one volume of quick lime yield from 1.75 to 2.25 volumes of slaked lime.

86. The dry hydrates of lime, when exposed to the atmosphere, gradually absorb carbonic acid and water. This process proceeds very slowly, and the slaked lime never regains all the carbonic acid which is driven off by the calcination of the lime-stone. When converted into a thick paste, and exposed to the air, the hydrates gradually absorb carbonic acid; this action first takes place on the surface, and proceeds more slowly from year to year towards the interior of the exposed mass. The absorption of gas proceeds more rapidly in the meager than in the fat limes. Those hydrates which are most thoroughly slaked become hardest. The hydrates of the pure fat limes become in time very hard, while those of the hydraulic limes become only moderately hard.

87. The fat limes, when slaked by drowning, may be preserved for a long period in the state of paste, if placed in a damp situation and kept from contact with the air. They may also be preserved for a long time without change, when slaked by immersion to a dry powder, if placed in covered vessels. Hydraulic limes, under similar circumstances, will harden if kept in the state of paste, and will deteriorate when in powder, unless kept in perfectly air-tight vessels.

88. The hydrates of fat lime, from air-slaking or immersion, require a smaller quantity of water to reduce them to the state of paste than the others; but, when immersed in water, they

gradually imbibe their full dose of water, the paste becoming thicker, but remaining unchanged in volume. Exposed in this way, the water will in time dissolve out all the lime of the hydrate which has not been reconverted into a sub-carbonate, by the absorption of carbonic acid before immersion; and if the water contain carbonic acid, it will also dissolve the carbonated portions.

89. The hydrates of hydraulic lime, when immersed in water in the state of thin pastes, reject a portion of the water from the paste, and become hard in time; if the paste be very stiff, they imbibe more water, set quickly, and acquire greater hardness in time than the soft pastes. The pastes of the hydrates of hydraulic lime, which have hardened in the air, will retain their hardness when placed in water.

90. All limes seem to have their hydraulic energy affected by the degree of their calcination; but only in their first stages of immersion. This is observed even in underburned common lime which, when suitably reduced, is found to be slightly hydraulic.

91. The pastes of the fat limes shrink very unequally in drying, and the shrinkage increases with the purity of the lime; on this account it is difficult to apply them alone to any building purposes, except in very thin layers. The pastes of the hydraulic limes can only be used with advantage under water, or where they are constantly exposed to humidity; and in these situations they are never used alone, as they are found to succeed as well, and to present more economy, when mixed with a portion of sand.

92. **Manner of reducing hydraulic cement.**—As the cement stones will not slake, they must be reduced to a fine powder by some mechanical process, before they can be converted into a hydrate. The methods usually employed for this purpose consist in first breaking the burnt stone into small fragments, either under iron cylinders, or in conical-shaped mills suitably formed for this purpose. The product is next ground between a pair of stones, or else crushed by an iron roller. The coarser particles are separated from the fine powder by the ordinary processes with sieves. The powder is then carefully packed in air-tight casks, and kept for use.

93. Hydraulic cement, like hydraulic lime, deteriorates by exposure to the air, and may in time lose all its hydraulic properties. On this account it should be used when fresh from the kiln; for, however carefully packed, it cannot be well preserved when transported to any distance.

94. The deterioration of hydraulic cements, from exposure

to the air, arises, probably, from a chemical disunion between the constituent elements of the burnt stone, occasioned by the absorption of water and carbonic acid. When injured, their energy can be restored by submitting them to a much slighter degree of heat than that which is requisite to calcine the stone suitably in the first instance. From the experiments of M. Petot, it appears that a red heat, kept up for a short period, is sufficient to restore damaged hydraulic cements.

95. "As a rule, all hydraulic cements produced at a low heat, whether derived from argillaceous or argillo-magnesian lime-stones, are light in weight and quick-setting, and never attain, when made into mortar or béton, more than 30 to 33 per cent. of the strength and hardness of Portland cement placed in similar circumstances. They are also greatly inferior to good hydraulic lime. This is true of all cements made at a low heat, including even those derived from lime-stones, that might, with proper burning, have yielded Portland cement. The celebrated Roman cement, the twice-kilned artificial cements, the quick-setting French cement, like that of Vassy, and all the hydraulic cements manufactured at the present day in the United States, belong to this category."

96. ARTIFICIAL HYDRAULIC LIMES AND CEMENTS: The discovery of the argillaceous character of the stones which yield hydraulic limes and cements, connected with the fact that brick reduced to a fine powder, as well as several substances of volcanic origin having nearly the same constituent elements as ordinary brick, when mixed in suitable proportions with common lime, will yield a paste that hardens under water, has led, within a recent period, to artificial methods of producing compounds possessing the properties of natural hydraulic limestones.

97. M. Vicat was the first to point out the method of forming an artificial hydraulic lime, by mixing common lime and unburnt clay, in suitable proportions, and then calcining them. The experiments of M. Vicat have been repeated by several eminent engineers with complete success, and among others by General Pasley, who, in a recent work by him, *Observations on Limes, Calcareous Cements, etc.*, has given, with minute detail, the results of his experiments; from which it appears that an hydraulic cement, fully equal in quality to that obtained from natural stones, can be made by mixing common lime, either in the state of a carbonate or of a hydrate, with clay, and subjecting the mixture to a suitable de-

gree of heat. In some parts of France, where chalk is found abundantly, the preparation of artificial hydraulic lime has become a branch of manufacture.

98. Different methods have been pursued in preparing this material, the main object being to secure the finest mechanical division of the two ingredients, and their thorough mixture. For this purpose the lime-stone, if soft, like chalk or tufa, may be reduced in a wash-mill, or a rolling-mill, to the state of a soft pulp; it is then incorporated with the clay, by passing them through a pug-mill. The mixture is next moulded into small blocks, or made up into balls between 2 and 3 inches diameter, by hand, and well dried. The balls are placed in a kiln,—suitably calcined, and are finally slaked, or ground down fine for use.

99. If the lime-stone be hard, it must be calcined and slaked in the usual manner, before it can be mixed with the clay. The process for mixing the ingredients, their calcination, and further preparation for use, are the same as in the preceding case.

100. The artificial hydraulic cement manufactured in France, at Boulogne, and possessing the same qualities as the artificial Portland cement, is composed of 79.5 per cent. of carbonate of lime in powder, and 20.5 of clay, which, after being thoroughly mixed, are subjected to a very high degree of temperature.

101. What is known, in commerce and among engineers, as artificial Portland cement, is a mixture of the blue clay of the London basin and chalk, formed by grinding the materials together in water. The semi-fluid mixture is run off into vats, and, after settling and attaining sufficient consistency, is dried by artificial heat and then calcined, at a high temperature, to the verge of vitrification. It is then reduced for use to a very fine powder. It is said not to deteriorate from exposure to the air, provided it be kept from moisture.

102. Artificial hydraulic lime, prepared from the hard limestones, is more expensive than that made from the soft; but it is stated to be superior in quality to the latter.

103. As clays are seldom free from carbonate of lime, and as the limestones which yield common or fat lime may contain some portion of clay, the proper proportions of the two ingredients, to produce either an hydraulic lime or a cement, must be determined by experiment in each case, guided by a previous analysis of the two ingredients to be tried.

If the lime be pure, and the clay be free from lime, then the combinations in the proportions given in the table of M.

Petot will give, by calcination, like results with the same proportions when found naturally combined.

104. Puzzolana, etc. The practice of using brick or tile-dust, or a volcanic substance known by the name of puzzolana, mixed with common lime, to form an hydraulic lime, was known to the Romans, by whom mortars composed of these materials were extensively used in their hydraulic constructions. This practice has been more or less followed by modern engineers, who, until within a few years, either used the puzzolana of Italy, where it is obtained near Mount Vesuvius, in a pulverulent state, or a material termed *Trass*, manufactured in Holland, by grinding to a fine powder a volcanic stone obtained near Andernach, on the Rhine.

Experiments by several eminent chemists have extended the list of natural substances which, when properly burnt and reduced to powder, have the same properties as puzzolana. They mostly belong to the feldspathic and schistose rocks, and are either fine sand, or clays more or less indurated.

The following Table gives the results of analyses of Puzzolana, Trass, a Basalt, and a Schistus, which, when burnt and powdered, were found to possess the properties of puzzolana.

	Puzzolana.	Trass.	Basalt.	Schistus.
Silica.....	0.445	0.570	44.50	46.00
Alumina	0.150	0.120	16.75	26.00
Lime	0.088	0.026	9.50	4.00
Magnesia.....	0.047	0.010	—	—
Oxide of iron.....	0.120	0.050	20.00	14.00
Oxide of manganese.....	—	—	2.37	8.00
Potassa.....	0.014	0.070	—	—
Soda.....	0.030	0.010	2.60	—
Water and loss.....	0.106	0.144	4.28	2.00
	1.000	1.000	100.00	100.00

105. Whether natural puzzolanas occur in the United States, is not known. The great abundance of natural hydraulic cements would probably cause no demand for them, nor for artificial puzzolanas for building purposes.

106. All of these substances, when prepared artificially, are now generally known by the name of *artificial puzzolanas*, in contradistinction to those which occur naturally.

107. General Treussart, of the French Corps of Military Engineers, first attempted a systematic investigation of the

properties of artificial puzzolanas made from ordinary clay, and of the best manner of preparing them on a large scale. It appears from the results of his experiments, that the plastic clays used for tiles, or pottery, which are unctuous to the touch, the alumina in them being in the proportion of one fifth to one third of the silica, furnish the best artificial puzzolanas when suitably burned. The clays which are more meager, and harsher to the touch, yield an inferior article, but are in some cases preferable, from the greater ease with which they can be reduced to a powder.

108. As the clays mostly contain lime, magnesia, some of the metallic oxides, and alkaline salts, General Treussart endeavored to ascertain the influence of these substances upon the qualities of the artificial puzzolanas from clays in which they are found. He states, that the carbonate of potash and the muriate of soda seem to act beneficially; that magnesia seems to be passive, as well as the oxide of iron, except when the latter is found in a large proportion, when it acts hurtfully; and that the lime has a material influence on the degree of heat required to convert the clay into a good artificial puzzolana.

109. The management of the heat, in the preparation of this material, seems of the first consequence; and General Treussart recommends that direct experiment be resorted to, as the most certain means of ascertaining the proper point. For this purpose, specimens of the clay to be tried may be kneaded into balls as large as an egg, and the balls when dry, be submitted to different degrees of heat in a kiln, or furnace, through which a current of air must pass over the balls, as this last circumstance is essential to secure a material possessing the best hydraulic qualities. Some of the balls are withdrawn as soon as their color indicates that they are underburnt; others when they have the appearance of well-burnt brick; and others when their color shows that they are overburnt, but before they become vitrified. The burnt balls are reduced to an impalpable powder, and this is mixed with a hydrate of fat lime, in the proportion of two parts of the powder to one of lime in paste. Water is added, if necessary, to bring the different mixtures to the consistence of a thick pulp; and they are separately placed in glass vessels, covered with water, and allowed to remain until they harden. The compound which hardens most promptly will indicate the most suitable degree of heat to be applied.

110. As the carbonates of lime, of potash, and of soda, act as fluxes on silica, the presence of either one of them will

modify the degree of heat necessary to convert the clay into a good natural puzzolana. Clay, containing about one tenth of lime, should be brought to about the state of slightly-burnt brick. The ochreous clays require a higher degree of heat to convert them into a good material, and should be burnt until they assume the appearance of well-burnt brick. The more refractory clays will bear a still higher degree of heat; but the calcination should in no case be carried to the point of incipient vitrification.

111. The quantity of lime contained in the clay can be readily ascertained beforehand, by treating a small portion of the clay, diffused in water, with enough muriatic acid to dissolve out the lime; and this last might serve as a guide in the preliminary stages of the experiments.

112. General Treussart states, as the results of his experiments, that the mixture of artificial puzzolana and fat lime forms an hydraulic paste superior in quality to that obtained by M. Vicat's process for making artificial hydraulic lime. M. Curtois, a French civil engineer, in a memoir on these artificial compounds, published in the *Annales des Ponts et Chaussées*, 1834, and General Pasley, more recently, adopt the conclusion of General Treussart. M. Vicat's process appears best adapted when chalk, or any very soft lime-stone, which can be readily converted to a soft pulp, is used, as offering more economy, and affording an hydraulic lime which is sufficiently strong for most building purposes. By it General Pasley has succeeded in obtaining an artificial hydraulic cement which is but little, if at all, inferior to the best natural varieties; a result which has not been obtained from any combination of fat lime with puzzolana, whether natural or artificial.

113. All the puzzolanas possess the important property of not deteriorating by exposure to the air, which is not the case with any of the hydraulic limes or cements. This property may render them very serviceable in many localities, where only common or feebly hydraulic lime can be obtained.

114. The well-known artificial Portland cement, manufactured in England, is composed of an intimate mixture of chalk and clay, in the state of paste, which is then dried and burned in kilns or ovens; the product of the calcination being flinty, or like vitrified brick. This degree of calcination is essential to the excellence of the material, of which its weight, or specific gravity, is one of the best tests.

Another more recent method of giving a certain degree of hydraulicity to common limes, and of improving that of hy-

draulic limes, is to place the calcined stone, after it has been drawn from the kiln, in arched ovens which can be made airtight, in which it can be subjected to the action of a fire, from a grate beneath; so that the heat can be equally diffused throughout the mass, which is brought only to a slight glow, as seen by the eye. When in this condition, iron pots containing sulphur are placed underneath, and the sulphur, converted into vapour, allowed to permeate the mass of lime; the escape of the vapour from the oven having been previously provided against. After the sulphur has been consumed the mass is allowed to cool, and is then ground fine like other cements. This product is known in commerce as *Scott's cement*, from the name of the inventor, an officer of the Royal Engineers. See *Professional Papers of the Corps of Royal Engineers*. Vol. X. New Series.

IV.

MORTAR.

115. *Mortar* is any mixture of lime in paste with sand. It may be divided into two principal classes; *Hydraulic mortar*, which is made of hydraulic lime, and *Common mortar*, made of common lime.

116. The term *Grout* is applied to any mortar in a thin or fluid state; and the terms *Concrete* and *Beton*, to mortars incorporated with gravel and small fragments of stone or brick.

117. Mortar is used for various purposes in building. It serves as a cement to unite blocks of stone, or brick. In concrete and beton, which may be regarded as *artificial conglomerate stones*, it forms the *matrix* by which the gravel and broken stone are held together; and it is the principal material with which the exterior surfaces of walls and the interior of edifices are coated.

118. The quality of mortars, whether used for structures exposed to the weather, or for those immersed in water, will depend upon the nature of the materials used; their proportions; the manner in which the lime has been converted into a paste to receive the sand; and the mode employed to mix the ingredients. Upon all of these points experiment

is the only unerring guide for the engineer; for the great diversity in the constituent elements of limestones, as well as in the other ingredients of mortars, must necessarily alone give rise to diversities in results; and when, to these causes of variation, are superadded those resulting from different processes pursued in the manipulations of slaking the lime and mixing the ingredients, no surprise should be felt at the seemingly opposite conclusions at which writers, who have pursued the subject experimentally, have arrived. From the great mass of facts, however, presented on this subject within a few years, some general rules may be laid down, which the engineer may safely follow, in the absence of the means of making direct experiments.

119. As to the action of salt water on artificial hydraulic limes made by mixing common lime with a natural or artificial puzzolana, opinion among European engineers seems divided. Some state that they withstand well the action of salt water; others that they only resist this action after the exposed surface becomes coated with barnacles, oysters, etc.

120. The view now generally taken of mortar is, that being an artificial sandstone, the nearer its constituents approach those of the natural sandstones, the better will be the result obtained; and that therefore the best proportions for its ingredients are those in which each grain of sand is enveloped with just sufficient lime, in a barely moist state, to cause the whole mass to cohere and set quickly. Too much lime causes shrinkage and cracks; and when too much water is added the mass in drying is found to be porous.

121. *Sand.* This material, which forms one of the ingredients of mortar, is the granular product arising from the disintegration of rocks. It may, therefore, like the rocks from which it is derived, be divided into three principal varieties—the silicious, the calcareous, and the argillaceous.

Sand is also named from the locality where it is obtained, as *pit sand*, which is procured from excavations in alluvial, or other deposits of disintegrated rock; *river sand*, and *sea sand*, which are taken from the shores of the sea, or rivers.

Builders again classify sand according to the size of the grain. The term *coarse sand* is applied when the grain varies between $\frac{1}{8}$ th and $\frac{1}{16}$ th of an inch in diameter; the term *fine sand*, when the grain is between $\frac{1}{16}$ th and $\frac{1}{24}$ th of an inch in diameter; and the term *mixed sand* is used for any mixture of the two preceding kinds.

122. The silicious sands, arising from the quartzose rocks, are the most abundant, and are usually preferred by builders.

The calcareous sands, from hard calcareous rocks, are more rare, but form a good ingredient for mortar. Some of the argillaceous sands possess the properties of the less energetic puzzolanas, and are therefore very valuable, as forming with common lime an artificial hydraulic lime.

123. The property which some argillaceous sands possess, of forming with common, or slightly hydraulic lime a compound which will harden under water, has been long known in France, where these sands are termed *arènes*. The sands of this nature are usually found in hillocks along river valleys. These hillocks sometimes rest on calcareous rocks, or argillaceous tufas, and are frequently formed of alternate beds of the sand and pebbles. The sand is of various colors, such as yellow, red, and green, and seems to have been formed from the disintegration of clay in a more or less indurated state. The *arènes* are not as energetic as either natural or artificial puzzolanas; still they form, with common lime, an excellent mortar for masonry exposed either to the open air, or to humid localities, as the foundations of edifices.

124. Pit-sand has a rougher and more angular grain than river or sea sand; and, on this account, is generally preferred by builders for mortars used for brick, or stone-work. Whether it forms a stronger mortar than the other two is not positively settled, although some experiments would lead to the conclusion that it does.

125. River and sea sand are by some preferred for plastering, because they are whiter, and have a finer and more uniform grain than pit sand; but as the sands from the shores of tidal waters contain salts, they should not be used, owing to their hygrometric properties, before the salts are dissolved out in fresh water by careful washing.

126. Pit sand is seldom obtained free from a mixture of dirt, or clay; and these, when found in any notable quantity in it, give a weak and bad mortar. Earthy sands should, therefore, be cleansed from dirt before using them for mortar; this may be effected by washing the sand in shallow vats, and allowing the turbid water, in which the clay, dust and other like impurities are held in suspension, to run off.

127. Sand, when pure or well cleansed, may be known by not soiling the fingers when rubbed between them.

128. Hydraulic mortar. This material may be made from the natural hydraulic limes; from those which are prepared by M. Vicat's process; or from a mixture of common or feebly hydraulic lime with a natural or artificial puzzolana. All writers, however, agree that it is better to use a natural

than an artificial hydraulic lime, when the former can be readily procured.

129. When the lime used is strongly hydraulic, M. Vicat is of opinion that sand alone should be used with it, to form a good hydraulic mortar. General Treussart has drawn the conclusion, from his experiments, that the mortar of all hydraulic limes is improved by an addition of a natural or artificial puzzolana. The quantity of sand used may vary from $1\frac{1}{2}$ to 2 parts of the lime in bulk, when reduced to a thick pulp.

130. The practice of the United States Corps of Engineers, in the construction of heavy masonry, has been to add from 2.5 to 3.5, in bulk, of compact sand to one of lime of a thick paste in the composition of their hydraulic mortars; and it has been found that an equal bulk of common lime in paste can be mixed with hydraulic cement paste without occasioning any material diminution in the strength of the resulting mortar.

131. For hydraulic mortars, made of common, feeble, or ordinary hydraulic limes, and artificial puzzolana, M. Vicat states that the puzzolana should be the weaker as the lime is more strongly hydraulic; using, for example, a very energetic puzzolana with a fat or a feebly hydraulic lime. The proportion of sand which can be incorporated with these ingredients, to form an hydraulic mortar, is stated by General Treussart to be one volume to one of puzzolana, and one of lime in paste.

132. In proportioning the ingredients, the object to which the mortar is to be applied should be regarded. When it is to serve to unite stone, or brick work, it is better that the hydraulic lime should be rather in excess: when it is used as a *matrix* for beton, no more lime should be used than is strictly required. No harm will arise from an excess of good hydraulic lime, in any case; but an excess of common lime is injurious to the quality of the mortar.

133. Common and ordinary hydraulic limes, when made into mortar with *arènes*, give a good material for hydraulic purposes. The proportions in which these have been found to succeed well, are one of lime to three of *arènes*.

134. Hydraulic cement, from the promptitude with which it hardens, both in the air and under water, is an invaluable material where this property is essential. Any dose of sand injures its properties as a cement. But hydraulic cement may be added with decided advantage to a mortar of common, or of feebly hydraulic lime and sand. It is in this

way that it is generally used in our public works. The French engineers give the preference to a good hydraulic mortar over hydraulic cement, both for uniting stone, or brick work, and for plastering. They find, from their practice, that when used as a stucco, it does not withstand well the effects of weather; that it swells and cracks in time; and, when laid on in successive coats, that they become detached from each other.

General Pasley, who has paid great attention to the properties of natural and artificial hydraulic cements, does not agree with the French engineers in his conclusions. He states that, when skilfully applied, hydraulic cement is superior to any hydraulic mortar for masonry, but that it must be used only in thin joints, and when applied as a stucco, that it should be laid on in but one coat; or, if it be laid on in two, the second must be added long before the first has set, so that, in fact, the two make but one coat. By attending to these precautions, General Pasley states that a stucco of hydraulic cement and sand will withstand perfectly the effects of frost.

135. Mortars exposed to weather.—The French engineers, who have paid great attention to the subject of mortars, coincide in the opinion, that a mortar cannot be made of fat lime and any inert sands, like those of the silicious, or calcareous kinds, which will withstand the ordinary exposure of weather; and that, to obtain a good mortar for this purpose, either the hydraulic limes mixed with sand must be employed, or else common lime mixed either with *arènes*, or with a puzzolana and sand.

136. Any pure sand, mixed in proper proportions with hydraulic lime, will give a good mortar for the open air; but the hardness of the mortar will be affected by the size of the grain, particularly when hydraulic lime is used. Fine sand yields the best mortar with good hydraulic lime; mixed sand with the feebly hydraulic limes; and coarse sand with fat lime.

137. For mortar to be used for filling the exterior of the joints, or as it is termed, for pointing, the amount of lime paste in bulk should be but slightly greater than that of the void spaces of grains of sand. The bulk of sand for this purpose should be from 2.5 to 2.75 that of the lime paste.

138. The proportion which the lime should bear to the sand seems to depend, in some measure, on the manner in which the lime is slaked. M. Vicat states, that the strength of mortar made of a stiff paste of fat lime, slaked in the ordinary way, increases from 0.50 to 2.40 to one of the paste in

volume; and that, when the lime is slaked by immersion, one volume of the like paste will give a mortar that increases in strength from 0.50 to 2.20 parts of sand.

For one volume of a paste of hydraulic lime, slaked in the ordinary way, the strength of the mortar increases from 0 to 1.80 parts of sand; and, when slaked by immersion, the mortar of a like paste increases in strength from 0 to 1.70 parts of sand. In every case, when the dose of sand was increased beyond these proportions, the strength of the resulting mortar was found to decrease.

139. Manipulations of mortar.—The quality of hydraulic mortar, which is to be immersed in water, is more affected by the manner in which the lime is slaked, and the ingredients mixed, than that of mortar which is to be exposed to the weather; although in both cases the increase of strength, by the best manipulations, is sufficient to make a study of them a matter of some consequence.

140. The results obtained from the ordinary method of slaking, by sprinkling, or by immersion, in the case of good hydraulic limes, are nearly the same. Spontaneous, or air-slaking, gives invariably the worst results. For common and slightly hydraulic lime, M. Vicat states that air-slaking yields the best results, and ordinary slaking the worst.

141. The ingredients of mortar are incorporated either by manual labor, or by machinery: the latter method gives results superior to the former. The machines commonly used for mixing mortar are either the ordinary pug-mill (Fig. 12) employed by brickmakers for tempering clay, or a grinding-mill (Fig. 13). The grinding-mill is the best machine, because it not only reduces the lumps, which are found in the most carefully burnt stone, after the slaking is apparently complete, but it brings the lime to the state of a uniform stiff paste, which it should receive before the sand is incorporated with it. The same should be done with respect to the addition of cement, or of an alkaline silicate to the lime paste, the former in powder, and the latter in solution, being uniformly sprinkled over the surface and then thoroughly incorporated with the other materials by the action of the mill. Care should be taken not to add too much water, particularly when the mortar is to be immersed in water. The mortar-mill, on this account, should be sheltered from rain; and the quantity of water with which it is supplied may vary with the state of the weather. Nothing seems to be gained by carrying the process of mixing beyond obtaining a uniform mass of the consistence of plastic clay. Mortars of hydraulic lime are injured by long expo-

sure to the air, and frequent turnings and mixings with a shovel or spade; those of common lime, under like circum-

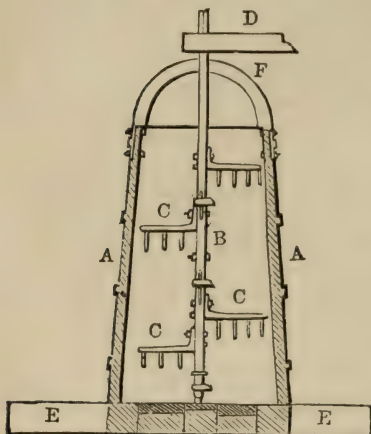


Fig. 12 represents a vertical section through the axis of a pug-mill, for mixing or tempering mortar.—This mill consists of a hooped vessel, of the form of a conical frustum, which receives the ingredients, and a vertical shaft, to which arms with teeth, resembling an ordinary rake, are attached, for the purpose of mixing the ingredients.

- A, A, section of sides of the vessel.
- B, vertical shaft to which the arms C are affixed.
- D, horizontal bar for giving a circular motion to the shaft B.
- E, sills of timber supporting the mill.
- B, wrought-iron support through which the upper part of the shaft passes.

stances seem to be improved. Mortar which has been set aside for a day or two, will become sensibly firmer; if not




Fig. 13 represents a part of a mill for crushing the lime and tempering the mortar.

- A, heavy wheel of timber, or cast iron.
- B, horizontal bar passing through the wheel, which at one extremity is fixed to a vertical shaft, and is arranged at the other (C) with the proper gearing for a horse.
- D, a circular trough, with a trapezoidal cross section which receives the ingredients to be mixed. The trough may be from 20 to 30 feet in diameter; about 18 inches wide at top, and 12 inches deep; and be built of hard brick, stone, or timber laid on a firm foundation.

allowed to stand too long, it may be again reduced to its clayey consistence, by simply pounding it with a beetle, without any fresh addition of water.

Fort Warren Mortar Mill.—This mill (Fig. 14) which was used by Col. Thayer in the construction of Fort Warren, Boston Harbor, consists of a circular trough, built of brick, which was fifteen feet in diameter, measured between the centre line of the trough, the cross section of which (A) was thirty-three inches in width at the top, thirteen inches at the

bottom, and twenty-four inches deep. The brick side-walls (A) twelve inches thick at top, and built vertically on the interior and outside, rested on an annular trench of concrete,

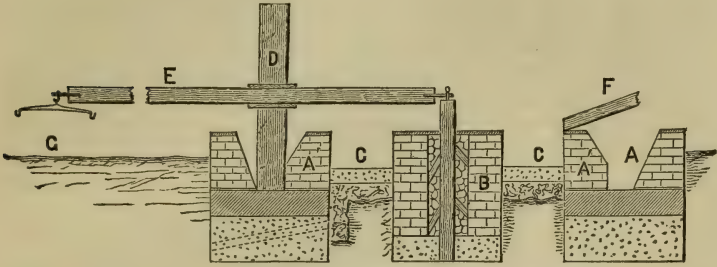


Fig. 14. Section through the axis of the Fort Warren Mortar Mill.

- A, Annular trough for mixing the mortar.
- A', Brick sides of trough.
- B, Central brick cylinder.
- C, Annular space for holding lime in paste.
- D, Wheel of mill.
- E, Shaft worked by horse power.
- F, Wooden trough for conveying lime paste to C.
- G, Horse track.

one foot thick, which was laid on an annular bed of broken stone, two feet thick, for drainage.

In the centre of the circle enclosed by the trough, a vertical post, surrounded with broken stone, encased by a brick cylinder (B) has a gudgeon at top, around which the horizontal shaft (E) turns, that gives motion to the wheel (D) for mixing the mortar.

The wheel (D) is made of wood on the sides and periphery, and has an iron tire twelve inches broad and half an inch thick; the interior being filled with sand to give it sufficient weight to grind any lumps in the lime to a paste. The diameter of the wheel is eight feet, and thickness eight inches.

The radius of the horse track for working the wheel is twenty feet.


The annular space between the trough and the brick cylinder in the centre is floored with concrete, resting on a bed of broken stone.

Lieut. W. H. Wright, in his *Treatise on Mortars*, thus describes the use made of this annular ring: "The space between the cylinder and trough is used as a reservoir for the slaked lime. It is conveniently divided by means of movable radial partitions into sixteen equal parts," each containing the sixteenth part of a cask of lime in paste.

A wooden trough (F) leads from the reservoir where the

lime is slaked and converted into a creamy consistence, to the annular ring (C), where it is allowed to stand as long as possible before being thrown, with the requisite quantity of sand, into the mill.

The malaxator.—Many advantages are claimed for a mill designed by M. Coignet, recently introduced in France, and employed in mixing *béton aggloméré* for the works in and about Paris. It is called a malaxator, and consists of twin screws, having their helices interlocked, and turning and exerting their force in the same direction. This machine may be described as follows :

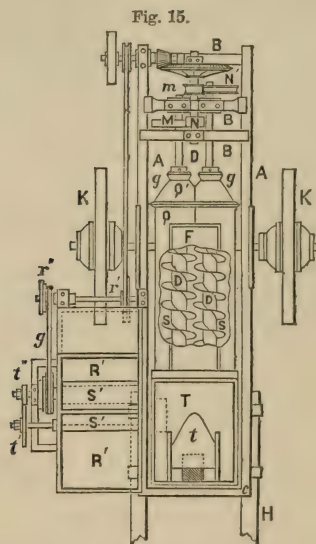

A is the frame of the machine, having at the upper end the cross-pieces B, upon which are mounted the gearings, and at the lower part the cross-piece *cc'*, upon which are fixed the rests or steps for the lower part of the helices to run in.

D are the cores of the helices, upon which are fastened either continuous or interrupted blades S S S, forming the thread of the helix. Continuous blades are more generally used.

K are wagon-wheels, mounted on an axle, which enable the machine to be transported thereon, and which, when the machine is in use, serve to maintain the malaxator at its proper

inclination (about twenty-five degrees). The brace J is used to steady the malaxator.

M N *m* N', gearings of any kind for giving motion to the helices, either by steam, horse-power, or hand-power; *g*, conical sleeves or stoppers, adjustable upon the shafts D, for regulating the exodus of the artificial stone paste, and by retarding the same, increasing the pressure and malaxation of the paste in the part Q' of the machine.

Q, body of the malaxator, corresponding in shape and size to the helices.

P, receiving chamber, where the materials enter the malaxator.

T, sand hopper, with its adjustable register or gate *t*, and, when required, a sifting apparatus; *g'*, sliding gate, to allow of the drainage of the machine.

S' S', feeding screws, working in the lower part of the two hoppers R' R', the one for lime, the other for sand, or any other material or substance to be introduced into the artificial stone paste, and feeding the same to the chamber P; *r r' r'' r'''*, pulleys, for chains or belts *g*, for transmitting the movement to the feeding screws S' S'; *t' t''*, spur-wheel and pinion (changeable for others of different relative speed), for regulating the exact amount of the two substances in the hoppers R' R', to be delivered, in so many turns of the helices, into the receiving chamber P.

Z is a pipe for supplying the water, for which there is an overflow at W. The sand being drowned or fully saturated in a given proportion, by varying the overflow W, gives the proper amount of water for each turn of the helices.

H are movable wooden shafts, which are placed in proper straps in the machine, and serve to hitch or harness a horse to the same when it has to be taken from one place to another, making it a perfect wagon.

The advantages claimed for the malaxator are the following:

First. The apparatus, having the receiving chamber P upon the ground, is fed easily, with little labor; and the part Q', or delivery, being elevated, allows of a wheelbarrow or basket being placed under to receive the artificial stone paste. This inclination also causes a more powerful malaxation, by retarding the progress of the matter, owing to the specific gravity.

Second. The gearings are out of the way, away from sand, water, dust, etc.

Third. The helices having their blades interlaid, their action upon the materials is of quite a different character than when said helices are not thus conjugated.

Fourth. The sand is gauged by a register. The lime and the hydraulic cement, the coloring matter, texture giver, or any other material used, may be also fed automatically, and the machine once set by the inspector, the product is invariably the same, besides saving the labor of a hand whose trustworthiness is required to obtain good results. The continuous introduction by small and regular quantities of the different

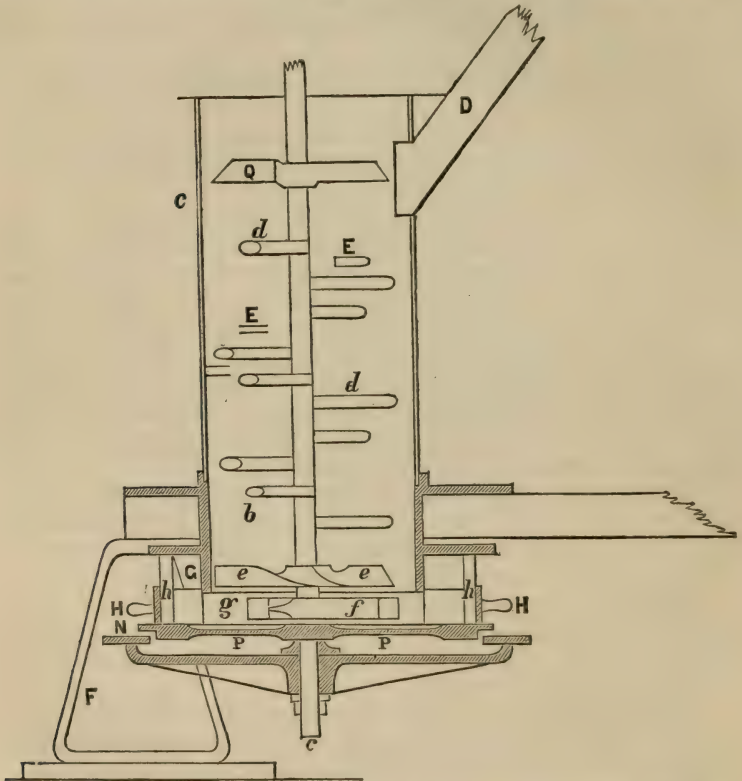


Fig. 16 represents a vertical section of the mixing cylinder for beton coignet.
a, side of cylinder.
b, cast iron base.
c, vertical shaft.
d, *d*, curved arms.
e, *e*, helicoidal blades.
f, *f*, cycloidal arms.
g, horizontal opening at the base.

h, *h*, vertical guides for movable band.
E, *E*, short stationary arms.
G, *G*, movable band.
H, *H*, handles for lifting band.
I, supply trough.
L, scraper.
N, revolving horizontal plate.
P, immovable bottom plate.

substances, and the constant amount of the water supplied to the sand, place the materials in the best circumstances for producing, by proper action of the helices, an excellent result,

difficult to obtain if the component ingredients had been thrown in by shovel or basketfuls at a time. (See *Professional Papers, Corps of Engineers*, No. 19).

Another form of mill, which is shown in Fig. 16, has been made use of in France for mixing certain kinds of beton. It consists of a vertical cylinder *a* resting on a cylindrical base of cast iron *b*. A vertical shaft *c* passes through the cylinder, having attached to it curved arms *d*, which, by revolving horizontally, serve to mix the sand and lime. The distributor *Q* revolves horizontally, receives the sand and lime which come from the conducting trough *I*, and distributes them equally around for mixing. Short stationary arms *E E* are attached to the side of the cylinder, and form, with the movable arms, breaks for dashing and mixing the sand and lime. Three helicoidal blades *e e*, attached to the lower part of the shaft, force the mixture downwards and outwards. Cycloidal arms *f, f*, revolving horizontally near the floor of the cylinder, expel the mixture at the side opening around the bottom. A movable band of iron *G G*, by being moved up or down, enlarges or diminishes the opening around the bottom. *h h*, vertical guiding shafts for movable band. *H H*, handles by which the band *G G* is moved. A plate *N* is attached to *c* and revolves horizontally, receiving the mixture from the cylinder. A curved plate of iron *L*, fixed to immovable bottom-plate *P*, scrapes mixture from *N* as it revolves.

143. Setting and durability of mortars. Mortar of common lime, without any addition of puzzolana, will not set in humid situations, like the foundations of edifices, until after a very long lapse of time. They set very soon when exposed to the air, or to an atmosphere of carbonic acid gas. If, after having become hard in the open air, they are placed under water, they in time lose their cohesion and fall to pieces.

144. Common mortars, which have had time to harden, resist the action of severe frosts very well, if they are made rather *poor*, or with an excess of sand. The sand should be over 2.40 parts, in bulk, to one volume of the lime in paste; and coarse sand is found to give better results than fine sand.

145. Good hydraulic mortars set equally well in damp situations, and in the open air; and those which have hardened in the air will retain their hardness when immersed in water. They also resist well the action of frost, if they have had time to set before exposure to it; but, like common mortars, they require to be made with an excess of sand, to withstand well atmospheric changes.

146. The surface of a mass of hydraulic mortar, whether

made of a natural hydraulic lime or otherwise, when immersed in water, becomes more or less degraded by the action of the water upon the lime, particularly in a current. When the water is stagnant, a very thin crust of carbonate of lime forms on the surface of the mass, owing to the absorption by the lime of the carbonic acid gas in the water. This crust, if the water be not agitated, will preserve the soft mortar beneath it from the farther action of the water, until it has had time to become hard, when the water will no longer act upon the lime in any perceptible degree.

147. Hydraulic mortars set with more or less promptness, according to the character of the hydraulic lime, or of the puzzolana which enters into their composition. Artificial hydraulic mortars, with an excess of lime, set more slowly than when the lime is in a just proportion to the other ingredients.

148. The quick-setting hydraulic limes are said to furnish a mortar which, in time, acquires neither as much strength nor hardness as that from the slower-setting hydraulic limes. Artificial hydraulic mortars, on the contrary, which set quickly gain, in time, more strength and hardness than those which set slowly.

149. The time in which hydraulic mortars, immersed in water, attain their greatest hardness, is not well ascertained. Mortars made of strong hydraulic limes do not show any appreciable increase of hardness after the second year of their immersion; while the best artificial hydraulic mortars continue to harden, in a sensible degree, during the third year after their immersion.

150. It is found from experience that those mortars which attain the highest degree of hardness on the surface, absorb the least amount of water and are less liable to injury from frost and weather.

151. **Theory of Mortars.** The paste of a hydrate, either of common or of hydraulic lime, when exposed to the air, absorbs carbonic acid gas from it; passes to the state of sub-carbonate of lime; without, however, rejecting the water of the hydrate, and gradually hardens. The time required for the complete saturation of the mass exposed, will depend on its bulk. The absorption of the gas commences at the surface and proceeds more slowly towards the centre. The hardening of mortars exposed to the atmosphere is generally attributed to this absorption of the gas, as no chemical action of lime upon quartzose sand, which is the usual kind employed for mortars, has hitherto been detected by the most careful experiments.

The depth to which the absorption of carbonic acid extends in hydraulic lime, and also in some degree the hardening, decreases as the hydraulic energy caused by the silica that enters into their composition is the greater.

152. With regard to hydraulic mortars, it is difficult to account for their hardening, except upon the effect which the silicate of lime may have upon the excess of simple hydrate of uncombined lime contained in the mass. M. Petot supposes, that the particles of silicate of lime form so many centres, around which the uncombined hydrates group themselves in a crystalline form; becoming thus sufficiently hard to resist the solvent action of water. With respect to the action of quartzose sand in hydraulic mortars, M. Petot thinks that the grains produce the same mechanical effect as the particles of the silicate of lime, in inducing the aggregation of the uncombined hydrate.

V.

CONCRETE. BETON.

153. This term is applied, by English architects and engineers, to a mortar of finely-pulverized quick-lime, sand, and gravel. These materials are first thoroughly mixed in a dry state, sufficient water is added to bring the mass to the ordinary consistence of mortar, and it is then rapidly worked up by a shovel, or else passed through a pug-mill. The concrete is used immediately after the materials are well incorporated, and while the mass is hot.

154. The materials for concrete are compounded in various proportions. The most approved are those in which the lime and sand are in the proper proportions to form a good mortar, and the gravel is twice the bulk of the sand. The gravel used should be clean, and any pebbles contained in it larger than an egg, should be broken up before the materials are incorporated.

155. Hot water has in some cases been used in making concrete. It causes the mass to set more rapidly, but is not otherwise of any advantage.

156. The bulk of a mass of concrete, when first made, is found to be about one-fifth less than the total bulk of the dry materials. But, as the lime slakes, the mass of concrete is found to expand about three-eighths of an inch in height, for every foot of the mass in depth.

157. The use of concrete is at present mostly restricted to forming a solid bed, in bad soils, for the foundations of edifices. It has also been used to form blocks of artificial stone, for the walls of buildings and other like purposes; but experience has shown that it possesses neither the durability nor strength requisite for structures of a permanent character, when exposed to the action of water, or of the weather.

158. BETON. The term *béton* is applied, by French engineers, to any mixture of hydraulic mortar with fragments of brick, stone, or gravel; and it is now also used by English engineers in the same sense.

159. The proportions of the ingredients used for *béton* are variously stated by different authors. The sole object for which the gravel, or the broken stone is used, being to obtain a more economical material than a like mass of hydraulic mortar alone would yield, the quantity of broken stone should be as great as can be thoroughly united by the mortar. The smallest amount of mortar, therefore, that can be used for this purpose, will be that which will be just equal in volume to the void spaces in any given bulk of the broken stone, or gravel. The proportion which the volume occupied by the void spaces bears to any bulk of a loose material, like broken stone, or gravel, may be readily ascertained by filling a vessel of known capacity with the loose material, and pouring in as much water as the vessel will contain. The volume of water thus found, will be the same as that of the void spaces.

Béton made of mortar and broken stone, in which the proportions of the ingredients were ascertained by the process just detailed, has been found to give satisfactory results; but, in order to obviate any defect arising from imperfect manipulation, it is usual to add an excess of mortar above that of the void spaces.

160. In a large amount of concrete used for the foundation bed and backing of the sea walls built for the protection of the islands in Boston Harbor, which was composed of hydraulic mortar made with salt water and the common shingle of the shores, which varied in size from that of a pea to pebbles of six inches in diameter, the proportions used for the foundation bed was about one part in volume of stiff mortar to three

parts in volume of shingle for the foundation bed, and two and seven-tenths parts for the backing of the walls. The small and large pebbles of the shingle were so proportioned as to give the least amount of void space to be filled by the mortar; this void space being from twenty to twenty-five per cent. of the volume of shingle.

The materials were mixed by hand; the shingle first being spread out upon a platform of rough boards to the depth of from eight to twelve inches, the larger pebbles on top; the mortar was spread in a layer of uniform thickness over this, and the whole worked up with shovels and hoes until thoroughly incorporated.—(Papers on Practical Engineering, No. 2. Report of Col. S. Thayer, U. S. Corps of Engineers.)

In the hydraulic concrete used upon some others of our public works, the broken fragments of granite were in bulk about $1\frac{1}{2}$ that of the hydraulic mortar. Besides this, other fragments, from a quarter to three-quarters of a cubic foot each, and forming about one-twelfth of the volume of the concrete, were worked into the layer as they were carried up. This practice is a very usual one for foundation beds, as it effects a saving of cost.

The best and most economical béton is made of a mixture of broken stone, or brick, in fragments not larger than a hen's egg, and of coarse and fine gravel mixed in suitable proportions.

In making béton, the mortar is first prepared, and then incorporated with the finer gravel; the resulting mixture is spread out into a cake, 4 or 6 inches in thickness, over which the coarser gravel and broken stone are uniformly strewed and pressed down, the whole mass being finally brought to a homogeneous state with the hoe and shovel.

Béton is used for the same purposes as concrete, to which it is superior in every respect, but particularly so for foundations laid under water, or in humid localities.

161. Béton made of small fragments of stone or pebbles has within recent years been applied to the construction of the walls of houses. For this purpose, the concrete is laid up in layers and rammed within a plank boxing having an interior width equal to the thickness of wall. The sides of the boxing are confined by vertical posts which can be suitably adjusted to the required thickness of the wall; the whole being supported by a suitable scaffolding. In the case of hollow walls, a slip of board of the thickness of the required hollow, or void, and slightly wedge-shaped to admit of its being easily removed, is laid horizontally within the box, and the layer of

concrete rammed well in around it; ordinary brick being inserted as ties to connect the interior and exterior portions of the wall.

In the sewers and many public and private edifices recently constructed in Paris of concrete, the proportions used were one part in volume of lime, one fourth of one volume of hydraulic cement, to five volumes of sand. It is stated that in six or eight hours after beginning a given length of sewer the centres can be safely removed; and that, in four or five days after a section has been completed, it can be opened for use. For the construction of arches, the volume of cement used is doubled.

Some of the buildings above referred to were constructed with groined or cylindrical arched fire-proof floors, of spans from nine to twenty-eight feet, the rise in each case being one tenth of the span; the thickness of the arches, at the crown, varying from five and a half to fourteen inches.

The crushing weight of this concrete is nearly fifty-four hundred pounds to the square inch; the tenacity about five hundred pounds.

162. An artificial sandstone, termed *Béton-Coignet* from the inventor, is very extensively manufactured and used in France for all building purposes, as foundations, walls, light arches, etc. It sets and hardens in a comparatively short time. Its constituents are clean river sand from four to five parts in volume; common or hydraulic lime one part in volume; hydraulic or artificial Portland cement from one-quarter to three-quarters of one part in volume; water variable, but only enough to moisten the other materials and cause them to cohere. Coarse sand from one-twentieth to three-twentieths of an inch in diameter is said to give the best results; the finer sands requiring more care in the preparation of the concrete and in packing it when laid to secure greater solidity.

163. In preparing the concrete the lime and sand are made into heaps of about one cubic yard in volume in alternate layers of the two ingredients. Each heap is then worked up dry with the shovel. In this state it is delivered by suitable machinery, like that for raising grain, into the top of a pug-mill of a cylindrical body formed of boiler iron. The revolving vertical shaft of the mill, which is driven by steam or animal power, has curved arms affixed horizontally to it, the two lower arms being of suitable forms to press the mixed material downwards, and expel it through an aperture, where it is received into boxes, or hand barrows, and conveyed to

where it is to be laid or moulded. The water for the mixing is either thrown in as needed, by hand into the top of the mill, or else supplied by a circular trough perforated with holes, which is placed around the inside of the mill at top. When cement is one of the ingredients, it is first made into a suitable paste with water, and then added to the others, from a vessel over the top of the mill, from which it is poured in a uniform manner, and in the requisite amount.

164. For all ordinary work, one passage through the pug-mill is sufficient, but where greater thoroughness in the mixture is a requisite, the concrete may be passed through the mill a second time.

165. The concrete when laid or moulded is put in in successive layers, from one to three inches in thickness, and packed moderately by hand with pestles weighing from fifteen to thirty pounds.

166. To increase the rapidity of the setting, when necessary, the materials may be heated, in process of mixing, by a spiral tube or worm, through which heated air, steam, or hot water is caused to circulate.

167. Among other artificial conglomerates, that known as Ransome's artificial stone, from the name of the inventor, is now coming into use in England. This material consists of clean river sand the grains of which are cemented with the silicate of lime. To effect this union a silicate of soda is formed, by digesting common flints in a solution of caustic soda, in iron air-tight cylindrical vessels, by means of steam, under a pressure of seventy pounds, which circulates through a coil of iron pipes. The sand, after being thoroughly dried, is mixed with a sufficient volume of finely ground carbonate of lime to fill the voids between the grains. To each bushel of this mixture a gallon of the silicate is added, and the whole thoroughly mixed in a loam mill. The mixture is then moulded, and immediately after the solution of the chloride of calcium is thrown over it with ladles; the moulded blocks are then immersed in the solution, in open tanks, which is kept boiling, by steam passed through it in pipes, for several hours, according to the size of the blocks. This process expels any air that may have been retained in the blocks and facilitates the forming of the silicate of calcium. The block is then taken out and the chloride of sodium, that has been formed, thoroughly washed out with fresh water poured over the block.

This artificial stone is found to be very hard, and some specimens to have offered as great a resistance to rupture, by

compression and extension, as the best sandstones and marbles.

168. General Gillmore in his Report, *Professional Papers, Corps of Engineers*, No. 19, gives the following account of *béton-Coignet* or *aggloméré*.

Béton Agglomère. This name is given to a *béton* of very superior quality, or, more properly speaking, an artificial stone of great strength and hardness, which has resulted from the experiments and researches, extending through many years, of M. François Coignet, of Paris.

The essential conditions which must be carefully observed in making this *béton* are as follows :

First. Only materials of the first excellence of their kind, whether common or hydraulic lime, or hydraulic cement, can be used for the matrix.

Second. The quantity of water must not exceed what is barely sufficient to convert the matrix into a stiff, viscous paste.

Third. The matrix must be incorporated with the solid ingredients by a thorough and prolonged mixing or trituration, producing an artificial stone paste, decidedly incoherent in character until compacted by pressure, in which every grain of sand and gravel is completely coated with a thin film of the paste. There must be no excess of paste when the matrix is common lime alone. With hydraulic lime this precaution is less important, and with good cement it is unnecessary.

Fourth. The *béton* or artificial stone is formed by thoroughly ramming the stone paste, in thin, successive layers, with iron-shod rammers.

169. The materials employed in making his *béton* are sand, common lime, hydraulic lime, and Portland cement.

The sand should be as clean as that ordinarily required for mortar, for stone or brick masonry of good quality. Sand containing 5 or 6 per cent. of clay may be used without washing, for common work, by proportionally increasing the amount of matrix. Either fine or coarse sand will answer, or, preferably, a mixture of both, containing gravel as large as a small pea, and even a small proportion of pebbles as large as a hazel nut. There is an advantage in mixing several sizes together, in such proportion as shall reduce the volume of voids to a minimum. Coarse sand makes a harder and stronger *béton* than fine sand. The extremes to be avoided are a too minute subdivision and weakening of the matrix, by the use of fine sand only, on the one hand, and an undue enlargement of the volume of voids, by the exclusive use of coarse sand, on the other.

The silicious sands are considered the best, though all kinds are employed. When special results are desired in the way of strength, texture, or color, the sand should be selected accordingly.

170. The common lime should be air-slaked, or, better still, it may be slaked by aspersion with the minimum quantity of water that will reduce it to an impalpable powder. It should be passed through a fine wire screen to exclude all lumps, and used within a day or two after slaking, or else kept in boxes or barrels protected from the atmosphere.

It is scarcely practicable, under ordinary circumstances, to employ fat lime alone as the matrix of *béton aggloméré*, particularly in monolithic constructions, in consequence of its tardy induration. Even when used in combination with hydraulic lime or cement it acts as a diluent.

171. Attempts to make *béton* of even average quality, without good hydraulic ingredients, have failed in the United States; and it is extremely doubtful whether any characteristic excellence can be attained, after the lapse of weeks or even months, by a mixture of this character.

172. The most suitable hydraulic limes are those derived from the argillaceous limestones, in contradistinction to the magnesian or argillo-magnesian varieties. These limestones contain before burning from 15 to 25 per cent.—generally less than 20 per cent.—of clay. After burning, the lime is slaked to powder by aspersion with water, and sifted to exclude unslaked lumps.

Hydraulic lime cannot be considered an essential ingredient of *béton aggloméré*, except in comparison with common lime. It may be altogether replaced by good hydraulic cement, or it may be used alone, or mixed with common lime, to the entire exclusion of cement. A stiff paste of this lime should set in the air in from ten to fifteen hours, and sustain a wire point one-twenty-fourth of an inch in diameter, loaded with one pound, in eighteen to twenty-four hours. Its energy, and therefore its value, varies directly with the amount of clay which it contains, which generally will not exceed 20 per cent. before burning, although it may reach 25 per cent. Beyond this point the burnt stone can seldom be reduced by slaking and becomes a cement.

No hydraulic lime of this variety has ever been manufactured in the United States. It is not known that stone suitable for it exists here.

173. The heavy slow-setting Portland cements, natural or

artificial, are the only ones suitable for *béton aggloméré*. They are manufactured extensively throughout Europe.

This cement is produced by burning, with a heat of great intensity and duration, argillaceous limestones, containing from 20 to 22 per cent. of clay, or an artificial mixture of carbonate of lime and clay in similar proportions, and then reducing the product to fine powder between millstones. In this condition its weight should not fall short of 101 pounds and will seldom exceed 128 pounds to the bushel, poured in loosely and struck, without being shaken down or compacted. Between these limits additional weight may always be conferred in the burning, by augmenting the intensity and duration of the heat; and both the tensile strength, and the time required to *set*, increase directly with the weight. For example, a Portland cement weighing 100 pounds to the United States bushel, that will set in half an hour, and sustain when seven days old a tensile strain of 200 pounds on a sectional area of one square inch, would have its time for setting increased to four or five hours, and its tensile strength to about 400 pounds, if burnt to weigh 124 pounds to the bushel. An increase in weight of 24 pounds to the bushel nearly doubles the ultimate tensile strength of Portland cement.

When the matrix of *béton aggloméré* is Portland cement alone, it is customary to prolong the process of trituration, in order to retard the set; or, if more convenient, the mixture may be passed through the mill twice or even three times, with an interval of an hour or more between each mixing. This course is specially desirable when the cement weighs less than 100 hundred pounds to the bushel, and is correspondingly quick-setting.

174. English engineers generally require that the cement shall be ground so fine that at least 90 per cent. of it shall pass a No. 30 wire sieve, of 36 wires to the lineal inch, and shall weigh not less than 106 pounds to the struck bushel, when loosely poured into the measure. When made into a stiff paste without sand, it should be capable of sustaining without rupture a tensile strain of 400 pounds on a sectional area $1\frac{1}{2}$ inch square, or $2\frac{1}{4}$ square inches (equal to 178 pounds to the sectional square inch), seven days after being moulded the sample being immersed six of these days in fresh water.

175. Experience has repeatedly demonstrated, and they have become well recognized facts, that in order to obtain uniformly good *béton* or artificial stone, with sand, and

either hydraulic lime or Portland cement, or both, it is necessary—

First. To regulate, in a systematic manner, the amount of water employed in the manufacture thereof.

Second. To obtain, with a minimum quantity of water, the cementing material or matrix in a state of plastic or viscous paste.

Third. To cause each grain of sand or gravel to be entirely lubricated with a thin film or coating of this paste; and

Fourth. To bring each and every grain into close and intimate contact with those which surround it.

It is also equally true, that the best results possible to be produced from any given materials will be attained when the above-named conditions are enforced.

176. It is impossible to produce a cementing material, of suitable quality for *béton aggloméré*, by the ordinary methods and machinery used for making mortars; for if we take the powder of hydraulic lime or Portland cement, and add the quantity of water necessary to convert it into a paste by the usual treatment, it will usually contain so much moisture, even after being incorporated with the sand, that it cannot be compacted by ramming, but will yield under the repeated blows of the rammer like jelly. If the quantity of water be reduced to that point which would render the mixture, with the usual treatment, susceptible of being thoroughly compacted by rammers, much of the cementing substance will remain more or less inert, and will perform but indifferently well the functions of a matrix.

177. To prepare the matrix, there is taken of the hydraulic lime or cement powder, say one hundred parts, by measure, and of water from thirty to thirty-five or forty parts, which should be the smallest amount that will accomplish the object in view. These are introduced together into a suitable mill, acting upon the materials by both compression and friction, and are subjected to a thorough and prolonged trituration, until the result is a plastic, viscous, and sticky paste, of a peculiar character, in both its physical appearance and the manner in which it comports itself under the subsequent treatment with rammers. There would appear to be no mystery in this part of the process, yet the excellence of the *béton aggloméré* is greatly dependent on its proper execution.

If too much water be used, the mixture cannot be suitably rammed; if too little, it will be deficient in strength.

178. The sand should be deprived of surplus moisture,

although it is not necessary that it be absolutely dry. A uniform state of moisture or dryness should be aimed at, in order that the proper quantity of water may be added with certainty.

179. The matrix in paste, and the sand, having been mixed together in the desired proportions (given hereafter), are then introduced into a powerful mill, and subjected to a thorough and energetic trituration until, without the addition of more water, the paste presents the desired degree of homogeneity and plasticity.

When, for any special purpose, it is desired to introduce into the mixture a quantity of Portland cement, in order to increase the hardness or the rapidity of induration, it had better be added during the process of trituration, mixed with the requisite increment of water, so that after proper mixing the whole material will present the appearance of a short paste, or pasty powder, which is quite characteristic of this process of manipulation.

In ordinary practice, when sand and hydraulic lime only are employed, it will be found to answer very well to mix the two together dry, with shovels, and then spread them out on the floor, and sprinkle them with the requisite minimum amount of water. The dampened mixture is then shoveled into the mill and trituated, as already described.

When a portion of Portland cement is used, it may also be incorporated with the other ingredients before the water is added, or introduced into the mixture in the mill, as may be preferred.

When Portland alone is used for the matrix, the process is the same as when lime alone is used, except that the trituration should be more prolonged, especially if the cement be rather light and quick-setting.

Having both equally at command, the following proportions are employed for divers purposes, according to circumstances and the quality of the materials :

Sand, by volume.....	6	5	4	5	5	4	4	5	5	5
Hydraulic lime in powder, by volume.....	1	1	1	1	1	1	1	1	1	1
Portland cement in powder, by volume.....	0	0	0	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{4}$	$\frac{1}{2}$	1	$1\frac{1}{2}$	$1\frac{1}{2}$

It will rarely occur that the proportions given in the two columns on the right of the above table need be used. They

are suitable for ornamented blocks, requiring removal and handling a day or two after being made.

It may sometimes happen that too much water has been introduced in the preparation of the paste. A proper corrective, in such case, is the introduction into the mill of a suitable quantity of each of the ingredients, mixed together dry in the required proportions.

By employing none but white sand and the lighter-colored varieties of lime and cement, a stone closely imitating white marble may be made, while, by the introduction of coloring matter into the paste, such as ochres, oxides, carbonates, etc., or fragments of natural stones, any variations in shade or texture may be produced, from the most delicate buff and drab, to the darkest grays and browns.

In some cases it may be found more convenient to measure the ingredients directly into the mill, alternating with the different materials, in regular order, using for the purpose measures of various sizes, corresponding with the required proportions.

When it is specially desirable to obtain stone of the maximum degree of strength and hardness, the paste may be returned a second or even a third time to the mill, but in all cases the mass must be brought to the characteristic state of incoherent pasty powder, or short paste.

180. The materials, after being mixed to a state of pasty powder, have to be agglomerated in moulds, in order to become *béton* or artificial stone. In other words, the grains of sand and gravel, each coated all over with a thin film of the matrix—entirely exhausting the matrix thereby—have to be brought into close and intimate contact with each other. This is accomplished by ramming the paste in thin, successive layers, in a mould of the form and dimensions required for the stone, and made so as to be capable of sustaining heavy pressure from within, and of being taken apart at pleasure.

Into this mould, supposing it to be for a detached building block, and not for monolithic masonry, a quantity of the stone paste is thrown with a shovel, and spread out in a layer from $1\frac{1}{2}$ to 2 inches thick. It is then thoroughly compacted by the repeated and systematic blows of an iron-shod rammer, until the stratum of material is reduced to about one-third its original thickness. When this is done, its surface is scratched or roughened up with an iron rake, in order to secure a perfect bond with the succeeding stratum, and more of the material is added and packed in the same manner. This process is continued until the mould is full. The upper surface is then

struck with a straight-edge, and smoothed off with a trowel, after which the full mould may at once be turned over on a bed of sand, and the bottom, side, and end pieces removed. The block is then finished. If small, such as one man can handle, it may be safely removed after one day. Larger pieces, like sills, lintels, steps, platforms, etc., should be allowed a longer time to harden, in consequence of their greater weight.

In case of monolithic masonry, the moulds usually consist of a series of planks placed one above the other horizontally, and supported against exterior uprights, so arranged as to give the required form to the work under construction. These planks are raised up as the wall progresses, so that each day's work shall unite intimately with that of the previous day, producing a smooth and even surface, without joints, ridges, or marks of any kind.

A characteristic property of this stone paste, when properly mixed, is that it does not assume a jelly-like motion when rammed.

Its degree of moisture must be precisely such that the effect of each blow of the rammer shall be distinct, local, and permanent, without disturbing the contiguous material compacted by previous blows. If it be too moist, the mass will shake like wet clay, and if it be too dry, it will break up around the rammer like sand. In either case the materials cannot be compacted and agglomerated in that manner and to that degree which is characteristic of, and peculiar to, *béton aggloméré*.

In monolithic buildings of this *béton*, it is customary to construct all the flues, pipes, and other openings for heating and ventilating, and for conveying water, gas, and smoke, in the thickness of the wall, by using movable cores of the required size and form, around which the material is packed. As the work progresses the cores are moved up.

Ornamental work of simple design may be placed upon the exterior of the building, by attaching the moulds to the planking which gives form to the wall.

More elaborate designs, especially if they are of bold relief, like cornices, and hoods for windows and doors, had better be moulded in detached pieces some days in advance, and hoisted into position when required.

181. All kinds of masonry in thin walls, whether of brick, stone, common concrete, or *béton aggloméré*, are liable to crack from unequal settlement, or from the expansion and contraction due to ordinary changes of temperature. In

houses, such cracks are more to be apprehended at the re-entering angles of the exterior walls, and at the junctions of the exterior and partition walls, than elsewhere. In concrete or *béton* masonry such cracks may be prevented in a great measure, without inconvenience and at a nominal cost, by embedding and incorporating in the work as it progresses, at the angles and junctions referred to, pieces of old scrap-iron of irregular shape, such as bolts, rings, hooks, clamps, wire, etc.

Any masonry of fair quality, constructed in large masses with special reference to inertia, whether to resist the thrusts of earthen embankments, the statical pressure of water, the force of the current in running streams, or for any other purpose, possesses a degree of ultimate strength much greater than the usual factor of safety would require, and largely in excess of any strain that it would ever have to sustain. This excess of strength, or rather the material which confers it, may be readily saved in works built of *béton aggloméré*, by leaving large hollows or voids in the heart of the wall, and filling them up with sand or heavy earth.

Even if the voids remain unfilled, a hollow wall is more stable than a solid one containing the same quantity of material, for the reason that the moments of the forces which confer stability are greater in the former than in the latter.

182. Durability. The densest mortars that can be produced from given materials are the best, and the use of a large amount of water is incompatible with the condition of density.

The best pointing mortar, indeed, is a *béton aggloméré*, answering fully to the description of that material, being prepared with a small proportion of water, and applied by caulking it into the joints. In northern climates it has to sustain the severest tests to which masonry of any description can be exposed; to alternations of cold and heat, moisture and dryness, freezing and thawing.

Béton aggloméré, when the volume of matrix is so adjusted that the voids in the sand are completely filled—say in the proportion generally of one of the matrix to two and a half or three of sand—becomes in process of time as impervious to water as many of the compact natural stones, while its matured strength exceeds that of the best qualities of sandstone, some of the granites, and many of the limestones and marbles.

Chemical tests have shown this *béton* to be practically impervious to water.

This material, therefore, possesses all the characteristic properties of durability, being dense, hard, strong, and homogeneous; and there would appear to be no reason for supposing that it may not, with entire safety, be applied to out-door constructions, even in the most northerly portions of the United States.

It is injured by freezing before it has had time to set. Important works should not, therefore, be executed during the winter in cold climates.

The effect of freezing on newly made *béton* is to detach a thin scale from the exposed surface, producing a rough and unsightly appearance; but the injury does not extend into the mass of the material, unless the frost be very intense.

In monolithic constructions, the plank *coffre* affords sufficient protection to the face surfaces of the work against moderate frost, and, when the temperature ranges generally not much lower than the freezing point during the day, work may be safely carried on, if care be taken to cover over the new material at night. After it has once set, and has had a few hours to harden, neither severe frost, nor alternate freezing and thawing, has any perceptible effect upon it, and, under any and all circumstances, it is much less liable to injury from these causes, and requires fewer precautions for its protection against them, than common hydraulic concrete.

Monolithic constructions in *béton aggloméré* may advantageously be carried on whenever it is not too cold to lay first-class brick masonry.

In Paris and vicinity operations are not generally suspended during the winter, unless the cold be unusually severe for that climate.

Pieces of statuary, and other specimens ornamented with delicate tracery, have been exposed for five consecutive winters to the weather in New York City, without undergoing the slightest perceptible change.

The power possessed by *béton aggloméré* of resisting the solvent action of salts (principally the sulphates of magnesia and soda) and certain gases contained in sea water, rests upon analogy rather than upon proof based upon adequate experience and observation.

Eminent European engineers do not hesitate to use Portland cement concrete, mixed with a comparatively large dose of water, for very important submarine constructions. The matrix of this concrete possesses less density and strength than that of *béton aggloméré*, and if the lime be excluded

from the latter, the induration in the two cases would be due to precisely the same chemical action. The materials are indeed identical in composition under this condition, with the exception that there is an excess of water, and consequently an element of weakness, in the English concrete, which does not attach to the béton. The durability of the latter in sea water, without being much discussed, has been very generally conceded.

Monolithic constructions under water cannot be executed in béton aggloméré, for the reason that the prescribed ramming in thin layers would necessarily have to be omitted, and some other mode of compacting the mixture followed. This material, however, when laid green through water, loses its distinct name and character, as well as its superior strength and hardness, and becomes common béton or concrete, with the coarser ballast omitted. Its use in this form certainly offers no advantages with regard to strength, while in point of economy the usual proportions of matrix, sand and shingle, or broken stone, is preferable.

183. Adherence of Mortar. The force with which mortars in general adhere to other materials, depends on the nature of the material, its texture, and the state of the surface to which the mortar is applied.

184. Mortar adheres most strongly to brick; and more feebly to wood than to any other material. Among stones, its adhesion to limestone is generally greatest; and to basalt and sandstones, least. Among stones of the same class, it adheres generally better to the porous and coarse-grained, than to the compact and fine-grained. Among surfaces, it adheres more strongly to the rough than to the smooth.

185. The adhesion of common mortar to brick and stone, for the first few years, is greater than the cohesion of its own particles. The force with which hydraulic cement adheres to the same materials, is less than that of the cohesion between its own particles; and, from some recent experiments of Colonel Pasley, on this subject, it would seem that hydraulic cement adheres with nearly the same force to polished surfaces of stone as to rough surfaces.

186. From experiments made by Rondelet, on the adhesion of common mortar to stone, it appears that it required a force varying from 15 to 30 pounds on the square inch, applied perpendicular to the plane of the joint, to separate the mortar and stone after six months union; whereas only 5 pounds to the square inch was required to separate the same surfaces, when applied parallel to the plane of the joint.

From experiments made by Colonel Pasley, he concludes that the adhesive force of hydraulic cement to stone, may be taken as high as 125 pounds on the square inch, when the joint has had time to harden throughout; but, he remarks, that as in large joints the exterior part of the joint may have hardened while the interior still remains soft, it is not safe to estimate the adhesive force, in such cases, higher than from 30 to 40 pounds on the square inch.

VI.

MASTICS.

187. The term *Mastic* is generally applied to artificial or natural combinations of bituminous or resinous substances with other ingredients. They are converted to various uses in constructions, either as cements for other materials, or as coatings, to render them impervious to water.

188. **Bituminous Mastic.** The knowledge of this material dates back to an early period; but it is only within, comparatively speaking, a few years that it has come into common use in Europe and this country. The most usual form in which it is now employed, is a combination of mineral tar and powdered bituminous limestone.

189. The localities of each of these substances are very numerous; but they are chiefly brought into the market from several places in Switzerland and France, where these minerals are found in great abundance; the most noted being Val-de-Travers in Switzerland, and Seyssel in France.

190. The mineral tar is usually obtained by boiling in water a soft sandstone, called by the French *molasse*, which is strongly impregnated with the tar. In this process, the tar is disengaged and rises to the surface of the water, or adheres to the sides of the vessel, and the earthy matter remains at the bottom. An analysis of a rich specimen of the Seyssel bituminous sandstone gave the following results:—

Bituminous oil.....	.086	} Bitumen.....	
Carbon.....	.020		.106
Quartz grains.....			.690
Calcareous grains.....			.204
			1.000

191. The bituminous limestone which, when reduced to a powdered state, is mixed with the mineral tar, is known at the localities mentioned by the name of *asphaltum*, an appellation which is now usually given to the mastic. This limestone occurs in the secondary formations, and is found to contain various proportions of bitumen, varying mostly from 3 to 15 per cent., with the other ordinary minerals, as argile, etc., which are met with in this formation.

192. The clay contained in asphaltic rock, as it is not impregnated, like the carbonate of lime, with the bitumen, is hurtful, causing, at times, the cracks seen in asphaltic pavements.

Some rocks contain an oily element, like petroleum, which, rendering the mastic made from them too fat, must first be distilled out.

193. The bituminous mastic is prepared from these two materials by heating the mineral tar in cast-iron or sheet-iron boilers, and stirring in the proper proportion of the powdered limestone. This operation, although very simple in its kind, requires great attention and skill on the part of the workmen in managing the fire, as the mastic may be injured by too low, or too high a degree of heat. The best plan appears to be, to apply a brisk fire until the boiling liquid commences to give out a thin whitish vapor. The fire is then moderated and kept at a uniform state, and the powdered stone is gradually added, and mixed in with the tar by stirring the two well together. When the temperature has been raised too high, the heated mass gives out a yellowish or brownish vapor. In this state it should be stirred rapidly, and be removed at once from the fire.

194. The asphaltic stone may be reduced to powder, either by roasting it in vessels over a fire, or by grinding it down in the ordinary mortar-mill. For roasting, the stone is first reduced to fragments the size of an egg. These fragments are put into an iron vessel; heat is applied, and the stone is reduced to powder by stirring it and breaking it up with an iron instrument. This process is not only less economical than grinding, but the material loses a portion of its tar from evaporation, besides being liable to injury from too great a degree of heat. For grinding, the stone is first broken as for roasting. Care should be taken, during the process, to stir the mass frequently, otherwise it may form into a cake. Cold dry weather is the best season for this operation; the stone, however, should not be exposed to the weather.

195. Owing to the variable quantity of mineral tar in

bituminous limestone, the best proportions of the tar and powdered stone for bituminous mastic cannot be assigned beforehand. Three or four per cent. too much of tar is said to impair both the durability and tenacity of the mastic; while too small a quantity is equally prejudicial. Generally, from eight to ten per cent. of the tar, by weight, has been found to yield a favorable result.

196. Mastics have been formed by mixing vegetable tar, pitch, and other resinous substances, with litharge, powdered brick, powdered limestone, etc.; but the results obtained have generally been inferior to those from bituminous mastic.

197. Mineral tar is more durable than vegetable tar, and on this account it has been used alone as a coating for other materials, but not with the same success as mastic. Employed in this way the tar in time becomes dry and peels off; whereas, in the form of mastic, the hard matter with which it is mixed prevents the evaporation of the oily portion of the tar, and thus promotes its durability.

198. The uses to which bituminous mastic is applied are daily increasing. It has been used for paving in a variety of forms either as a cement for large blocks of stone, or as the *matrix* of a concrete formed of small fragments of stone or gravel; as a pointing, it is found to be more serviceable, for some purposes, than hydraulic cement; it forms one of the best water-tight coatings for cisterns, cellars, the cappings of arches, terraces, and other similar roofings now in use; and is a good preservative agent for wood-work exposed to wet or damp.

VII.

BRICK.

199. This material is properly an artificial stone, formed by submitting common clay, which has undergone suitable preparation, to a temperature sufficient to convert it into a semi-vitrified state.

Brick may be used for nearly all the purposes to which stone is applicable; for when carefully made, its strength, hardness, and durability, are but little inferior to the more ordinary kinds of building stone. It remains unchanged under the extremes of temperature; resists the action of water; sets firmly

and promptly with mortar; and being both cheaper and lighter than stone, is preferable to it for many kinds of structures, as arches, the walls of houses, &c.

200. The art of brick-making is a distinct branch of the useful arts, and does not properly belong to that of the engineer. But as the engineer may at times be obliged to prepare this material himself, the following outline of the process may prove of service.

201. The best brick earth is composed of a mixture of pure clay and sand, deprived of pebbles of every kind, but particularly of those which contain lime, and pyritous or other metallic substances; as these substances, when in large quantities, and in the form of pebbles, act as fluxes, and destroy the shape of the brick, and weaken it by causing cavities and cracks; but in small quantities, and equally diffused throughout the earth, they assist the vitrification, and give it a more uniform character.

202. Good brick earth is frequently found in a natural state, and requires no other preparation for the purposes of the brick-maker. When he is obliged to prepare the earth by mixing the pure clay and sand, direct experiments should in all cases be made, to ascertain the proper proportions of the two. If the clay is in excess, the temperature required to semi-vitrify it will cause it to warp, shrink, and crack; and if there is an excess of sand, complete vitrification will ensue, under similar circumstances.

203. The quality of the brick depends as much on the care bestowed on its manufacture, as on the quality of the earth. The first stage of the process is to free the earth from pebbles, which is most effectually done by digging it out early in the autumn, and exposing it in small heaps to the weather during the winter. In the spring the heaps are carefully riddled, if necessary, and the earth is then in a proper state to be kneaded or tempered. The quantity of water required in tempering will depend on the quality of the earth; no more should be used than will be sufficient to make the earth so plastic as to admit of its being easily moulded by the workman. About half a cubic foot of water to one of the earth is, in most cases, a good proportion. If too much water be used, the brick will not only be very slow in drying, but it will, in most cases, crack, owing to the surface becoming completely dry before the moisture of the interior has had time to escape; the consequence of which will be, that the brick, when burnt, will be either entirely unfit for use, or very weak.

204. Machinery is now coming into very general use in moulding brick: it is superior to manual labor, not only from the labor saved, but from its yielding a better quality of brick, by giving it great density, which adds to its strength.

205. Great attention is requisite in drying the brick before it is burned. It should be placed, for this purpose, in a dry exposure, and be sheltered from the direct action of the wind and sun, in order that the moisture may be carried off slowly and uniformly from the entire surface. When this precaution is not taken, the brick will generally crack from the unequal shrinking, arising from one part drying more rapidly than the rest.

206. The burning and cooling should be done with equal care. A very moderate fire should be applied under the arches of the kiln for about twenty-four hours, to expel any remaining moisture from the raw brick; this is known to be completely effected when the smoke from the kiln is no longer black. The fire is then increased until the bricks of the arches attain a white heat; it is then allowed to abate in some degree, in order to prevent complete vitrification; and it is alternately raised and lowered in this way until the burning is complete, which may be ascertained by examining the bricks at the top of the kiln. The cooling should be slowly effected; otherwise the bricks will not withstand the effects of the weather. It is done by closing the mouths of the arches, and the top and sides of the kiln, in the most effectual manner with moist clay and burnt brick, and allowing the kiln to remain in this state until the warmth has subsided.

207. Brick of a good quality exhibits a fine, compact, uniform texture, when broken across; gives a clear, ringing sound, when struck; and is of a cherry red, or brownish color. Three varieties are found in the kiln: those which form the arches, denominated *arch brick*, are always vitrified in part, and present a grayish glassy appearance at one end; they are very hard, but brittle, of inferior strength, and set badly with mortar; those from the interior of the kiln, usually denominated *body, hard, or cherry brick*, are of the best quality; those from near the top and sides are generally underburnt, and are denominated *soft, pale, or sammel brick*; they have neither sufficient strength nor durability for heavy masonry, nor the outside courses of walls which are exposed to the weather.

208. The quality of good brick may be improved by soak-

ing it for some days in water, and re-burning it. This process increases both the strength and durability, and renders the brick more suitable for hydraulic constructions, as it is found not to imbibe water so readily after having undergone it.

209. The size and form of bricks present but trifling variations. They are generally rectangular parallelepipeds, from eight to nine inches long, from four to four and a half wide, and from two to two and a quarter thick. Thin brick is generally of a better quality than thick, because it can be dried and burned more uniformly.

210. Fire-brick. This material is used for the facing of furnaces, fireplaces, &c., where a high degree of temperature is to be sustained. It is made of a very refractory kind of pure clay, that remains unchanged by a degree of heat which would vitrify and completely destroy ordinary brick. A very remarkable brick of this character has been made of *agarie mineral*; it remains unchanged under the highest temperature, is one of the worst conductors of heat, and so light that it will float on water.

211. Tiles. As a roof-covering, tiles are in many respects superior to slate, or metallic coverings. They are strong and durable, and are very suitable for the covering of arches, as their great weight is not so objectionable here as in the case of roofs formed of frames of timber.

Tiles should be made of the best potter's clay, and be moulded with great care, to give them the greatest density and strength. They are of very variable form and size; the worst being the flat square form, as, from the liability of the clay to warp in burning, they do not make a perfectly water-tight covering.

VIII.

WOOD.

212. This material holds the next rank to stone, owing to its durability and strength, and the very general use made of it in constructions. To suit it to the purposes of the engineer, the tree is felled after having attained its mature growth, and the trunk, the larger branches that spring from the trunk, and the main parts of the root, are cut into suita-

ble dimensions and seasoned, in which state the term *timber* is applied to it. The crooked, or *compass* timber of the branches and roots is mostly applied to the purposes of ship-building—for the knees and other parts of the frame-work of vessels requiring crooked timber. The trunk furnishes all the straight timber.

213. Trunk. The trunk of a full-grown tree presents three distinct parts: the *bark*, which forms the exterior coating; the *sap-wood*, which is next to the bark; the *heart*, or inner part, which is easily distinguishable from the sap-wood by its greater firmness and darker color.

214. The heart forms the essential part of the trunk, as a building material. The sap-wood possesses but little strength and is subject to rapid decay, owing to the great quantity of fermentable matter contained in it; and the bark is not only without strength, but, if suffered to remain on the tree after it is felled, it hastens the decay of the sap-wood and heart.

215. Felling. Trees should not be felled for timber until they have attained their mature growth, nor after they exhibit symptoms of decline; otherwise, the timber will be less strong, and far less durable. Most forest trees arrive at maturity between fifty and one hundred years, and commence to decline after one hundred and fifty or two hundred years. The age of the tree can, in most cases, be ascertained either by its external appearances, or by cutting into the centre of the trunk, and counting the rings, or layers, of the sap and heart, as a new ring is formed each year in the process of vegetation. When the tree commences to decline, the extremities of the old branches, and particularly the top, exhibit signs of decay.

216. Trees should not be felled while the sap is in circulation; for this substance is of a peculiarly fermentable nature, and therefore very productive of destruction to the wood. The winter months, and July, are the seasons in which trees are felled for timber, as the sap is generally considered as dormant during these months. This practice, however, is in part condemned by some writers; and the recent experiments of M. Boucherie, in France, support this opinion, and indicate midsummer and autumn as the seasons in which the sap is least active, and therefore as most favorable for felling.

217. Girdling and Barking. As the sap-wood, in most trees, forms a large portion of the trunk, experiments have been made for the purpose of improving its strength and durability. These experiments have been mostly directed towards the manner of preparing the tree before felling it.

One method consists in *girdling*, or making an incision with an axe around the trunk, completely through the sap-wood, and suffering the tree to stand in this state until it is dead; the other consists in *barking*, or stripping the entire trunk of its bark, without wounding the sap-wood, early in the spring, and allowing the tree to stand until the new leaves have put forth and fallen before it is felled. The sap-wood of trees, treated by both of these methods, was found very much improved in hardness, strength, and durability; the results from girdling were, however, inferior to those from barking.

218. Methods of Seasoning. The seasoning of timber is of the greatest importance, not only to its durability, but to the solidity of the structure for which it may be used; as a very slight shrinking of some of the pieces, arising from the seasoning of the wood, might, in many cases, cause material injury, if not complete destruction to the structure. Timber is considered as sufficiently seasoned, for the purposes of framework, when it has lost about one-fifth of the weight which it has in a green state. Several methods are in use for seasoning timber: they consist either in an exposure to the air for a certain period in a sheltered position, which is termed *natural seasoning*; in immersion in water, termed *water seasoning*; or in boiling, or *steaming*.

219. For natural seasoning, it is usually recommended to strip the trunk of its branches and bark immediately upon felling, and to remove it to some dry position, until it can be sawed into suitable scantling. From the experiments of M. Boucherie, just cited, it would seem that better results would ensue from allowing the branches and bark to remain on the trunk for some days after felling. In this state, the vital action of the tree continuing in operation, the sap-vessels will be gradually exhausted of sap and filled with air, and the trunk thus better prepared for the process of seasoning. To complete the seasoning, the sawed timber should be piled under drying-sheds, where it will be freely exposed to the circulation of the air, but sheltered from the direct action of the wind, rain, and sun. By taking these precautions, an equable evaporation of the moisture will take place over the entire surface, which will prevent either warping or splitting, which necessarily ensues when one part dries more rapidly than another. It is further recommended, instead of piling the pieces on each other in a horizontal position, that they be laid on cast-iron supports properly prepared, and with a sufficient inclination to facilitate the dripping of the sap from one end; and that heavy round timber be bored through the centre, to

expose a greater surface to the air, as it has been found that it cracks more in seasoning than square timber.

Natural seasoning is preferable to any other, as timber seasoned in this way is both stronger and more durable than when prepared by any artificial process. Most timber will require, on an average, about two years to become fully seasoned in the natural way.

220. The process of seasoning by immersion in water is slow and imperfect, as it takes years to saturate heavy timber; and the soluble matter is discharged very slowly, and chiefly from the exterior layers of the immersed wood. The practice of keeping timber in water, with a view to facilitate its seasoning, has been condemned as of doubtful utility; particularly immersion in salt water, where the timber is liable to the inroads of those two very destructive inhabitants of our waters, the *Limnoria Terebrans* and *Teredo Navalis*; the former of which rapidly destroys the heaviest logs, by gradually eating in between the annual rings; and the latter, the well-known *ship-worm*, by converting timber into a perfect honey-comb state by its numerous perforations.

221. Steaming is mostly in use for ship-building, where it is necessary to soften the fibres, for the purpose of bending large pieces of timber. This is effected by placing the timber in strong steam-tight cylinders, where it is subjected to the action of steam long enough for the object in view; the period usually allowed is one hour to each inch in thickness. Steaming slightly impairs the strength of timber, but renders it less subject to decay, and less liable to warp and crack.

222. When timber is used for posts partly embedded in the ground, it is usual to char the part embedded, to preserve it from decay. This method is only serviceable when the timber has been previously well seasoned; but for green timber it is highly injurious, as by closing the pores it prevents the evaporation from the surface, and thus causes fermentation and rapid decay within.

223. The most durable timber is procured from trees of a close, compact texture, which, on analysis, yield the largest quantity of carbon. And those which grow in moist and shady localities furnish timber which is weaker and less durable than that from trees growing in a dry, open exposure.

224. **Defects of Timber.** Timber is subject to defects, arising either from some peculiarity in the growth of the tree, or from the effects of the weather. Straight-grained timber, free from knots, is superior in strength and quality as a building material to that which is the reverse.

225. The action of high winds, or of severe frosts, injures the tree while standing: the former separating the layers from each other, forming what is denominated *rolled timber*; the latter cracking the timber in several places, from the surface to the centre. These defects, as well as those arising from worms, or age, are easily seen by examining a cross section of the trunk.

226. **Wet and Dry Rot.** The *wet* and *dry rot* are the most serious causes of the decay of timber; as all the remedies thus far proposed to prevent them are too expensive to admit of a very general application. Both of these causes have the same origin: fermentation, and consequent putrefaction. The wet rot takes place in wood exposed, alternately, to moisture and dryness; and the dry rot is occasioned by want of a free circulation of air, as in confined warm localities, like cellars and the more confined parts of vessels.

Trees of rapid growth, which contain a large portion of sap-wood, and timber of every description, when used green, where there is a want of a free circulation of air, decay very rapidly with the rot.

227. **Preservation of Timber.** Numberless experiments have been made on the preservation of timber, and many processes for this purpose have been patented, both in Europe and this country. Several of these processes have yielded the most satisfactory results; and nearly all have proved more or less efficacious. The means mostly resorted to have been the saturation of the timber in the solution of some salt with a metallic or earthy base, thus forming an insoluble compound with the soluble matter of the timber. The salts which have been most generally tried are, the sulphate of iron or copper, and the chloride of mercury, zinc, or calcium. The results obtained from the chlorides have been more satisfactory than those from the sulphates; the latter class of salts with metallic bases possess undoubted antiseptic properties; but it is stated that the freed sulphuric acid, arising from the chemical action of the salt on the wood, impairs the woody fibre, and changes it into a substance resembling carbon.

228. The processes which have come into most general use are those of Mr. Kyan and of Sir W. Burnett, called after the patentees *kyanizing* and *burnetizing*. Kyan's process is to saturate the timber with a solution of chloride of mercury; using for the solution one pound of the salt to five gallons of water. Burnett uses a solution of chloride of zinc, in the proportion of one pound of the salt to ten gallons of water, for

common purposes; and a more highly concentrated solution when the object is also to render the wood incombustible.

229. As timber under the ordinary circumstances of immersion imbibes the solutions very slowly, a more expeditious, as well as more perfect means of saturation has been used of late, which consists in placing the wood to be prepared in strong wrought-iron cylinders, lined with felt and boards, to protect the iron from the action of the solution, where, first by exhausting the cylinders of air, and then applying a strong pressure by means of a force-pump; the liquid is forced into the sap and air vessels, and penetrates to the very centre of the timber.

230. Among the patented processes in our country, that of Mr. Earle has received most notice. This consists in boiling the timber in a solution of the sulphates of copper and iron. Opinion seems to be divided as to the efficacy of this method. It has been tried for the preservation of timber for artillery carriages, but not with satisfactory results.

231. M. Boucherie, to whose able researches on this subject reference has been made, noticing the slowness with which aqueous solutions were imbibed by wood, when simply immersed in them, conceived the ingenious idea of rendering the vital action of the sap-vessels subservient to a thorough impregnation of every part of the trunk where there was this vitality. To effect this, he first immersed the butt-end of a freshly-felled tree in a liquid, and found that it was diffused throughout all parts of the tree in a few days, by the action in question. But, finding it difficult to manage trees of some size when felled, M. Boucherie next attempted to saturate them before felling; for which purpose he bored an auger-hole through the trunk, and made a saw-cut from the auger-hole outwards, on each side, to within a few inches of the exterior, leaving enough of the fibres untouched to support the tree. One end of the auger-hole was then stopped, as well as all of the saw-cut on the exterior, and the liquid was introduced by a tube inserted into the open end of the auger-hole. This method was found equally efficacious with the first, and more convenient.

232. After examining the action of the various neutral salts on the soluble matter contained in wood, M. Boucherie was led to try the impure pyrolignite of iron, both from its chemical composition and its cheapness. The results of this experiment were perfectly satisfactory. The pyrolignite of iron; in the proportion of one-fiftieth in weight of the green

wood, was found not only to preserve the wood from decay, but to harden it to a very high degree.

233. Observing that the pliability and elasticity of wood depended, in a great measure, on the moisture contained in it, M. Boucherie next directed his attention to the means of improving these properties. For this purpose he tried solutions of various deliquescent salts, which were found to answer the end proposed. Among these solutions he gives the preference to that of chloride of calcium, which also, when concentrated, renders the wood incombustible. He also recommends for like purposes the mother-water of salt-marshes, as cheaper than the solution of the chloride of calcium. Timber prepared in this way is not only improved in elasticity and pliability, but is prevented from warping and cracking; the timber, however, is subject to greater variations in weight than when seasoned naturally.

234. M. Boucherie is of opinion that the earthy chlorides will also act as preservatives, but to insure this he recommends that they be mixed with one-fifth of pyrolignite of iron.

235. From other experiments of M. Boucherie, it appears that the sap may be expelled from any freshly-felled timber by the pressure of a liquid, and the timber be impregnated as thoroughly as by the preceding processes. To effect this, the piece to be saturated is placed in an upright position, so that the sap may flow readily from the lower end; a water-tight bag, containing the liquid, is affixed to the upper extremity, which is surmounted by the liquid, the pressure from which expels the sap, and fills the sap-vessels with the liquid. The process is complete when the liquid is found to issue in a pure state from the lower end of the stick.

237. Either of the above processes may be applied in impregnating timber with coloring matter for ornamental purposes. The plan recommended by M. Boucherie consists in introducing separately the solutions by the chemical union of which the color is to be formed.

238. The rapid decay of railroad sleepers has led to more recent experiments in Europe, where timber is scarce and dear. Opinion now is in favor of impregnating them with creosote, as the best preservative from wet rot.

239. The effect of time on the durability of timber, prepared by any of the various chemical processes which have just been detailed, remains to be seen; although results of the most satisfactory nature may be looked for, considering the severe tests to which most of them have been submitted,

by exposure in situations peculiarly favorable to the destruction of ligneous substances.

240. Durability of Timber. The durability of timber, when not prepared by any of the above-mentioned processes, varies greatly under different circumstances of exposure. If placed in a sheltered position, and exposed to a free circulation of air, timber will last for centuries, without showing any sensible changes in its physical properties. An equal, if not superior, durability is observed when it is immersed in fresh water, or embedded in thick walls, or underground, so as to be beyond the influence of atmospheric changes.

241. In salt water, however, particularly in warm climates, timber is rapidly destroyed by the two animals already noticed: the one, the *limnoria terebrans*, attacking, it is said, only stationary wood, while the attacks of the other, the *teredo navalis*, are general. Various means have been tried to guard against the ravages of these destructive agents; that of sheathing exposed timber with copper, or with a coating of hydraulic cement, affixed to the wood by studding it thickly over with broad-headed nails to give a hold to the cement, has met with full success; but the oxidation of the metal, and the liability to accident of the cement, limit their efficacy to cases where they can be renewed. The chemical processes for preserving timber from decay do not appear to guard them in salt water. A process, however, of preserving timber by impregnating it with coal tar, patented in this country by Professor Renwick, appears, from careful experiments, also to be efficacious against the attack of the ship-worm. A coating of Jeffery's marine glue, when impregnated with some of the insoluble mineral poisons destructive to animal life, is said to subserve the same end.

242. The best seasoned timber will not withstand the effects of exposure to the weather for a much greater period than twenty-five years, unless it is protected by a coating of paint or pitch, or of oil laid on hot, when the timber is partly charred over a light blaze. These substances themselves, being of a perishable nature, require to be renewed from time to time, and will, therefore, be serviceable only in situations which admit of their renewal. They are, moreover, more hurtful than serviceable to unseasoned timber, as by closing the pores of the exterior surface they prevent the moisture from escaping from within, and therefore promote one of the chief causes of decay.

243. Forest Trees of the United States. The forests of our own country produce a great variety of the best timber for

every purpose, and supply abundantly both our own and foreign markets. The following genera are in most common use.

244. *Oak*. About forty-four species of this tree are enumerated by botanists, as found in our forests and those of Mexico. The most of them afford a good building material, except the varieties of red oak, the timber of which is weak and decays rapidly.

The White Oak (*Quercus Alba*), so named from the color of its bark, is among the most valuable of the species, and is in very general use, but is mostly reserved for naval constructions; its trunk, which is large, serving for heavy frame-work, and the roots and larger branches affording the best compass timber. The wood is strong and durable, and of a slightly reddish tinge; it is not suitable for boards, as it shrinks about $\frac{1}{3}\frac{1}{2}$ in seasoning, and is very subject to warp and crack.

This tree is found most abundantly in the Middle States. It is seldom seen, in comparison with other forest trees, in the Eastern and Southern States, or in the rich valleys of the Western States.

Post Oak (*Quercus Obtusiloba*). This tree seldom attains a greater diameter than about fifteen inches, and on this account is mostly used for posts, from which use it takes its name. The wood has a yellowish hue, and close grain; is said to exceed white oak in strength and durability; and is therefore an excellent building material for the lighter kinds of frame-work. This tree is found most abundantly in the forests of Maryland and Virginia, and is there frequently called *Box White Oak*, and *Iron Oak*. It also grows in the forests of the Southern and Western States, but is rarely seen farther north than the mouth of the Hudson River.

Chestnut White Oak (*Quercus Prinus Palustris*). The timber of this tree is strong and durable, but inferior to the two preceding species. The tree is abundant from North Carolina to Florida.

Rock Chestnut Oak, (*Quercus Prinus Monticola*.) The timber of this tree is mostly in use for naval constructions, for which it is esteemed inferior only to the white oak. The tree is found in the Middle States, and as far north as Vermont.

Live Oak (*Quercus Virens*). The wood of this tree is of a yellowish tinge; it is heavy, compact, and of a fine grain; it is stronger and more durable than any other species, and on this account it is considered invaluable for the purposes of ship-building, for which it is exclusively reserved.

The live oak is not found farther north than the neighborhood of Norfolk, Virginia, nor farther inland than from fifteen to twenty miles from the seacoast. It is found in abundance along the coast south, and in the adjacent islands as far as the mouth of the Mississippi.

245. *Pine*. This very interesting genus is considered inferior only to the oak, from the excellent timber afforded by nearly all of its species. It is regarded as a most valuable building material, owing to its strength and durability, the straightness of its fibre, the ease with which it is wrought, and its applicability to all the purposes of constructions in wood.

Yellow Pine (*Pinus Mitis*). The heart-wood of this tree is fine-grained, moderately resinous, strong and durable; but the sap-wood is very inferior, decaying rapidly on exposure to the weather. The timber is in very general use for framework, &c.

This tree is found throughout our country, but in the greatest abundance in the Middle States. In the Southern States it is known as *Spruce Pine* and *Short-leaved Pine*.

Long-leaved Pine, or Southern Pine (*Pinus Australis*). This tree has but little sap-wood, and the resinous matter is uniformly distributed throughout the heart-wood, which presents a fine compact grain, having more hardness, strength, and durability than any other species of the pine, owing to which qualities the timber is in very great demand.

The tree is first met with near Norfolk, Virginia, and from this point south it is abundantly found.

White Pine, or Northern Pine (*Pinus Strobus*). This tree takes its name from the color of its wood, which is white, soft, light, straight-grained, and durable. It is inferior in strength to the species just described, and has, moreover, the defect of swelling in damp weather. Its timber is, however, in great demand as a good building material, being almost the only kind in use in the Eastern and Northern States for the framework and joinery of houses, &c.

The finest specimens of this tree grow in the forests of Maine. It is found in great abundance between the 43d and 47th parallels, N. L.

246. Among the forest trees in less general use than the oak and pine, the *Locust*, the *Chestnut*, the *Red Cedar*, and the *Larch* hold the first place for hardness, strength, and durability. They are chiefly used for the framework of vessels. The chestnut, the locust, and the cedar are preferred to all other trees for posts.

247. The Black or Double Spruce (*Abies Nigra*) also affords an excellent material, its timber being strong, durable, and light.

248. The *Juniper* or *White Cedar*, and the *Cypress* are very celebrated for affording a material which is very light, and of great durability when exposed to the weather; owing to these qualities, it is almost exclusively used for shingles and other exterior coverings. These two trees are found in great abundance in the swamps of the Southern States.

IX.

METALS.

The metals in most common use in constructions are *Iron*, *Copper*, *Zinc*, *Tin*, and *Lead*.

249. **IRON.** This metal is very extensively used for the purposes of the engineer and architect, both in the state of *Cast Iron* and *Wrought Iron*.

250. *Cast Iron* is one of the most valuable building materials, owing to its great strength, hardness, and durability, and the ease with which it can be cast, or moulded, into the best forms, for the purposes to which it is to be applied.

251. Cast iron is divided into two principal varieties: the *Gray cast iron*, and *White cast iron*. There exists a very marked difference between the properties of these two varieties. There are, besides, many intermediate varieties, which partake more or less of the properties of these two, as they approach, in their external appearances, nearer to the one or the other.

252. Gray cast iron, when of a good quality, is slightly malleable in a cold state, and will yield readily to the action of the file, when the hard outside coating is removed. This variety is also sometimes termed soft gray cast iron; it is softer and tougher than the white iron. When broken, the surface of the fracture presents a granular structure; the color is gray; and the lustre is what is termed metallic, resembling small brilliant particles of lead strewed over the surface.

253. White cast iron is very hard and brittle; when recently broken, the surface of the fracture presents a distinctly-

marked crystalline structure; the color is white; and lustre vitreous, or bearing a resemblance to the reflected light from an aggregation of small crystals.

254. Mr. Mallet, in a very able Report made to the British Association for the Advancement of Science, remarking on the great want of uniformity, among manufacturers of iron, in the terms used to describe its different varieties, proposes the following nomenclature, as comprising every variety, with their distinctive characters.

Silvery. Least fusible; thickens rapidly when fluid by a spontaneous puddling; crystals vesicular, often crystalline; incapable of being cut by chisel or file; ultimate cohesion a maximum; elastic range a minimum.

Micaceous. Very soft; greasy feel; peculiar micaceous appearance, generally owing to excess of manganese; soils the fingers strongly; crystals large; runs very fluid; contraction large.

Mottled. Tough and hard; filed or cut with difficulty; crystals large and small mixed; sometimes runs thick; contraction in cooling a maximum.

Bright Gray. Toughness and hardness most suitable for working; ultimate cohesion and elastic range generally are balanced most advantageously; crystals uniform, very minute.

Dull Gray. Less tough than the preceding; other characters alike; contraction in cooling a minimum.

Dark Gray. Most fusible; remains long fluid; exudes graphite in cooling; soils the fingers; crystals large and lamella; ultimate cohesion a minimum, and elastic range a maximum.

255. The gray iron is most suitable where strength is required; and the white, where hardness is the principal requisite.

256. The color and lustre, presented by the surface of a recent fracture, are the best indications of the quality of iron. A uniform dark gray color, and high metallic lustre, are indications of the best and strongest. With the same color, but less lustre, the iron will be found to be softer and weaker, and to crumble readily. Iron without lustre, of a dark and mottled color, is the softest and weakest of the gray varieties.

Iron of a light gray color and high metallic lustre is usually very hard and tenacious. As the color approaches to white, and the metallic lustre changes to vitreous, hardness and brittleness become more marked, until the extremes of a dull, or grayish white color, and a very high vitreous lustre,

are attained, which are the indications of the hardest and most brittle of the white variety.

257. The quality of cast iron may also be tested, by striking a smart stroke with a hammer on the edge of a casting. If the blow produces a slight indentation, without any appearance of fracture, it shows that the iron is slightly malleable, and, therefore, of a good quality; if, on the contrary, the edge is broken, it indicates brittleness in the material, and a consequent want of strength.

258. The strength of cast iron varies with its density; and this element depends upon the temperature of the metal when drawn from the furnace; the rate of cooling; the head of metal under which the casting is made; and the bulk of the casting.

259. The density of iron cast in vertical moulds increases, according to Mr. Mallet's experiments, very rapidly from the top downward, to a depth of about four feet below the top; from this point to the bottom, the rate of increase is very nearly uniform. All other circumstances remaining the same, the density decreases with the bulk of the casting; hence large are proportionally weaker than small castings.

260. From all of these causes, by which the strength of iron may be influenced, it is very difficult to judge of the quality of a casting by its external characters; in general, however, if the exterior presents a uniform appearance, devoid of marked inequalities of surface, it will be an indication of uniform strength.

261. The economy in the manufacture of cast iron, arising from the use of the hot blast, has naturally directed attention to the comparative merits between iron produced by this process and that from the cold blast. This subject has been ably investigated by Messrs. Fairbairn and Hodgkinson, and their results published in the *Seventh Report of the British Association*.

Mr. Hodgkinson remarks on this subject, in reference to the results of his experiments: "It is rendered exceedingly probable that the introduction of a heated blast into the manufacture of cast iron, has injured the softer irons, while it has frequently mollified and improved those of a harder nature; and considering the small deterioration that" some "irons have sustained, and the apparent benefit to those of" others, "together with the great saving effected by the heated blast, there seems good reason for the process becoming as general as it has done."

262. From a number of specific gravities given in these

Reports, the mean specific gravity of cold blast iron is nearly 7.091, that of hot blast, 7.021.

263. Mr. Fairbairn concludes his Report with these observations, as the results of the investigations of himself and Mr. Hodgkinson: "The ultimatum of our inquiries, made in this way, stands, therefore, in the ratio of strength, 1000 for the cold blast, to 1024.8 for the hot blast; leaving the small fractional difference of 24.8 in favor of the hot blast."

"The relative powers to sustain impact, are likewise in favor of the hot blast, being in the ratio of 1000 to 1226.3."

264. **Wrought Iron.** The color, lustre, and texture of a recent fracture, present, also, the most certain indications of the quality of wrought iron. The fracture submitted to examination, should be of bars at least one inch square; or, if of flat bars, they should be at least half an inch thick; otherwise, the texture will be so greatly changed, arising from the greater elongation of the fibres, in bars of smaller dimensions, as to present none of those distinctive differences observable in the fracture of large bars.

265. The surface of a recent fracture of good iron, presents a clear gray color, and high metallic lustre; the texture is granular, and the grains have an elongated shape, and are pointed and slightly crooked at their ends, giving the idea of a powerful force having been employed to produce the fracture. When a bar, presenting these appearances, is hammered, or drawn out into small bars, the surface of fracture of these bars will have a very marked fibrous appearance, the filaments being of a white color and very elongated.

266. When the texture is either laminated, or crystalline, it is an indication of some defect in the metal, arising either from the mixture of foreign ingredients, or else from some neglect in the process of forging.

267. **Burnt iron** is of a clear gray color, with a slight shade of blue, and of a slaty texture. It is soft and brittle.

268. **Cold short iron**, or iron that cannot be hammered when cold without breaking, presents nearly the same appearance as burnt iron, but its color inclines to white. It is very hard and brittle.

269. **Hot short iron**, or that which breaks under the hammer when heated, is of a dark color without lustre. This defect is usually indicated in the bar by numerous cracks on the edges.

270. The fibrous texture, which is developed only in small bars by hammering, is an inherent quality of good iron; those varieties which are not susceptible of receiving this pe-

cular texture, are of an inferior quality, and should never be used for purposes requiring great strength: the filaments of bad varieties are short, and the fracture is of a deep color, between lead gray and dark gray.

271. The best wrought iron presents two varieties; the *Hard* and *Soft*. The hard variety is very strong and ductile. It preserves its granular texture a long time under the action of the hammer, and only develops the fibrous texture when beaten, or drawn out into small rods: its filaments then present a silver-white appearance.

272. The soft variety is weaker than the hard; it yields easily to the hammer; and it commences to exhibit, under its action, the fibrous texture in tolerably large bars. The color of the fibres is between a silver white and light gray.

273. Iron may be naturally of a good quality, and still, from being badly refined, not present the appearances which are regarded as sure indications of its excellence. Among the defects arising from this cause are *blisters*, *flaws*, and *cinder-holes*. Generally, however, if the surface of fracture presents a texture partly crystalline and partly fibrous, or a fine granular texture, in which some of the grains seem pointed and crooked at the points, together with a light gray color without lustre, it will indicate natural good qualities, which require only careful refining to be fully developed.

274. The strength of wrought iron is very variable, as it depends not only on the natural qualities of the metal, but also upon the care bestowed in forging, and the greater or less compression of its fibres, when drawn or hammered into bars of different sizes.

275. In the Report made by the sub-committee, Messrs. Johnson and Reeves, on the strength of Boiler Iron (*Journal of Franklin Institute*, vol. 20, *New Series*), it is stated that the following order of superiority obtains among the different kinds of pig metal, with respect to the malleable iron which they furnish:—1 *Lively gray*; 2 *White*; 3 *Mottled gray*; 4 *Dead gray*; 5 *Mixed metals*.

The Report states, "So far as these experiments may be considered decisive of the question, they favor the lighter complexion of the cast metal, in preference to the darker and mottled varieties; and they place the mixture of different sorts among the worst modifications of the material to be used, where the object is mere tenacity."

276. These experiments also show that piling iron of different degrees of fineness in the same plate is injurious to its quality, owing to the consequent inequality of the welding.

277. From these experiments, the mean specific gravity of boiler iron is 7.7344, and of bar iron, 7.7254.

278. **Durability of Iron.** The durability of iron, under the different circumstances of exposure to which it may be submitted, depends on the manner in which the casting may have been made; the bulk of the piece employed; the more or less homogeneousness of the mass; its density and hardness.

279. Among the most recent and able researches upon the action of the ordinary corrosive agents on iron, and the preservative means to be employed against them, those of Mr. Mallet, given in the Report already mentioned, hold the first rank. A brief recapitulation of the most prominent conclusions at which he has arrived, is all that can be attempted in this place.

280. When iron is only partly immersed in water, or wholly immersed in water composed of strata of different densities, like that of tidal rivers, a voltaic pile of one solid and two fluid bodies is formed, which causes a more rapid corrosion than when the liquid is of uniform density.

281. The corrosive action of the foul sea water of docks and harbors is far more powerful than that of clear sea or fresh water, owing to the action of the hydro-sulphuric acid which, being disengaged from the mud, impregnates the water, and acts on the iron.

282. In clear fresh river water, the corrosive action is less than under any other circumstances of immersion; owing to the absence of corrosive agents, and the firm adherence of the oxide formed, which presents a hard coat that is not washed off as in sea water.

283. In clear sea water, the rate of corrosion of iron bars, one inch thick, is from 3 to 4 tenths of an inch for cast iron in a century, and about 6 tenths of an inch for wrought iron.

284. Wrought iron corrodes more rapidly in hot sea water than under any other circumstances of immersion.

285. The same iron when chill cast corrodes more rapidly than when cast in green sand; this arises from the chilled surface being less uniform, and therefore forming voltaic couples of iron of different densities, by which the rapidity of corrosion is increased.

286. Castings made in dry sand and loam are more durable under water than those made in green sand.

287. Thin bars of iron corrode more rapidly than those of more bulk. This difference in the rate of corrosion is more

striking in the soft, or *graphitic* specimens of cast iron, than in the hard and silvery. It is caused by the more rapid rate of cooling in thin than in thick bars, by which the density of the surface of the former becomes less uniform. These causes of destructibility may, in some degree, be obviated in castings composed of ribbed pieces, by making the ribs of equal thickness with the main pieces, and causing them to be cooled in the sand, before stripping the moulds.

288. The hard crust of cast iron promotes its durability; when this is removed to the depth of one-fourth of an inch, the iron corrodes more rapidly in both air and water.

289. Corrosion takes place the less rapidly in any variety of iron, in proportion as it is more homogeneous, denser, harder, and closer grained, and the less graphitic.

290. **Preservatives of Iron.**—The more ordinary means used to protect iron against the action of corrosive agents, consist of paints and varnishes. These, under the usual circumstances of atmospheric exposure are of but slight efficacy, and require to be frequently renewed. In water, they are all rapidly destroyed, with the exception of boiled coal-tar, which when laid on hot iron, leaves a bright and solid varnish of considerable durability and protective power.

291. The rapidly increasing purposes to which iron has been applied, within the last few years, has led to researches upon the agency of *electro-chemical* action, as a means of protecting it from corrosion, both in air and water. Among the processes resorted to for this purpose, that of *zinking*, or as it is more commonly known, *galvanizing* iron has been most generally introduced. The experiments of Mr. Mallet, on this process, are decidedly against zinc as a permanent electro-chemical protector. Mr. Mallet states, as the result of his observations, that zinc applied in fusion, in the ordinary manner, over the whole surface of iron, will not preserve it longer than about two years; and that, so soon as oxidation commences at any point of the iron, the protective power of the zinc becomes considerably diminished, or even entirely null. Mr. Mallet concludes: "On the whole, it may be affirmed that, under all circumstances, zinc has not yet been so applied to iron, as to rank as an electro-chemical protector towards it in the strict sense; hitherto it has not become a preventive, but merely a more or less effective palliative to destruction."

292. In extending his researches on this subject, with alloys of copper and zinc, and copper and tin, Mr. Mallet found that the alloys of the last metals accelerate the corro-

sion of iron, when voltaically associated with it in sea water; and that an alloy of the two first, represented by $23Zn + 8Cu$, in contact with iron, protects it as fully as zinc alone, and suffers but little loss from the electro-chemical action; thus presenting a protective energy more permanent and invariable than that of zinc, and giving a nearer approximation to the solution of the problem, "to obtain a mode of electro-chemical protection such, that while the iron shall be preserved the protector shall not be acted on, and whose protection shall be invariable."

293. In the course of his experiments, Mr. Mallet ascertained that the softest gray cast iron bears such a voltaic relation to hard bright cast iron, when immersed in sea water and voltaically associated with it, that although oxidation will not be prevented on either, it will still be greatly retarded on the hard, at the expense of the soft iron.

294. In concluding the details of his important researches on this subject, Mr. Mallet makes the following judicious remarks: "The engineer of observant habit will soon have perceived, that in exposed works in iron, equality of section or scantling, in all parts sustaining equal strain, is far from insuring equal passive power of permanent resistance, unless, in addition to a general allowance for loss of substance by corrosion, this latter element be so provided for, that it shall be equally balanced over the whole structure; or, if not, shall be compelled to confine itself to portions of the general structure, which may lose substance with injuring its stability."

"The principles we have already established sufficiently guide us in the modes of effecting this; regard must not only be had to the contact of dissimilar metals, or of the same in dissimilar fluids, but to the scantling of the casting and of its parts, and to the contact of cast iron with wrought iron or steel, or of one sort of cast iron with another. Thus, in a suspension bridge, if the links of the chains be hammered, and the pins rolled, the latter, where equally exposed, will be eaten away long before the former. In marine steam-boilers, the rivets are hardened by hammering until cold; the plates, therefore, are corroded through round the rivets before these have suffered sensibly; and in the air-pumps and condensers of engines working with sea water, or in pit work, and pumps lifting mineralized or 'bad' water from mines, the cast iron perishes first round the holes through which wrought iron bolts, &c., are inserted. And abundant other instances might be given, showing that the effects here spoken of are in prac-

tical operation to an extent that should press the means of counteracting them on the attention of the engineer."

295. Since Mr. Mallet's Report to the British Association, he has invented two processes for the protection of iron from the action of the atmosphere and of water; the one by means of a coating formed of a triple alloy of zinc, mercury, and sodium, or potassium; the other by an amalgam of palladium and mercury.

296. The first process consists of forming an alloy of the metals used, in the following manner. To 1,292 parts of zinc by weight, in a state of fusion, 202 parts of mercury are added, and the metals are well mixed, by stirring with a rod of dry wood, or one of iron coated with clay; sodium, or potassium is next added, in small quantities at a time, in the proportion of one pound to every ton by weight of the other two metals. The iron to be coated with this alloy is first cleared of all adhering oxide, by immersing it in a warm dilute solution of sulphuric, or of hydrochloric acid, washing it in clear cold water, and detaching all scales, by striking it with a hammer; it is then scoured clean by the hand with sand, or emery, under a small stream of water, until a bright metallic lustre is obtained; while still wet, it is immersed in a bath formed of equal parts of the cold saturated solutions of chloride of zinc and sal-ammoniac, to which as much more solid sal ammoniac is added as the solution will take up. The iron is allowed to remain in this bath until it is covered by minute bubbles of gas; it is then taken out, allowed to drain a few seconds, and plunged into the fused alloy, from which it is withdrawn so soon as it has acquired the same temperature. When taken from the metallic bath, the iron should be plunged in cold water and well washed.

297. Care must be taken that the iron be not kept too long in the metallic bath, otherwise it may be fused, owing to the great affinity of the alloy for iron. At the proper fusing temperature of the alloy, about 680° Fahr., it will dissolve plates of iron one-eighth of an inch thick in a few seconds; on this account, whenever small articles of iron have to be protected, the affinity of the alloy for iron should be satisfied, by fusing some iron in it before immersing that to be coated.

298. The other process, which has been termed *palladiumizing*, consists in coating the iron, prepared as in the first process for the reception of the metallic coat, with an amalgam of palladium and mercury.

299. **Corrugated Iron.**—This term is applied to sheet iron prepared by being moulded, and having the plane surface

broken by longitudinal or sectional ridges, for the purpose of giving the sheet great stiffness and strength. Corrugated iron is used principally for roofing, and sometimes in place of brick for forming the arches between the iron beams in fire-proof structures.

300. Steel.—The name *steel* is given to a compound of iron and carbon, in which the amount of iron is usually not less than 97 per cent. Where the amount of carbon is less than .0065, the compound is termed *steely iron*; when more than 1.8 the compound is cast iron.

Steel, like iron, is seldom pure, containing other substances, of which sulphur and silicon are the most common.

The different kinds of steel are named either from the modes of manufacture, or their appearance, or from some constituent, or from some inventor's process. Thus we have natural steels obtained directly from the ores and bearing mostly local names; blistered, shear, tilted and crucible or cast steel; Woolz or Damask steel; Bessemer's and Martin's steel; tungstein, chromium, and titanium steel.

These varieties are obtained by various processes. Thus we have the *puddling process* by which the varieties of natural steel are made; the cementative process; the Martin-Siemens process; the Bessemer process, &c.

The average specific gravity of natural steels is 7.5; of tilted steel 7.9; cast steel 7.8; Bessemer steel from 7.79 to 7.87; chromium steel from 7.81 to 7.85.

The chromium steel is said to possess the greatest tensile strength; and among those more abundantly manufactured the Bessemer still ranks highest in this respect.

COPPER.

301. The most ordinary and useful application of this metal in constructions, is that of sheet copper, which is used for roof coverings, and like purposes. Its durability under the ordinary changes of atmosphere is very great. Sheet copper, when quite thin, is apt to be defective, from cracks arising from the process of drawing it out. These may be remedied, when sheet copper is to be used for a water-tight sheathing, by tinning the sheets on one side. Sheets prepared in this way have been found to be very durable.

The alloys of copper and zinc, known under the name of *brass*, and those of copper and tin, known as *bronze*, *gun-metal*, and *bell-metal*, are, in some cases, substituted for iron, owing

to their superior hardness to copper, and being less readily oxidized than iron.

ZINC.

302. This metal is used mostly in the form of sheets; and for water-tight sheathings it has nearly displaced every other kind of sheet metal. The pure metallic surface of zinc soon becomes covered with a very thin, hard, transparent oxide, which is unchangeable both in air and water, and preserves the metal beneath it from farther oxidation. It is this property of the oxide of zinc, which renders this metal so valuable for sheathing purposes; but its durability is dependent upon its not being brought into contact with iron in the presence of moisture, as the galvanic action which would then ensue, would soon destroy the zinc. On the same account zinc should be perfectly free from the presence of iron, as a very small quantity of the oxide of this last metal, when contained in zinc, is found to occasion its rapid destruction.

Besides the alloys of zinc already mentioned, this metal alloyed with copper forms one of the most useful *solders*; and its alloy with lead has been proposed as a *cramping metal* for uniting the parts of iron work together, or iron work to other materials, in the place of lead, which is usually employed for this purpose, but which accelerates the destruction of iron in contact with it.

TIN.

303. The most useful application of tin is as a coating for sheet iron, or sheet copper: the alloy which it forms, in this way, upon the surfaces of the metals in question, preserves them for some time from oxidation. Alloyed with lead it forms one of the most useful solders.

LEAD.

304. Lead in sheets forms a very good and durable roof covering, but it is inferior to both copper and zinc in tenacity and durability; and is very apt to tear asunder on inclined surfaces, particularly if covered with other materials, as in the case of the capping of water-tight arches.

X.

PAINTS AND VARNISHES.

305. *Paints* are mixtures of certain fixed and volatile oils, chiefly those of linseed and turpentine, with several of the metallic salts and oxides, and other substances which are used either as pigments, or to give what is termed a *body* to the paint, and also to improve its drying properties.

306. Paints are mainly used as protective agents to secure wood and metals from the destructive action of air and water. This they but imperfectly effect, owing to the unstable nature of the oils that enter into their composition, which are not only destroyed by the very agents against which they are used as protectors, but by the chemical changes which result from the action of the elements of the oil upon the metallic salts and oxides.

307. Paints are more durable in air than in water. In the latter element, whether fresh or salt, particularly if foul, paints are soon destroyed by the chemical changes which take place, both from the action of the water upon the oils, and that of the hydrosulphuric acid contained in foul water upon the metallic salts and oxides.

308. However carefully made or applied, paints soon become permeable to water, owing to the very minute pores which arise from the chemical changes in their constituents. These changes will have but little influence upon the preservative action of paints upon wood exposed to the effects of the atmosphere, provided the wood be well seasoned before the paint is applied, and that the latter be renewed at suitable intervals of time. On metals these changes have a very important bearing. The permeability of the paint to moisture causes the surface of the metal under it to rust, and this cause of destruction is, in most cases, promoted by the chemical changes which the paint undergoes.

309. *Varnishes* are solutions of various resinous substances in solvents which possess the property of drying rapidly. They are used for the same purposes as paints, and have generally the same defects.

310. The following are some of the more usual compositions of paints and varnishes.

White Paint (for exposed wood).

White lead, ground in oil	80
Boiled oil	9
Raw oil	9
Spirits turpentine	4

The white lead to be ground in the oil, and the spirits of turpentine added.

Black Paint.

Lamp-black	28
Litharge	1
Japan varnish	1
Linseed oil, boiled	73
Spirits turpentine	1

Lead Color.

White lead, ground in oil	75
Lamp-black	1
Boiled linseed oil	23
Litharge	0.5
Japan varnish	0.5
Spirits turpentine	2.5

Gray, or Stone Color (for buildings).

White lead ground in oil	78
Boiled oil	9.5
Raw oil	9.5
Spirits of turpentine	3
Turkey umber	0.5
Lamp-black	0.25

Lackers for Cast Iron.

1.— Black lead, pulverized	12
Red lead	12
Litharge	5
Lamp-black	5
Linseed oil	66
2.— Anti-corrosion	40 lbs.
Grant's black, ground in oil	4 "
Red lead, as a dryer	3 "
Linseed oil	4 gals.
Spirits turpentine	1 pint.

Copal Varnish.

Gum copal (in clean lumps)	26.5
Boiled linseed oil	42.5
Spirits turpentine	31

Japan Varnish.

Litharge	4
Boiled oil	87
Spirits turpentine	2
Red lead	6
Umber	1
Gum shellac	8
Sugar of lead	2
White vitriol	1

The proportions of the above compositions are given in 100 parts, by weight, with the exception of lacker 2.

The beautiful black polish on the Berlin castings for ornamental purposes, is said to be produced by laying the following composition on the hot iron, and then baking it.

Bitumen of India.....	0.5
Resin.....	0.5
Drying oil.....	1.0
Copal, or amber varnish.....	1.0

Enough oil of turpentine is to be added to this mixture to make it spread.

311. From experiments made by Mr. Mallet, on the preservative properties of paints and varnishes for iron immersed in water, it appears that caoutchouc varnish is the best for iron in hot water, and asphaltum varnish under all other circumstances; but that boiled coal-tar, laid on hot iron, forms a superior coating to either of the foregoing.

312. Varnish for Zincked Iron. Mr. Mallet recommends the following compositions for a paint, termed by him *zoofagous* paint, and a varnish to be used to preserve zincked iron both from corrosion and from fouling in sea water.

To 50 lbs. of foreign asphaltum, melted and boiled in an iron vessel for three or four hours, add 16 lbs. of red lead and litharge ground to a fine powder, in equal proportions, with 10 gals. of drying linseed oil, and bring the whole to a nearly boiling temperature. Melt, in a second vessel, 8 lbs. of gum-animé; to which add 2 gals. of drying linseed oil at a boiling heat, with 12 lbs. of caoutchouc partially dissolved in coal-tar naphtha. Pour the contents of the second vessel into the first, and boil the whole gently, until the varnish, when taken up between two spatulas, is found to be tough and ropy. This composition, when quite cold, is to be thinned down for use with from 30 to 35 gals. of spirits of turpentine, or of coal naphtha.

313. It is recommended that the iron should be heated before receiving this varnish, and that it should be applied with a spatula, or a flexible slip of horn, instead of the ordinary brush.

When dry and hard, it is stated that this varnish is not acted upon by any moderately diluted acid or alkali; and, by long immersion in water, it does not form a partially soluble hydrate, as is the case with purely resinous varnishes and oil paints. It can with difficulty be removed by a sharp-pointed tool; and is so elastic, that a plate of iron covered

with it may be bent several times before it will become detached.

314. Zoofagous Paint. To 100 lbs. of a mixture of drying linseed oil, red lead, sulphate of barytes, and a little spirits of turpentine, add 20 lbs. of the oxychloride of copper, and 3 lbs. of yellow soap and common rosin, in equal proportions, with a little water.

When zincked iron is exposed to the atmosphere alone, the varnish is a sufficient protection for it; but when it is immersed in sea water, and it is desirable, as in iron ships, to prevent it from fouling, by marine plants and animals attaching themselves to it, the paint should be used, on account of its poisonous qualities. The paint is applied over the varnish, and is allowed to harden three or four days before immersion.

315. Methods of Preserving Exposed Surfaces of Stone. Paints and similar means of preservation from the action of the weather have been used on the exposed surfaces of masonry composed of materials that were found not to withstand well this action; besides these, preparations of the alkaline silicates, known as soluble glass, have of late been recommended as of a more durable character for this purpose. These solutions are applied either by syringes or by a brush to the surface of the stone, it having been previously cleansed of all extraneous matter. Three applications on three successive days are said to be sufficient to harden and preserve any stone.

Another mode of effecting the same object has been proposed, which is to use two solutions of mineral substances which, successively applied to the surface of the stone, shall form an insoluble chemical compound. One method proposed is to saturate the stone at the surface with a weak solution of silicate of potash or soda, on which a solution of chloride of calcium or barium is applied. From this an insoluble silicate of lime or barium will be formed in the pores of the stone, which will render it weather-proof.

Like processes have been used for dyeing or coloring stone for certain architectural effects. For this purpose some of the soluble sulphates are used in various combinations, according to the color to be obtained.

CHAPTER II.

316. WHATEVER may be the physical structure of materials, whether fibrous or granular, experiment has shown that they all possess certain general properties, among the most important of which to the engineer are those of *contraction, elongation, deflection, torsion, lateral adhesion, and shearing*, and the resistance which these offer to the forces by which they are called into action.

EXPERIMENTAL RESEARCHES ON THE STRENGTH OF MATERIALS.

- I. GENERAL DEDUCTIONS FROM EXPERIMENTS. II. STRENGTH OF STONE. III. STRENGTH OF MORTARS AND CONCRETES. IV. STRENGTH OF TIMBER. V. STRENGTH OF CAST IRON. VI. STRENGTH OF WROUGHT IRON. VII. STRENGTH OF STEEL. VIII. STRENGTH OF COPPER. IX. STRENGTH OF OTHER MATERIALS. X. LINEAR CONTRACTION AND EXPANSION OF METALS AND OTHER MATERIALS FROM TEMPERATURE. XI. ADHESION OF IRON SPIKES TO TIMBER.

SUMMARY.

I.

GENERAL DEDUCTIONS FROM EXPERIMENTS.

Physical properties of solid bodies and the various experiments to test them (Arts. 316-326).

II.

STRENGTH OF STONE.

Resistance of stone to crushing and transverse strains (Arts. 327-333).
Practical deductions (Art. 334).
Expansion of stone from increase of temperature (Art. 335).

III.

STRENGTH OF MORTARS AND CONCRETES.

Strength of mortars (Arts. 336-340).
Strength and other properties of Portland cement (Art. 341).
Strength of concrete and béton (Art. 342).

IV.

STRENGTH OF TIMBER.

- Resistance to tensile strain (Art. 343).
- Resistance to compressive strain (Art. 344).
- Resistance of square pillars (Art. 345).
- Resistance to transverse strains (Art. 346).
- Resistance to detrusion (Art. 347).

V.

STRENGTH OF CAST IRON.

- Resistance to tensile strain (Art. 348).
- Resistance to compressive strain (Art. 349-354).
- Resistance to transverse strain (Art. 355-361).
- Influence of form upon the strength of cast-iron beams (Art. 362-364).
- Formulas for determining the ultimate strength of cast-iron beams of the above form (Art. 365).
- Effect of horizontal impact upon cast-iron bars (Art. 366-367).

VI.

STRENGTH OF WROUGHT IRON.

- Resistance to tensile strain (Art. 368).
- Resistance to compressive strain (Art. 369-372).
- Resistance of iron wire to impact (Art. 373.)
- Resistance to torsion (Art. 374).

VII.

STRENGTH OF STEEL.

- Strength and other properties of steel (Art. 375).

VIII.

STRENGTH OF COPPER.

- Resistance to tensile and compressive strains (Art. 376-377).

IX.

STRENGTH OF OTHER METALS.

- Strength of cast tin, cast lead, gun-metal, and brass (Art. 378).

X.

- LINEAR CONTRACTION AND EXPANSION OF METALS AND OTHER MATERIALS FROM TEMPERATURE.

XI.

- ADHESION OF IRON SPIKES TO TIMBER.

317. All solid bodies, when submitted to strains by which any of these properties are developed, have, within certain limits, termed the *limits of elasticity*, the property of wholly or partially resuming their original state, when the strain is taken off.

318. To what extent bodies possess the property of total recovery of form, when relieved from a strain, is still a matter of doubt. It has been generally assumed, that the elasticity of a material does not undergo permanent injury by any strain less than about one-third of that which would entirely destroy its force of cohesion, thereby causing rupture. But from the more recent experiments on this point made by Mr. Hodgkinson and others on cast iron, it appears that the restoring power of this material is destroyed by very slight strains; and it is rendered probable that this and most other materials receive a permanent change of form, or *set*, under any strain, however small.

319. The extension, or contraction of a solid, may be effected either by a force acting in the direction in which the contraction or elongation takes place, or by one acting transversely, so as to bend the body. Experiments have been made to ascertain, directly, the proportion between the amount of contraction or elongation, and the forces by which they are produced. From these experiments, it results, that the contractions or elongations are, within certain limits, proportional to the forces, but that an equal amount of contraction, or elongation is not produced by the same amount of force. From the experiments of Mr. Hodgkinson and M. Duleau, it appears that in cast and malleable iron the contraction or elongation caused by the same amount of pressure or tension is nearly equal; while in timber, according to Mr. Hodgkinson, the amount of contraction is about four-fifths of the elongation for the same force.

320. When a solid of any of the materials used in constructions is acted upon by a force so as to produce deflection, experiment has shown that the fibres towards the concave side of the bent solid are contracted, while those towards the convex side are elongated; and that, between the fibres which are contracted and those which are elongated, others are found which have not undergone any change of length. The part of the solid occupied by these last fibres has received the name of the *neutral line* or *neutral axis*.

321. The hypothesis usually adopted, with respect to the circumstances attending this kind of strain, is that the con-

tractions and elongations of the fibres on each side of the neutral axis are proportional to their distances from this line; and that, for slight deflections, the neutral axis passes through the centre of gravity of the sectional area. From experiments, however, by Mr. Hodgkinson and Mr. Barlow, on bars having a rectangular cross-section, it appears that the neutral axis, in forged iron and cast iron, lies nearer to the concave than to the convex surface of the bent solid, and, probably, shifts its position when the degree of deflection is so great as to cause rupture. In timber, according to Mr. Barlow, the neutral axis lies nearest to the convex surface; and, from his experiments on solids of forged iron and timber with a rectangular sectional figure, he places the neutral axis at about three-eighths of the depth of the section from the convex side in timber, and between one-third and one-fifth of the depth of the section from the concave side in forged iron.

322. When the strain to which a solid is subjected is sufficiently great to destroy the cohesion between its particles and cause rupture, experiment has shown that the force producing this effect, whether it act by tension, so as to draw the fibres asunder, or by compression, to crush them, is proportional to the sectional area of the solid.

323. From experiments made to ascertain the circumstances of rupture by a tensile force, it appears that the solid torn apart exhibits a surface of fracture more or less even, according to the nature of the material.

324. Most of the experiments on the resistance to rupture by compression, have been made on small cubical blocks, and have given a measure of this resistance greater than can be depended upon in practical applications, when the height of the solid exceeds three times the radius of its base. This point has been very fully elucidated in the experiments of Mr. Hodgkinson upon the rupture by compression of solids with circular and rectangular bases. These experiments go to prove that the circumstances of rupture, and the resistance offered by the solid, vary in a constant manner with its height, the base remaining the same. In columns of cast iron, with circular sectional areas, it was found that the resistance remained constant for a height less than three times the radius of the base; that, from this height to one equal to six times the radius of the base, the resistance still remained constant, but was less than in the former case; and that, for any height greater than six times the radius of the base, the resistance decreased with the height. In the two first cases the solids were found to yield either by the upper portion sliding off

upon the lower, in the direction of a plane making a constant angle with the axis of the solid; or else by separating into conical or wedge-shaped blocks, having the upper and lower surfaces of the solid as their bases, the angle at the apex being double that made by the plane and axis of the solid. With regard to the resistance, it was found that they varied in the ratio of the area of the bases of the solids. Where the height of the solid was greater than six times the radius of the base, rupture generally took place by bending.

325. From experiments by Mr. Hodgkinson, on wood and other substances, it would appear that like circumstances accompany the rupture of all materials by compression; that is, within certain limits, they all yield by an oblique surface of fracture, the angle of which with the axis of the solid is constant for the same material; and that the resistance offered within these limits are proportional to the areas of the bases.

326. Among the most interesting deductions drawn by Mr. Hodgkinson, from the wide range of his experiments upon the strength of materials, is the one which points to the existence of a constant relation between the resistances offered by materials of the same kind to rupture from compression, tension, and a transverse strain. The following *Table* gives these relations, assuming the measure of the crushing force at 1000.

DESCRIPTION OF MATERIAL.	Crushing force per square inch.	Mean tensile force per square inch.	Mean transverse force of a bar 1 inch square and 1 foot long.
Timber.....	1000	1900	85.1
Cast iron.....	1000	158	19.8
Stone.....	1000	100	9.8
Glass (plate and crown).	1000	123	10

II.

STRENGTH OF STONE.

327. The marked difference in the structure and in the proportions of the component elements frequently observed in stone from the same quarry would lead to the conclusion that corresponding variations would be found in the strength of stones belonging to the same class, a conclusion which experiment has confirmed. The experiments made by different individuals on this subject, from not having been conducted in the same manner, and from the omission in most cases of details respecting the structure and component elements of the material tried, have, in some instances, led to contradictory results. A few facts, however, of a general character, have been ascertained, which may serve as guides in ordinary cases; but in important structures, where heavy pressures are to be sustained, direct experiment is the only safe course for the engineer to follow, in selecting a material from untried quarries.

328. Owing to the ease with which stones generally break under a percussive force, and from the comparatively slight resistance they offer to a tensile force and to a transverse strain, they are seldom submitted in structures to any other strain than one of compression; and cases but rarely occur where this strain is not greatly beneath that which the better class of building stones can sustain permanently, without undergoing any change in their physical properties. Where the durability of the stone, therefore, is well ascertained, it may be safely used without a resort to any specific experiment upon its strength, whenever, in its structure and general appearance, it resembles a material of the same class known to be good.

329. The following table exhibits the principal results of experiments made by Mr. G. Rennie, and published in the *Philosophical Transactions of 1818*. The stones tried were in small cubes, measuring one and a half inches on the edge. The table gives the pressure, in tons, borne by each superficial inch of the stone at the moment of crushing.

DESCRIPTION OF STONE.	Spec. gravity.	Crushing w'ght.
<i>Granites.</i>		
Aberdeen, (<i>blue</i>).....	2.625	4.83
Peterhead.....	—	3.70
Cornwall.....	2.662	2.83
<i>Sandstones.</i>		
Dundee.....	2.530	2.96
Do.....	2.506	2.70
Derby (<i>red and friable</i>).....	2.316	1.40
<i>Limestones.</i>		
Marble (<i>white-veined Italian</i>).....	2.726	4.32
Do. (<i>white Brabant</i>).....	2.697	4.11
Limerick (<i>black compact</i>).....	2.598	3.95
Devonshire (<i>red marble</i>).....	—	3.31
Portland stone (<i>fine-grained oolite</i>).....	2.428	2.04

The following results are taken from a series of experiments made under the direction of Messrs. Bramah & Sons, and published in *Vol. 1, Transactions of the Institution of Civil Engineers*. The first column of numbers gives the weights, in tons, borne by each superficial inch when the stones commenced to fracture; the second column gives the crushing weight, in tons, on the same surface.

DESCRIPTION OF STONE.	Aver. weight producing fractures.	Average crushing weight.
<i>Granites.</i>		
Herme.....	4.77	6.64
Aberdeen (<i>blue</i>).....	4.13	4.64
Heytor.....	3.94	6.19
Dartmoor.....	3.52	5.48
Peterhead (<i>red</i>).....	2.88	4.88
Peterhead (<i>blue gray</i>).....	2.86	4.36
<i>Sandstones.</i>		
Yorkshire.....	2.87	3.94
Craigleith.....	1.89	2.97
Humbic.....	1.69	2.06
Whitby.....	1.00	1.06

The following table is taken from one published in *Vol.*

2, *Civil Engineer and Architect's Journal*, which forms a part of the Report on the subject of selecting stone for the New Houses of Parliament. The specimens submitted to experiment were cubical blocks measuring two inches on an edge.

DESCRIPTION OF STONE.	Specific gravity.	Weight produ- cing fracture.	Crushing w'ght.
<i>Sandstones.</i>			
Craigleith.....	2.232	1.89	3.5
Darley Dale.....	2.628	2.75	3.1
Heddon.....	2.229	0.82	1.75
Kenton.....	2.247	1.51	2.21
Mansfield.....	2.338	0.88	1.64
<i>Magnesian Limestones.</i>			
Bolsover.....	2.316	2.21	3.75
Huddleston.....	2.147	1.03	1.92
Roach Abbey.....	2.134	0.75	1.73
Park Nook.....	2.138	0.32	1.92
<i>Oolites.</i>			
Ancaster.....	2.182	0.75	1.04
Bath Box.....	1.839	0.56	0.66
Portland.....	2.145	0.95	1.75
Ketton.....	2.045	0.69	1.18
<i>Limestones.</i>			
Barnack.....	2.090	0.50	0.79
Chilmark (<i>silicious</i>).....	2.481	1.32	3.19
Hamhill.....	2.260	0.69	1.80

The numbers of the first column give the specific gravities; those in the second column the weight in tons on a square inch, when the stone commenced to fracture; and those in the third the crushing weight on a square inch.

The following table exhibits the results of experiments on the resistance of stone to a *transverse strain*, made by Colonel Pasley, on prisms 4 inches long, the cross section being a square of 2 inches on a side; the distance between the points of support 3 inches.

330. The conductors of the experiments on the stone for the New Houses of Parliament, Messrs. Daniell and Wheatstone, who also made a chemical analysis of the stones, and applied to them Brard's process for testing their resistance to

DESCRIPTION OF STONE.	Weight of stone per cubic foot in lbs.	Average breaking weight in lbs.
1. Kentish Rag.....	165.69	4581
2. Yorkshire Landing.....	147.67	2887
3. Cornish granite.....	172.24	2808
4. Portland.....	148.08	2682
5. Craigleith.....	144.47	1896
6. Bath.....	122.58	666
7. Well-burned bricks.....	91.71	752
8. Inferior bricks.....	-	329

frost, have appended the following conclusions from their experiments:—"If the stones be divided into classes, according to their chemical composition, it will be found that in all stones of the same class there exists generally a close relation between their various physical qualities. Thus it will be observed that the specimen which has the greatest specific gravity possesses the greatest cohesive strength, absorbs the least quantity of water, and disintegrates the least by the process which imitates the effects of weather. A comparison of all the experiments shows this to be the general rule, though it is liable to individual exceptions."

"But this will not enable us to compare stones of different classes together. The sandstones absorb the least quantity of water, but they disintegrate more than the magnesian limestones, which, considering their compactness, absorb a great deal."

331. Like conclusions to the preceding were reached by a commission for testing the properties of some of the stones and marbles used in the construction of the Capitol at Washington.

But few experiments have been made upon the strength and other properties of the building stones of the United States, and those of a local character. From the reports of a public commission, and of Professor R. Johnson, on the marbles and micaceous stratified stones used in the walls and foundations of the Capitol at Washington, the same general conclusions were arrived at as in the report of Messrs. Daniell and Wheatstone above cited. The strength of the marbles submitted to experiment varied from about seven thousand to twenty-four thousand pounds to the square inch; the micaceous stones used in the foundations averaged about fifteen thousand pounds to the square inch; some specimens of sandstone gave about five thousand pounds to the square inch; and

one of sienite about twenty-nine thousand pounds to the square inch.—*Report of the Architect of Public Buildings, Dec. 1, 1852.*

332. Rondelet, from a numerous series of experiments on the same subject, published in his work, *Art de Bâtir*, has arrived at like conclusions with regard to the relations between the specific gravity and strength of stones belonging to the same class.

Among the results of the more recent experiments on this subject, those obtained by Mr. Hodgkinson, showing the relation between the crushing, the tensile, and the transverse strength of stone, have already been given.

M. Vicat, in a memoir on the same subject, published in the *Annales des Ponts et Chaussées*, 1833, has arrived at an opposite conclusion from Mr. Hodgkinson, stating as the results of his experiments, that no constant relation exists between the crushing and tensile strength of stone in general, and that there is no other means of determining these two forces but by direct experiment in each case.

333. The influence of form on the strength of stone, and the circumstances attending the rupture of hard and soft stones, have been made the subject of particular experiments by Rondelet and Vicat. Their experiments agree in establishing the points that the crushing weight is in proportion to the area of the base. Vicat states, more generally, that the permanent weights borne by similar solids of stone, under like circumstances, will be as the squares of their homologous sides. These two authors agree on the point that the circular form of the base is the most favorable to strength. They differ on most other points, and particularly on the manner in which the different kinds of stone yield by rupture.

334. **Practical Deductions.** Were stones placed under the same circumstances in structures as in the experiments made to ascertain their strength, there would be no difficulty in assigning the fractional part of the weight termed the *working strain* or *working load* which, in the comparatively short period usually given to an experiment, will crush them, could be borne by them permanently with safety. But, independently of the accidental causes of destruction to which structures are exposed, imperfections in the material itself, as well as careless workmanship, from which it is often placed in the most unfavorable circumstances of resistance, require to be guarded against. M. Vicat, in the memoir before mentioned, states that a permanent strain of $\frac{3.0}{100}$ of the crushing force of experiment may be borne by stone without danger of impair-

ing its cohesive strength, provided it be placed under the most favorable circumstances of resistance. This fraction of the crushing weight of experiment is greater than ordinary circumstances would justify, and it is recommended in practice not to submit any stone to a greater permanent strain than one-tenth of the crushing weight of experiments made on small cubes measuring about two inches on an edge.

Other authorities state that cut stone in cases like the voussoirs of arches and stone pillars should not be subjected to a working strain greater than $\frac{1}{20}$ th of the crushing weight of experiment.

The following table shows the permanent strain, and crushing weight, for a square foot of the stones in some of the most remarkable structures in Europe.

	Permanent strain.	Crushing weight.
Pillars of the dome of St. Peter's (<i>Rome</i>).....	33330	536000
Do. St. Paul's (<i>London</i>).....	39450	537000
Do. St. Geneviève (<i>Paris</i>).....	60000	456000
Do. Church of Toussaint (<i>Angers</i>).....	90000	900000
Lower courses of the piers of the Bridge of Neuilly..	3600	570000

The stone employed in all the structures enumerated in the Table, is some variety of limestone.

335. Expansion of Stone from Increase of Temperature. Experiments have been made in this country by Prof. Bartlett, and in England by Mr. Adie, to ascertain the expansion of stone for every degree of Fahrenheit. The experiments of Prof. Bartlett give the following results:

Granite expands for every degree.....	.000004825
Marble.....	.000005668
Sandstone.....	.000009532

Table of the Expansion of Stone, etc., from the Experiments of Alexander J. Adie, Civil Engineer, Edinburgh.

DESCRIPTION OF STONE.	Decimal of an inch on 23 inches for 180° F.	Decimal of length for 180° F.	Decimal of length for 1° F.	Remarks.
1. Roman cement.....	.0330043	.0014949	.00000750	
2. Sicilian white marble....	.0325392	.0014147	.00000780	} One experiment (<i>moist</i>). } Mean of three (<i>dry</i>).
	.0253946	.00110411	.00000613	
3. Carrara marble.....	.0274344	.0011928	.00000662	} One experiment (<i>moist</i>). } Mean of two (<i>dry</i>).
	.0150405	.0006539	.00000363	
4. Sand-stone (<i>Craigleith</i>)....	.0270693	.0011743	.00000652	Mean of four experiments.
5. Slate (<i>Welch</i>).....	.0238659	.0010376	.00000576	Mean of three do.
6. Red granite (<i>Peterhead</i>)..	.0220416	.0009583	.00000532	} One experiment (<i>moist</i>). } Mean of two (<i>dry</i>).
	.0206266	.0008968	.00000498	
7. Arbroath pavement.....	.0206652	.0008985	.00000499	Mean of four experiments.
8. Caithness pavement.....	.0205788	.0008947	.00000497	Mean of three do.
9. Green-stone (<i>Ratho</i>).....	.0186043	.0008089	.00000449	Mean of three do.
10. Gray granite (<i>Aberdeen</i>)....	.01815695	.00078943	.00000438	Mean of two do.
11. Best stock brick.....	.0126542	.0005502	.00000306	Mean of two do.
12. Fire brick.....	.0113334	.0004928	.00000274	Mean of two do.
13. Black marble (<i>Galway</i>)....	.0102394	.00044519	.00000247	Mean of three do.

III.

STRENGTH OF MORTARS AND CONCRETES.

336. Strength of Mortars. A very wide range of experiments has been made, within a few years back, by engineers both at home and abroad, upon the resistance offered by mortars to a transversal strain, with a view to compare their qualities, both as regards their constituent elements and the processes followed in their manipulation. As might naturally have been anticipated, these experiments have presented very diversified, and in many instances, contradictory results. The general conclusions, however, drawn from them, have been nearly the same in the majority of cases; and they furnish the engineer with the most reliable guides in this important branch of his art.

337. The usual method of conducting these experiments has been to subject small rectangular prisms of mortar, resting on points of support at their extremities, to a transversal strain applied at the centre point between the bearings. This, perhaps, is as unexceptionable and convenient a method as can be followed for testing the comparative strength of mortars.

338. M. Vicat, in the work already cited, gives the following as the average resistances on the square inch offered by mortars to a force of traction; the deductions being drawn from experiments on the resistance to a transversal strain.

Mortars of very strong hydraulic lime.....	170 pounds.
“ ordinary do.	140 “
“ medium do.	100 “
“ common lime do.	40 “
“ do. (bad quality).....	10 “

These experiments were made upon prisms a year old, which had been exposed to the ordinary changes of weather. With regard to the best hydraulic mortars of the same age which had been, during that same period, either immersed in water, or buried in a damp position, M. Vicat states that their average tenacity may be estimated at 140 pounds on the square inch.

339. General Treussart, in his work on hydraulic and common mortars, has given in detail a large number of experiments on the transversal strength of artificial hydraulic mortars, made by submitting small rectangular parallelepipeds of mortar, six inches in length and two inches square, to a transversal strain applied at the centre point between the bearings, which were four inches apart. From these experiments he deduces the following practical conclusions.

That when the parallelepipeds sustain a transversal strain varying between 220 and 330 pounds, the corresponding mortar will be suitable for common gross masonry; but that for important hydraulic works the parallelepipeds should sustain, before yielding, from 330 to 440 pounds.

340. The only published experiments on this subject made in this country are those of Colonel Totten, appended to his translation of General Treussart's work. The results of these experiments are of peculiar value to the American engineer, as they were made upon materials in very general use on the public works throughout the country.

From these experiments Colonel Totten deduces the following general results:

1st. That mortar of hydraulic cement and sand is the stronger and harder as the quality of sand is less.

2d. That common mortar is the stronger and harder as the quantity of sand is less.

3d. That any addition of common lime to a mortar of hydraulic cement and sand weakens the mortar, but that a little lime may be added without any considerable diminution of the strength of the mortar, and with a saving of expense.

4th. The strength of common mortars is considerably improved by the addition of an artificial puzzolana, but more so by the addition of an hydraulic cement.

5th. Fine sand generally gives a stronger mortar than coarse sand.

6th. Lime slaked by sprinkling gave better results than lime slaked by drowning. A few experiments made on air-slaked lime were unfavorable to that mode of slaking.

7th. Both hydraulic and common mortar yielded better results when made with a small quantity of water than when made thin.

8th. Mortar made in the mortar-mill was found to be superior to that mixed in the usual way with a hoe.

9th. Fresh water gave better results than salt water.

341. Strength and Other Properties of Portland Cement.

From experiments made in England by Mr. Grant on the resistance to crushing of blocks of Portland cement, and of Portland cement mortars, the following results are deduced.

1st. The strength of the blocks in both cases increased with time. The blocks of pure cement bearing respectively nearly 4,000 lbs. on the square inch after three months; over 5,000 lbs. at six months; and nearly 6,000 lbs. at nine months.

2d. The strength of the blocks of mortar also increased with time; but decreased as the volume of sand used was increased. The blocks made with one volume of sand to one of cement bore about 2,500 lbs. on the square inch, and those made of six volumes of sand to one of cement 959 lbs. at the end of three months; whilst those made of one volume of sand to one of cement bore 4,561 lbs. on the square inch at the end of nine months, and those made of six volumes of sand to one of cement bore 1,678 lbs. on the square inch at the end of the same period.

From numerous experiments made by Mr. Grant in England, on Portland cement, he draws the following conclusions:—

1st. Portland cement, if it be preserved from moisture, does not, like Roman cement, lose its strength by being kept in casks or sacks, but rather improves by age.

2d. The longer it is in setting, the more its strength increases.

3d. Very strong Portland cement is heavy, of a blue-gray color, and sets slowly. Quick setting cement has, generally, too large a portion of clay in its composition, is brownish in color, and turns out weak if not useless.

4th. The less the amount of water in working the cement up the better.

5th. It is of the greatest importance that the stones or bricks, with which Portland cement is used, should be thoroughly soaked with water. If under water, in a quiescent state, the cement will be stronger than out of water.

6th. Blocks of brickwork, or of concrete, made with Portland cement, if kept under water until required for use, would be much stronger than if kept dry.

7th. Salt water is as good for mixing with Portland cement as fresh water.

8th. Roman cement is very ill adapted for being mixed with sand.

9th. The resistance of a block of pure Portland cement to extension after an immersion of one year was about 480 lbs. on the square inch; whilst the resistances of blocks made of sand and cement, after the same period of immersion, decreased with the quantity of sand added. Blocks of one volume of cement in paste to one of sand giving three-fourths the resistance of those of pure cement; and those of one volume of cement to five of sand giving only one-sixth of the resistance of blocks of pure cement.

10th. Roman cement is only one-third the strength of Portland cement.—*Proceedings of the Institution of Civil Engineers, Vol. XXV., p. 66.*

342. Concrete and Beton. From experiments made on concrete, prepared according to the most approved process in England, by Colonel Pasley, it appears that this material is very inferior in strength to good brick, and the weaker kinds of natural stones.

From experiments made by Colonel Totten on béton, the following conclusions are drawn:

That béton made of a mortar composed of hydraulic cement, common lime, and sand, or of a mortar of hydraulic cement and sand, without lime, was the stronger as the quantity of sand was the smaller. But there may be 0.50 of sand, and 0.25 of common lime, without sensible deterioration; and as much as 1.00 of sand, and 0.25 of lime, without great loss of strength.

Béton made with just sufficient mortar to fill the void spaces between the fragments of stone was found to be less strong than that made with double this bulk of mortar. But Colonel Totten remarks, that this result is perhaps attributable to the difficulty of causing so small a quantity of mortar to penetrate the voids, and unite all the fragments perfectly, in experiments made on a small scale.

The strongest béton was obtained by using quite small

fragments of brick, and the weakest from small, rounded, stone gravel.

A béton formed by pouring grout among fragments of stone, or brick, was inferior in strength to that made in the usual way with mortar.

Comparing the strength of the bétons on which the experiments were made, which were eight months old when tried, with that of a sample of sound red sandstone of good quality, it appears that the strongest prisms of béton were only half as strong as the sandstone.

The working strain on masses of concrete, brick, and rubble masonry seldom exceeds in structures that of one-sixth of the crushing weight of blocks of these materials.

IV.

STRENGTH OF TIMBER.

A wide range of experiments has been made on the resistance of timber to compression, extension, and a transverse strain, presenting very variable results. Among the most recent, and which command the greatest confidence from the ability of their authors, are those of Professor Barlow and Mr. Hodgkinson: the former on the resistance to extension and a transverse strain; the latter on that to compression.

The following Table, taken from Vol. V. Professional Papers of the English Royal Engineers. No. V. Remarks and Experiments on various Woods, give some valuable results on American timber subjected to a strain parallel to the fibre. The column marked C gives the cohesive strength.

	No. of piece and average specific gravity.	No. of experiment.	Mean Transverse Dimensions.		Mean area of Transverse Section.	Breaking weight.	C.	Extreme practical limit of C.		Remarks.				
			B.	D.				Approximate proportion.	lbs.					
ASH, AMERICAN.	No. 9 636	9	.6	.607	.3642	3088	8478	...	4800	Mr. Barlow's English ash, sp. gr. 760 C=17337. Mr. Emerson's do., C=6070.				
		10	.605	.613	.3708	4051	10925	5-9						
		11	.608	.615	.3739	4142	11077	4-7						
		12	.585	.575	.3263	2528	7517	7-9						
		13	.615	.615	.3782	2528	6684	...						
		14	.593	.61	.3617	2675	7395	8-9						
		15	.588	.61	.3586	2387	6656	3-4						
		16	.597	.6	.3582	2580	7202	5-6						
		17	.62	.62	.3844	3473	9035						
											8330			
		BEECH, AMERICAN.		18	.588	.598	.3516	2958			8319	8000 if there be no crushing force.	Crushed. Mr. Barlow's English Beech, sp. gr. 696 C=9912. Mr. Tredgold's do., sp. gr. 696, C=2360.
				19										
				20	.61	.61	.3721	3755			10091		
				21	.607	.603	.366	3687			10073		
				22										
				23	.63	.612	.3855	3687			9564		
				24	.598.	.612							
							9512							
BIRCH, BLACK AMERICAN.	No. 17 645	25	.603	.575	.3467	2567	7404	5-6	4250	Mr. Emerson's Birch, 4290.				
		26	.612	.59	.361	2086	5778	9-10						
		27	.628	.56	.3516	2460	6996	5-8						
		28	.627	.597	.3743	2823	7512	11-14						
		29	.601	.597	.3623	1904	5255	3-4						
		30	.595	.597	.3552	1848	8809	...						
											6959			
ELM, CANADA.	No. 29 685	45	.593	.582	.3451	3528	10223	Records lost.	8000					
		46	.58	.597	.3346	4734	14148							
		47	.587	.58	.3404	4500	13219							
		48	.605	.578	.3496	4263	12193							
	No. 26 703	49	.597	.575	.3432	4399	12817							
		50	.6	.578	.3468	4852	13990							
											12765			

	No. of piece and average specific gravity.	No. of experiment.	Mean Transverse Dimensions.		Mean area of Transverse Section.	Breaking weight.	C.	Extreme practical limit of C.		Remarks.	
			B.	D.				Approximate proportion.	lbs.		
HICKORY, AMERICAN.	No. 33 856	51	.583	.618	.3602	3518	9766	11-13	8000		
		52	.583	.61	.3556	4135	11628	4-5			
		53	.566	.59	.3339	3859	11557	10-13			
		54	.593	.575	.3409	4022	11798	3-4			
		55	.595	.595	.354	3648	10305	5-6			
		56	.595	.588	.3498	3893	11192	10-13			
	No. 30 854	57	.63	.608	.383	4372	11420			
							11095				
	OAK, WHITE AMERICAN.	No. 45 716	80	.59	.595	.351	4414	12547	9-10	6000	Mr. Barlow's Canadian Oak, sp. gr. 872, C=11428.
			81	.598	.595	.356	4890	13736	6-7		
82			.587	.597	.3504	3201	9107				
No. 49 600		83	.598	.542	.3241	2958	9126	4-5			
		84	.59	.585	.3451	2958	8578	4-5			
		85	.597	.598	.357	3088	8646	4-5			
		86	.588	.607	.3569	2755	7719	7-8			
No. 45 716		87	.608	.627	.3812	3523	9241				
							9750				
OAK, BASKET, AMERICAN.		No. 51 937	88	.582	.566	.3294	3528	10710	6-7		
	89		.607	.573	.3478	3716	10684	7-9			
	90		.628	.583	.3661	3353	9158				
	91		.542	.61	.3206	3557	10759	5-6			
	92		.585	.697	.4077	3365	8253	1-11			
	93		.608	.547	.3325	2769	8297	7-9			
	94		.602	.603	.363	4129	11374				
							9891				
OAK, ENGLISH, SAWN AND SEASONED.	No. 62 831	120	.605	.605	.366	3376	9224	3-4	5500	"River and green," beats sawn and seasoned," with reference to both S and C. The uninjured state of the grain has, I apprehend, more to do with the strength than the condition as to the dryness.	
		121	.595	.605	.3599	2315	6432	7-10			
		122	.605	.605	.366	2725	7445				
	No. 63 836	123	.593	.6	.3558	2315	6506				
		124	.598	.61	.3647	3213	8809	7-11			
		125	.6	.605	.363	2963	8162	7-11			
	126	.6	.59	.334	2408	6802	5-6				
		127	.585	.6	.351	2408	6860				
					7530						
OAK, HOLM, AMERICAN.	No. 65 1230	128	.598	.6	.3588	3528	9832		4000	Records lost.	
	No. 67 1141	129	.603	.6	.3618	2688	7429				
		130	.59	.608	.3587	4113	11466				
	No. 68 1140	131	.57	.603	.3437	3111	9051				
		132	.627	.577	.3617	2128	5883				
		133	.597	.573	.3420	2128	6222				
							8314				

	No. of piece and average specific gravity.	No. of experiment.	Mean Transverse Dimensions.		Mean area of Transverse Section.	Breaking weight.	C.		Extreme practical limit of C.	Remarks.	
			B.	D.			Computed break-weight per square inch.	Approximate proportion.			
PINE, RED AMERICAN.	No. 76 568	134	.585	.607	.355	1528	4304	2-3	lbs.	Mr. Barlow's New England Fir, sp. gr. 553, C=9947.	
		135	.587	.6	.3522	1925	5467	2-3			
		136	.582	.592	.3445	1868	5422	3-5			
	No. 78 639	137	.587	.59	.3463	1748	5047	3-5	3000	Mr. Tredgold's Yellow American, sp. gr. 460, C=3900.	
		138	.587	.59	.3463	1975	5703	2 3			
		139	.588	.64	.3763	2449	6508				
							5408				
	PINE, WHITE AMERICAN.	No. 71 450	140	.62	.625	.3875	1424	3674	5-7	2200	
			141	.607	.602	.3654	1204	3295	2-3		
			142	.63	.627	.395	1555	3936	5-6		
143			.635	.635	.3968	1397	3520	5-7			
144			.607	.625	.3793	1295	3418	10-13			
145			.627	.617	.3868	1408	3640			
							3580				

343. Resistance to Tensile Strain. The following table exhibits the specific gravity, and the mean resistance per square inch of various kinds of timber, from the experiments of Prof. Barlow.

The working strain on beams subjected to extension should not exceed $\frac{1}{9}$ of the rupturing strain in permanent structures, but for temporary purposes, like scaffolding, &c., it may be placed at $\frac{1}{4}$ th the rupturing strain with safety.

But few direct experiments have been made upon the elongations of timber from a strain in the direction of the fibres. From some made in France by MM. Minard and Desormes, it would appear that bars of oak having a sectional area of one square inch will be elongated .001176 of their length by a strain of one ton.

344. Resistance to Compressive Strains. The following Table exhibits the results obtained by Mr. Hodgkinson from experiments on short cylinders of timber with flat ends. The diameter of each cylinder was one inch, and its height two inches. The results, in the first column, are a mean from about three experiments on timber moderately dry, being such as is used for making models for castings; those in the second column were obtained in a like manner, from similar

DESCRIPTION OF TIMBER.	Spec. grav.	Mean strength of cohesion per square inch.
Ash (<i>English</i>).....	0.760	17000
Beech, do.	0.700	11500
Box.....	1.000	20000
Deal (<i>Christiania</i>).....	0.680	11000
Do. (<i>Memel</i>).....	0.590	11000
Elm.....	0.540	5780
Fir (<i>New England</i>).....	0.550	12000
Do. (<i>Riga</i>).....	0.750	12600
Do. (<i>Mar Forest</i>).....	0.700	12000
Larch (<i>Scotch</i>).....	0.540	7000
Locust.....	0.950	20580
Mahogany.....	0.637	8000
Norway spars.....	0.580	12000
Oak (<i>English</i>).....	{ from 0.700	9000
	{ to 0.900	15000
Do. (<i>African</i>).....	0.980	14400
Do. (<i>Adriatic</i>).....	0.990	14000
Do. (<i>Canadian</i>).....	0.872	12000
Do. (<i>Dantzic</i>).....	0.760	14500
Pear.....	0.646	9800
Poon.....	0.600	14000
Pine (<i>pitch</i>).....	0.660	10500
Do. (<i>red</i>).....	0.660	10000
Teak.....	0.750	15000

specimens, which were turned and kept dry in a warm place two months longer. A comparison of the results in the two columns shows the effect of drying on the strength of timber; wet timber not having half the strength of the same when dry. The circumstances of rupture were the same as already stated in the general observations under this head; the height of the wedge which would slide off in timber being about half the diameter or thickness of the specimen crushed.

345. Resistance of Square Pillars. Mr. Hodgkinson has made a number of invaluable experiments on the strength of pillars of timber, and of columns of iron and steel, and from them has deduced formulæ for calculating the pressure which they will support before breaking. The experiments on timber were made on pillars with flat ends. The following are the formulæ from which their strength may be estimated.

Calling the breaking weight in lbs., W .

“ the side of the square base in inches, d .

“ the length of the pillar in feet, l .

DESCRIPTION OF WOOD.	Strength per square inch in lbs.	
Alder.....	6831	6960
Ash.....	8683	9363
Baywood.....	7518	7518
Beech.....	7733	19363
Birch (<i>American</i>).....	3297	11663
Do. (<i>English</i>).....	3297	6402
Cedar.....	5674	5863
Crab.....	6499	7148
Red deal.....	5748	6586
White deal.....	6781	7293
Elder.....	7451	9973
Elm.....	—	10331
Fir (<i>spruce</i>).....	6499	6819
Hornbeam.....	4533	7289
Mahogany.....	8198	8198
Oak (<i>Quebec</i>).....	4231	5982
Do. (<i>English</i>).....	6484	10058
Do. (<i>Dantzic, very dry</i>).....	—	7731
Pine (<i>pitch</i>).....	6790	6790
Do. (<i>yellow, full of turpentine</i>).....	5375	5445
Do. (<i>red</i>).....	5395	7518
Poplar.....	3107	5124
Plum (<i>wet</i>).....	3654	—
Do. (<i>dry</i>).....	8241	to 1049
Sycamore.....	7082	—
Teak.....	—	12101
Larch (<i>fallen two months</i>).....	3201	5568
Walnut.....	6063	7227
Willow.....	2898	6128

Then for long columns of oak, in which the side of the square base is less than $\frac{1}{30}$ th the height of the column;

$$W = 24542 \frac{d^4}{l^2}.$$

and for red deal,

$$W = 17511 \frac{d^4}{l^2}.$$

For shorter pillars, where the ratio between their thickness and height is such that they still yield by bending, the strength is estimated by the following formula:

Calling the weight calculated from either of the preceding formulæ, W .

Calling the crushing weight, as estimated from the preceding table, W' .

Calling the breaking weight in lbs., W'' .

Then the formula for the strength is

$$W'' = \frac{W W'}{W + \frac{3}{4} W'}$$

In each of the preceding formulæ d must be taken in inches, and l in feet.

The same rule is followed in proportioning the rupturing to the working strain in timber subjected to compression as in timber subjected to extension.

346. Resistance to Transverse Strains. As timber, from the purposes to which it is applied, is for the most part exposed to a transverse strain, the far greater number of experiments have been made to ascertain the relations between the strain, the deflection caused by it, and the linear dimensions of the piece subjected to the strain. These relations have been made the subject of mathematical investigations, founded upon data derived from experiment, which will be given in the APPENDIX. The following table exhibits the results of experiments made upon beams having a rectangular sectional area, which were laid horizontally upon supports at their ends, and subjected to a strain applied at the middle point between the supports, in a vertical direction.

For a more convenient application of the formulæ to the results of the experiments, the notation adopted in the preceding Art. will be here given.

Call the transverse force necessary to break the beam in lbs., W .

Call the distance between the supports in inches, l .

“ the horizontal breadth of the sectional area in inches, b .

Call the vertical depth of the sectional area in inches, d .

“ the deflection arising from a weight w in inches, f .

Table of Experiments with the foregoing Notation.

DESCRIPTION OF WOOD.	Specific grav.	Values of l .	Values of b .	Value of d .	Value of f .	Value of w .	Value of W .	Authors of experiments.
		Inches.	Inches.	Inches.	Inches.	lbs.	lbs.	
Oak (<i>English</i>).....	.934	84	2	2	1.280	200	637	Prof. Barlow.
Do. (<i>Canadian</i>).....	.872	84	2	2	1.080	225	673	“
Pine (<i>American</i>).....	-	84	2	2	0.931	150	-	“
Oak (<i>English</i>).....	-	30	1	1	0.5	137	-	Tredgold.
White spruce (<i>Canadian</i>).....	.465	24	1	1	0.5	180	285	“
White pine (<i>American</i>)	.455	85.2	2.75	5.55	0.177	777	5189	Lieut. Brown.
Black spruce, do.	.490	85.2	2.75	5.55	0.177	892	5646	“
Southern pine, do.	.872	85.2	2.75	5.54	0.177	1175	9237	“

The following Table, taken from Vol. V. Professional Papers of the English Royal Engineers. No. V. Remarks and Experiments on various Woods, gives the value of S , in the formula $S = \frac{Wl}{4ad^2}$, for transverse strains, in which l , the length of the pieces subjected to experiment, was from five to six feet; the distance between the points of support four feet; the ends of the pieces not confined.

	No. of experiment.	Transverse dimensions.		Breaking weight.	Ultimate deflection.	Weight giving a deflection = 1-100 length.	Weight at which the deflections ceased to be at all uniform.	Corresponding deflections.	Value of S from formula $S = \frac{Wl}{4ad^2}$.	No. of weights applied successively.	Detail Remarks.	
		Mean depth.	Mean breadth.									
ASH, AMERICAN.	7	618	1.98	1.98	1101	2.0	390	642	.8	1702	21	Good specimen; gave warning at 1017 lbs., then fell rapidly and broke at 1101 lbs.
	8	580	2.0	1.85	803	1.8	298	478	.8	1300	16	Tolerable specimen; gave warning gradually at 751 lbs.
	9	636	2.0	1.85	1017	3.0	271	534	.925	1649	19	Do. as No. 8.
			611							1550		
BEECH, AMERICAN.	10	782	2.05	1.98	1241	2.7	428	697	.85	1790	24	Tolerable specimen; gave warning at 603 lbs.
	11	788	2.0	2.0	1073	1.9	416	642	.775	1609	20	Good specimen; gave warning at 1017 lbs.
	12	765	1.98	2.0	1157	2.6	428	534	.625	1770	24	Do. broke well and gradually.
			778							1723		
BIRCH, BLACK AMERICAN.	13	764	2.0	2.0	1521	1.7	540	1241	1.275	2282	30	Very good specimen; warning at 1270 lbs., broke suddenly at 1521.
	14	646	2.0	1.98	1297	2.8	390	697	.875	1905	26	Good specimen; broke suddenly at 1297 lbs.
	15	720	2.0	2.0	1017	2.7	487	642	1.1	1525	24	Do., broke with a long scarf and gradually.
	16	694	2.0	2.0	1129	2.5	536	803	1.17	1693	25	Do., broke well, but with little warning.
	17	645	2.0	2.0	1185	3.3	470	642	1.1	1777	25	Do. Do. Do.
		682							1848		All taken from the same piece.	
ELM, CANADIAN.	26	703	2.046	2.008	1377	3.1	230	761	0.9	1966	38	The great uniformity of texture in this wood presented no irregularities for comment during straining.
	27	700	2.05	2.037	1265	2.5	486	649	1.5	1799	35	
	28	712	2.037	2.03	1321	3.5	423	673	0.8	1891	36	
	29	685	2.03	2.025	1265	3.5	451	621	0.74	1819	35	
		700							1869			

	No. of experiment.	Specific gravity		Transverse dimensions.		Breaking weight.	Ultimate deflection.	Weight giving a deflection = 1-100 length.	Weight at which the deflections ceased to be at all uniform.	Corresponding deflections.	Value of S from formula $S = \frac{Wl}{4bd^3}$.	No. of weights applied successively.	Detail Remarks.
		Mean depth.	Mean breadth.	in.	in.								
HICKORY, AMERICAN.	30	854	2.0	2.0	1330	3.0	390	857	1.75	1995	27	Good piece, but with a small knot 12 inches from centre; gave warning at 1129 lbs., broke at 1330 equally at the knot and centre.	
	31	838	1.98	1.97	857	1.2	390	590	.7	1332	16	Indifferent specimen, two-fifths sap.	
	32	866	2.03	2.0	1270	1.9	481	910	.975	1607	29	Good specimen, warning at 642 lbs.	
	33	856	2.0	1.98	1157	3.0	405	590	.7	1753	23	Do. warning at 1129 lbs., broke well and gradually.	
		871									1672		
OAK, WHITE AMERICAN.	45	716	1.93	1.92	1300	2.0	370	751	1.025	2181	30	Good specimen, warning at 1240 lbs.	
	46	1.95	1.92	963	2.0	331	478	.75	1582	18	Broke soon at a knot; no specific gravity mentioned, 46 and 47 having been at first supposed to be too unsatisfactory; they were, however, recorded, as No. 50 did not give a very much better result.	
	47	1.93	1.93	803	2.0	426	642	.775	1342	15		
	48	666	2.05	2.03	1120	1.9	286	590	1.0	1580	22	Good-looking specimen, but slightly tainted with dry-rot; broke with little warning.	
	49	600	2.00	2.03	1297	2.0	349	478	.65	1916	26	Do. Do. broke with a long scarf.	
	50	600	2.17	0.86	534	1.8	211	366	.9	1582	10	A slab specimen from 48.	
		645									1699		
OAK, BASKET, AMERICAN.	51	987	1.83	1.69	910	3.5	244	478	1.15	1929	17	Fair specimen; warning at about 400 lbs.; broke with a long scarf.	
	52	947	1.81	1.68	697	3.6	207	310	1.6	1339	13	Broke at a large worm-hole, to which this wood seems to be subject.	
	53	937	1.8	1.6	803	3.0	478	1.3	1859	15	Do. These three specimens were all from the same log.	
		940									1709		

	No. of experiment.	Specific gravity.		Transverse dimensions.		Breaking weight.	Ultimate deflection.	Weight giving a deflection = 1-100 length.	Weight at which the deflections ceased to be at all uniform.	Corresponding deflections.	Value of S from formula $S = \frac{Wl}{S \cdot d^3}$.	No. of weights applied successively.	Detail Remarks.
		Mean depth.	Mean breadth.	in.	in.								
OAK, AMERICAN, HOLM OR LIVE OAK.	64	1120	2.029	2.004	1041	1.8	398	313	.86	1513	28	Evidently a bad specimen, though it looked well.	
	65	1230	2.025	2.015	1433	2.4	424	565	.67	2080	35		
	66	1121	2.046	2.039	1265	2.3	393	313	.74	1780	32		
	67	1141	2.029	1.99	1489	3.8	429	313	.7	2181	36		
	68	1140	2.042	2.023	873	1.8	347	257	.62	24		
	69	1209	2.025	2.017	1209	2.2	368	453	.58	1756	31		
	1160								1862				
PINE, WHITE AMERICAN.	70	422	2.01	2.0	910	1.8	316	534	.75	1351	16		Good clean specimen; broke short without warning. Do. Do. Do. All from the same log. Do. } No remarks made at the time of experiment.
	71	450	2.0	2.0	910	1.7	343	590	.8	1365	16		
	72	432	2.0	2.0	910	1.8	357	590	.85	1365	16		
	73	480	2.008	1.99	1041	1557	28		
	74	480	1.98	1.97	985	1531	27		
	75	453	2.0	1.99	1041	1569	23		
		453								1456			
PINE, RED AMERICAN.	76	568	2.0	1.98	1157	2.1	369	642	.8	1753	23	Snapped at the centre; though there was a knot 8 inches from it. Good clean specimen. Do., but broke remarkably short, and without warning.	
	77	656	2.0	2.0	1420	2.5	459	590	.6	2130	32		
	78	639	2.0	2.0	1300	2.1	459	963	1.125	1950	28		
		621								1944			

Deflection of Wooden Beams. Professor W. A. Norton, of the Scientific School of Yale College, made a careful series of experiments, to test the practical accuracy of the formula derived from the generally-received theory of the deflection of beams of a rectangular cross-section, arising from a weight acting at the middle point of the beam resting on two supports, its axis being horizontal.

This formula is: $f = m \frac{Pl^3}{E b d^3}$; in which

P is the applied pressure; f , the deflection due to P ; E , the modulus of elasticity of the material; b , the breadth; d , the

depth; and l , the distance between the points of support of the beam; and m , a constant to be derived from experiment.

From this formula, if accurate, the amount of deflection should vary directly as the pressure and cube of the length, and inversely as the breadth and cube of the depth; but from Prof. Norton's experiments it appears:—

1. That the deflection varies approximately as the pressures, but rather increasing according to a less rapid law.

2. That, although the deflections are not uniformly inversely as the breadth, still the variation from this law is but slight.

3. That, except in "beams whose length bore a high proportion to their depth," the law indicated, that the deflections are inversely proportional to the cubes, is far from being accurate. In other cases it "decreases according to a less rapid law than the inverse cube of the depth."

4. The experiments also show, that the law, that the deflection is directly proportional to the cube of the length, also fails.

From these experiments Prof. Norton says:—

"We may conclude, from these results, that the deflection increases according to a less rapid law than the cube of the length of the stick. We have already seen that it decreases in a less rapid proportion than the inverse cube of the depth. It follows, therefore, that the true formula for the deflection probably contains at least one additional term, which varies less rapidly than as the cube of the length directly and the cube of the depth inversely; or in other words, contains l in the numerator, and d in the denominator, each raised to a lower power than the cube."

"Further, it would seem, then, that the true theory of deflection conducts to the following formula, in the special case of a beam resting on two supports and loaded in the middle.

$$f = c \frac{Pl}{bd} + \frac{Pl^3}{4Ebd^3}."$$

The following table gives the values of E for white pine, and the calculated values of the constant C .

"The general formula applicable to white pine sticks of the general quality used in these experiments will be obtained by taking the mean of the several values of E and C given in the above table. To test the theoretical formula we have obtained we will take the mean values of E and C , for the second set of sticks, given at the bottom of the fourth and fifth columns, viz.: $E=1,427,965$ pounds, and $C=0.0000094$. We thus have

$$f = 0.0000094 \frac{Pl}{bd} + \frac{P^2}{5,711,860 \times bd^2}$$

or, taking $P = 100$ lbs.,

$$f = 0.00094 \frac{l}{bd} + \frac{P}{57,118.6 \times bd^2}$$

The general formula for the deflection may also take the following form:

$$f = \frac{Pl^3}{4 Ebd^3} (4 EC \frac{d^2}{l^2} + 1).$$

TABLE.

Sticks.						Diff. of Extreme Pressures.		Diff. of Intermediate Pressures.	
Set No. 1.						<i>E.</i>	<i>C.</i>	<i>E.</i>	<i>C.</i>
<i>l.</i>		<i>b.</i>		<i>d.</i>					
ft.	in.	ft.	in.	ft.	in.				
2,	or 4	2		1		1,359,500 lbs.	0.0000108	1,308,430 lbs.	0.0000082
2		2,	or 3	3,	or 2	1,566,809 "	0.0000100	1,579,960 "	0.0000095
4		2,	or 3	3,	or 2	1,584,820 "	0.0000087	1,560,800 "	0.0000078
2,	or 4	4		2		1,552,000 "	0.0000140	1,501,200 "	0.0000127
2,	or 4	2		2		1,481,800 "	0.0000108	1,423,600 "	0.0000084
Means.....						1,508,986 "	0.0000108	1,474,798 "	0.0000080
Set No. 2.									
ft.	ft.	in.		in.					
2,	or 4	3		2		1,277,729 lbs.	0.0000084	1,254,000 lbs.	0.0000080
2,	or 4	2		3		1,295,984 "	0.0000089	1,315,000 "	0.0000088
2,	or 4	4		2		1,558,900 "	0.0000110	1,542,860 "	0.0000107
2,	or 4	2		2		1,561,822 "	0.0000084	1,600,000 "	0.0000100
Means.....						1,423,609 "	0.0000092	1,427,965 "	0.0000094

347. Resistance to Detrusion. From the experiments of Prof. Barlow, it appears that the resistance offered by the lateral adhesion of the fibres of fir, to a force acting in a direction parallel to the fibres, may be estimated at 592 lbs. per square inch.

Mr. Tredgold gives the following as the results of experiments on the resistance offered by adhesion to a force applied perpendicularly to the fibres to tear them asunder.

- Oak.....2316 lbs. per square inch.
- Poplar.....1782 " "
- Larch, 970 to 1700 " "

V.

STRENGTH OF CAST-IRON.

The most recent experiments on the strength of this material are those of Mr. Hodgkinson. Those, particularly, made by him on the subject of the strength of columns, and the most suitable form of cast-iron beams to sustain a transversal strain, have supplied the engineer and architect with the most valuable guide in adapting this material to the various purposes of structures.

348. Resistance to Extension.—From a few experiments made by Mr. Rennie and Captain Brown, the tensile strength of cast iron varies from 7 to 9 tons per square inch.

The experiments of Mr. Hodgkinson upon both hot and cold blast iron give the tensile strength from 6 to $9\frac{3}{4}$ tons per square inch.

From some experiments made on American cast iron, under the direction of the Franklin Institute, the mean tensile strength is 20834 lbs., or $9\frac{1}{2}$ tons per square inch.

349. Resistance to Compressive Strain.—The general circumstances attending the rupture of this material by compression, drawn from the experiments of Mr. Hodgkinson, have already been given. The angle of the wedge resulting from the rupture is about 55° .

The mean crushing weight derived from experiments upon short cylinders of hot blast iron was 121,685 lbs., or 54 tons $6\frac{1}{2}$ cwt. per square inch.

That on short prisms of the same, with square bases, 100,738 lbs., or 44 tons $19\frac{1}{2}$ cwt. per square inch.

That on short cylinders of cold blast iron was 125,403 lbs., or 55 tons $19\frac{1}{2}$ cwt. per square inch.

That on short prisms of the same, having other regular figures for their bases, was 100,631 lbs., or 44 tons $18\frac{1}{2}$ cwt. per square inch.

Mr. Hodgkinson remarks with respect to the forms of base differing from the circle: "In the other forms the difference of strength is but little; and therefore we may perhaps admit that difference of form of section has no influence upon the power of a short prism to bear a crushing force."

In remarking on the circumstances attending the rupture, Mr. Hodgkinson further observes: "We may assume, therefore, without assignable error, that in the crushing of short

iron prisms of various forms, longer than the wedge, the angle of fracture will be the same. This simple assumption, if admitted, would prove at once, not only in this material, but in others which break in the same manner, the proportionality of the crushing force in different forms to the area; since the area of fracture would always be equal to the direct transverse area multiplied by a constant quantity dependent upon the material."

Table exhibiting the Ratio of the Tensile to the Compressive Forces in Cast Iron, from Mr. Hodgkinson's Experiments.

DESCRIPTION OF METAL.		Compressive force per square inch.	Tensile force per square inch.	Ratio.
Devon iron,	No. 3. Hot blast	145,435	21,907	6.638 : 1
Buffery iron,	No. 1. Hot blast	86,397	13,434	6.431 : 1
Do.	" Cold blast	93,385	17,466	5.346 : 1
Coed-Talen iron,	No. 2. Hot blast	82,734	16,676	4.961 : 1
Do.	" Cold blast	81,770	18,855	4.337 : 1
Carron iron,	No. 2. Hot blast	108,540	13,505	8.037 : 1
Do.	" Cold blast	106,375	16,683	6.376 : 1
Carron iron,	No. 3. Hot blast	133,440	17,755	7.515 : 1
Do.	" Cold blast	115,442	14,200	8.129 : 1

350. Resistance of Cylindrical Columns. The experiments under this head were made upon solid and hollow columns, both ends of which were either flat or rounded, fixed or loose, or one end flat and the other rounded. In the case of columns with rounded ends, the pressure was applied in the direction of the axis of the column.

The following extracts are made from Dr. Hodgkinson's paper on this subject, published in the *Report of the British Association of 1840*.

"1st. In all long pillars of the same dimensions, the resistance to crushing by flexure is about three times greater when the ends of the pillars are flat than when they are rounded.

"2d. The strength of a pillar, with one end rounded and the other flat, is the arithmetical mean between that of a pillar of the same dimensions with both ends round, and one with both ends flat. Thus, of three cylindrical pillars, all of the same length and diameter, the first having both its ends rounded, the second with one end rounded and one flat, and the third with both ends flat, the strengths are as 1, 2, 3, nearly.

"3d. A long, uniform, cast-iron pillar, with its ends firmly fixed, whether by means of disks or otherwise, has the same power to resist breaking as a pillar of the same diameter, and half the length, with the ends rounded or turned so that the force would pass through the axis.

"4th. The experiments show that some additional strength is given to a pillar by enlarging its diameter in the middle part; this increase does not, however, appear to be more than one seventh or one eighth of the breaking weight.

"5th. The index of the power of the diameter to which the strength of long pillars with rounded ends is proportional, is 3.76 nearly, and 3.55 in those with flat ends, as appeared from the results of a great number of experiments; or the strength of both may be taken as the 3.6 power of the diameter nearly.

"6th. In pillars of the same thickness, the strength is inversely proportional to the 1.7 power of the length nearly.

"Thus the strength of a solid pillar with rounded ends, the diameter of which is d , and the length l , is as $\frac{d^{3.6}}{l^{1.7}}$,"

"The absolute strength of solid pillars, as appeared from the experiments, are nearly as below.

"In pillars with rounded ends,

$$\text{Strength in tons} = 14.9 \frac{d^{3.6}}{l^{1.7}}.$$

"In pillars with flat ends,

$$\text{Strength in tons} = 44.16 \frac{d^{3.6}}{l^{1.7}}.$$

"In hollow pillars nearly the same laws were found to obtain; thus, if D and d be the external and internal diameters of a pillar whose length is l , the strength of a hollow cylinder of which the ends were movable (as in the connecting-rod of a steam-engine) would be expressed by the formula below.

$$\text{Strength in tons} = 13 \frac{D^{3.6} - d^{3.6}}{l^{1.7}}.$$

"In hollow pillars, whose ends are flat, we had from experiment as before,

$$\text{Strength in tons} = 44.3 \frac{D^{3.6} - d^{3.6}}{l^{1.7}}.$$

"The formulæ above apply to all pillars whose length is not less than about thirty times the external diameter; for pillars shorter than this, it is necessary to have recourse to the 'formula,' given under the head of STRENGTH OF TIMBER, for

short pillars of timber, substituting for W and W' in that formula, the proper values applicable to cast-iron."

351. Similar Pillars. "In similar pillars, or those whose length is to the diameter in a constant proportion, the strength is nearly as the square of the diameter, or of any other linear dimension; or, in other words, the strength is nearly as the area of the transverse section."

"In hollow pillars, of greater diameter at one end than the other, or in the middle than at the ends, it was not found that any additional strength was obtained over that of cylindrical pillars."

"The strength of a pillar, in the form of the connecting rod of a steam-engine" (that is, the transverse section presenting the figure of a cross $+$) "was found to be very small, perhaps not half the strength that the same metal would have given if cast in the form of a uniform hollow cylinder."

"A pillar irregularly fixed, so that the pressure would be in the direction of the diagonal, is reduced to one third of its strength. Pillars fixed at one end and movable at the other, as in those flat at one end and rounded at the other, break at one third the length from the movable end; therefore, to economize the metal, they should be rendered stronger there than in other parts."

352. Long-continued Pressure on Pillars. "To determine the effect of a load lying constantly on a pillar, Mr. Fairbairn had, at the writer's suggestion, four pillars cast, all of the same length and diameter. The first was loaded with 4 cwt., the second with 7 cwt., the third with 10 cwt., and the fourth with 13 cwt.; this last load was $\frac{9.7}{10}$ of what had previously broken a pillar of the same dimensions, when the weight was carefully laid on without loss of time. The pillar loaded with 13 cwt. bore the weight between five and six months, and then broke."

353. General Properties of Pillars. "In pillars of wrought-iron, steel, and timber, the same laws, with respect to rounded and flat ends, were found to obtain, as had been shown to exist in cast-iron."

"Of rectangular pillars of timber, it was proved experimentally that the pillar of greatest strength of the same material, is a square."

354. Comparative Strength of Cast-Iron, Wrought-Iron, Steel, and Timber. "It resulted from the experiments upon pillars of the same dimensions but of different materials, that if we call the strength of cast-iron 1000, we

shall have for wrought 1745, cast steel 2518, Dantzic oak 108.8, red deal 78.5."

355. Resistance to Transverse Strain. The following tables and deductions are drawn from the experiments of Messrs. Hodgkinson and Fairbairn, on hot and cold blast iron, as published in their *Reports to the British Association in 1837.*

Table exhibiting the results of experiments by Mr. Hodgkinson on bars of hot blast iron 5 feet long, with a rectangular sectional area; the bars resting horizontally on props 4 feet 6 inches apart; the weight being applied at the middle of the bar.

EXPERIMENT 1.			EXPERIMENT 13.			EXPERIMENT 14.		
Rectangular bar, 1.00 inch broad, 1.00 " deep. Weight of bar, 15 lbs. 2 oz.			Rectangular bar, 1.03 inches broad, 3.00 " deep.			Rectangular bar, 1.02 inches broad, 4.98 " deep. Weight 78 lbs.		
Weight in lbs.	Deflection in inches.	Set, or deflec- tion when unloaded.	Weight in lbs.	Deflection in inches.	Set in inches.	Weight in lbs.	Deflection in inches.	Set in inches.
16	.037	visible	1474	-	.001	5867	.127	-
23	.052	increased	1605	.130	.003	6798	.153	.01
30	.070	.001 ?	1866	.156	.006	7730	.177	-
56	.132	.002	2126	.185	.010	8661	.207	-
112	.271	.008	2388	.212	.012	9593	.235	-
224	.588	.037	2649	.243	.017	10524	.275	.03
336	.940	.087	2910	.272	.022	11087	broke	-
448	1.360	.181	3172	.307	.030	-	-	-
469	broke	-	3433	.340	.038	-	-	-
-	-	-	3694	.378	.050	-	-	-
-	-	-	3956	broke	-	-	-	-
Ultimate deflection 1.444 inches.			Ultimate deflection .416 inch.			Ultimate deflection .299 inch.		

356. The following remarks are extracted from the same Report: "I had remarked, in some of the experiments, that the elasticity of the bars was injured much earlier than is generally conceived; and that instead of its remaining perfect till one third, or upwards, of the breaking weight was laid on, as is generally admitted by writers, it was evident that $\frac{2}{3}$ th, or less, produced in some cases a considerable set or defect of elasticity; and judging from its slow increase after-

Results of experiments, by the same, on the Transverse Strength of Cold Blast Iron; length of bars, and distance between the points of support the same as in the preceding table.

EXPERIMENT 1.			EXPERIMENT 12.			EXPERIMENT 13.		
Rectangular bar, 1.025 inch deep, 1.002 " broad. Weight, 15 lbs. 6 oz.			Rectangular bar, 3.00 inches deep, 1.02 " broad. Weight, 46 lbs. 8 oz.			Rectangular bar, 4.98 inches deep, 1.03 " broad. Weight, 78 lbs.		
Weight in lbs.	Deflection in inches.	Set in inches.	Weight in lbs.	Deflection in inches.	Set in inches.	Weight in lbs.	Deflection in inches.	Set in inches.
16	.033	visible	1082	.091	.003	4936	.110	.013
30	.062	increased	1343	.111	.006	5867	.130	—
56	.120	.002	1605	.138	.008	6798	.153	.020
112	.240	.007	1866	.164	.010	7730	.179	.025
168	.370	.014	2126	.190	.012	8662	.195	—
224	.510	.028	2388	.229	.015	9593	.219	.034
280	.649	.041	2649	.250	.019	10525	.250	.042
336	.798	.061	2910	.281	.026	10588	broke	—
392	.953	.084	3172	.310	.031	—	—	—
448	1.120	.120	3433	.345	.037	—	—	—
504	1.310	.170	3694	.378	.046	—	—	—
514	it bore	—	3825	broke	—	—	—	—
518	broke	—	—	—	—	—	—	—
Ultimate deflection 1.36 inch.			Ultimate deflection 0.395 inch.			Ultimate deflection 0.252.		

wards, I was persuaded that it had not come on by a sudden change, but had existed, though in a less degree, from a very early period."

"From what has been stated above, deduced from experiments made with great care, it is evident that the maxim of loading bodies within the elastic limit has no foundation in nature; but it will be considered as a compensating fact, that materials will bear for an indefinite period a much greater load than has hitherto been conceived."

357. "We may admit," from the mean results, "that the strength of rectangular bars is as the square of the depth."

358. **Effects of Time upon the Deflections caused by a Permanent Load on the Middle of Horizontal Bars.** The following table exhibits the results of Mr. Fairbairn's experiments on this point. The experiments were made on

bars 5 feet long, 1.05 inch deep ; the one of cold blast iron, 1.03 inch broad ; the other of hot blast, 1.01 broad ; distance between the points of support 4 feet 6 inches. The constant weight suspended at the centre of the bars was 280 lbs. This weight remained on from March 11th, 1837, to June 23d, 1838.

Cold blast iron. Deflection in inches.	Date of observation.	Temp.	Hot blast iron. Deflection in inches.	Ratio of increase of deflections.
.930	March 11th, 1837,	-	1.064	—
.963	June 23d, 1838.	78°	1.107	—
.033	Increase,	-	.043	1000 : 1303

359. Mr. Fairbairn in his Report remarks on the above and like results: "The hot blast bar in these experiments being more deflected than the cold blast, indicates that the particles are more extended and compressed in the former iron, with the same weight, than in the latter. This excess of deflection may in some degree account for the rapidity of increase, which it will be observed is considerably greater in the hot than in the cold blast bar."

"It appears from the present state of the bars (which indicate a slow but progressive increase in the deflections) that we must at some period arrive at a point beyond their bearing powers; or otherwise to that position which indicates a correct adjustment of the particles in equilibrium with the load. Which of the two points we have in this instance attained is difficult to determine; sufficient data, however, are adduced to show that the weights are considerably beyond the elastic limit, and that cast iron will support loads to an extent beyond what has usually been considered safe, or beyond that point where a permanent set takes place."

360. **Effects of Temperature.** Mr. Fairbairn remarks: "The infusion of heat into a metallic substance may render it more ductile, and probably less rigid in its nature; and I apprehend it will be found weaker, and less secure under the effects of heavy strain. This is observable to a considerable extent in the experiments" on transverse strength "ranging from 26° up to 190° Fahr."

"The cold blast at 26° and 190°, is in strength as 874 : 743. The hot blast at 26° and 190°, is in strength as 811 : 731.

Being a diminution in strength as 100 : 85 for the cold blast, and 100 to 90 for the hot blast, or 15 per cent. loss of strength in the cold blast, and ten per cent. in the hot blast."




"A number of the experiments made on No. 3 iron have given extraordinary and not unfrequently unexpected results. Generally speaking, it is an iron of an irregular character, and presents less uniformity in its texture than either the first or second qualities; in other respects it is more retentive, and is often used for giving strength and tenacity to the finer metals."

"At 212° we have in the No. 3 a much greater weight sustained than what is indicated by the No. 2 at 190°; and at 600° there appears in both hot and cold blast the anomaly of increased strength as the temperature is advanced from boiling water to melted lead, arising from the greater strength of the No. 3 iron."


361. From experiments made by Major Wade on American cast iron, and by Mr. Fairbairn on English cast iron, it appears that the tenacity of the metal is increased both by remelting, and by prolonged fusion when kept in their certain limits. It also appears from other experiments that repeated fusions occasion a heavy waste of material, and that if either remelting or prolonged fusion be carried too far the result will be an iron of a hard and brittle quality.

362. **Influence of Form upon the Transverse Strength of Cast Iron Beams.** Upon no point, respecting the strength of cast iron, have the experiments of Mr. Hodgkinson led to more valuable results to the engineer and architect, than upon the one under this head. The following tables give the results of experiments on bars of a uniform cross-section (thus **T**) cast from hot and cold blast iron. The bars were 7 feet long, and placed, for breaking, on supports 6 feet 6 inches asunder.

Table exhibiting the Results of Experiments on bars of Hot Blast Iron of the form of cross section as above.



EXPERIMENT 4.			EXPERIMENT 5.		
Bar broken  as shown with the rib downward.			Bar broken  as shown with the rib upward.		
Weight in lbs.	Deflection in inches.	Set.	Weight in lbs.	Deflection in inches.	Set.
7	.015	visible	7	-	not visible
14	.032	.001	14	.025	visible
21	.046	.002	21	.045	.002
28	.064	.004	28	.065	.003
56	.130	.005	56	.134	.005
112	.273	.020	112	.270	.015
168	.444	.035	224	.580	.058
224	.618	.058	336	.895	.101
280	.813	.093	448	1.224	.155
336	1.030	.130	560	1.585	.235
364	broke	-	672	1.985	.330
-	-	-	784	2.410	.490
-	-	-	896	3.450	.722
-	-	-	1008	4.140	1.040
-	-	-	1064	-	-
-	-	-	1120	broke	-
Ultimate deflection 1.138 inches.			Fracture caused by a wedge 2.92 inches long and 1.05 deep, of this form flying out. 		
			Ultimate deflection 4.830.		

Note. The annexed diagram shows the form of the uniform cross-section of the bars. The linear dimensions of the cross-section in the two experiments were as follows:—



Length of parallelogram AB	5 inches	} 5 inches } Expt. 4.	} 0.365 " } Expt. 5.
Depth " AB	0.30 "		
Total depth of bar..... CD	1.55 "		
Breadth of rib..... DE	0.36 "		

Table exhibiting Results of Experiments on bars of Cold Blast Iron 5 feet long, of the same form of cross section as in preceding table.


EXPERIMENT 4.			EXPERIMENT 5.		
Bar broken  with rib downward.			Bar broken  with rib upward.		
Weight in lbs.	Deflection in inches.	Set.	Weight in lbs.	Deflection in inches.	Set.
112	.03	-	112	.03	-
224	.07	-	224	.07	-
336	.11	-	336	.11	-
392	.13	.005	448	.15	-
420	.14	.007	560	.19	.005
448	.15	.010	616	.21	.010
560	.19	.012	672	.23	-
672	.23	.015	728	-	.015
784	.28	.023	784	.27	-
896	.33	.030	896	.31	-
952	.35	-	1008	.35	-
980	broke	-	1120	.39	-
-	-	-	1344	.48	-
-	-	-	1568	.57	-
-	-	-	1792	.67	-
-	-	-	2016	.80	-
-	-	-	2240	.95	-
-	-	-	2296	it bore	-
-	-	-	2352	broke	-
Ultimate deflection 36.			Ultimate deflection 1.03.		
Fracture by a wedge breaking out as in Experiment 5, Hot Blast.					

Note. The linear dimensions of the cross-section of the bars in the above table were nearly the same as those in the preceding table, with the exception of the total depth CD, which in these last two experiments was 2.27 inches, or a little more.

363. The object had in view by Mr. Hodgkinson, in the experiments recorded in the two preceding tables, was two-fold; the one to ascertain the circumstances under which a permanent set, or injury to elasticity takes place; the other to ascertain the effect of the form of cross section on the transverse strength of cast iron. The following extracts from the Report, give the principal deductions of Mr. Hodgkinson on these points.

“In experiments 4 and 5” (on hot blast iron), “which were

on longer bars than the others, cast for this purpose, and for another mentioned further on, the elasticity (in Expt. 4) was sensibly injured with 7 lbs., and in the latter (Expt. 5) with 14 lbs., the breaking weights being 364 lbs., and 1120 lbs. In the former of these cases a set was visible with $\frac{1}{52}$, and in the other with $\frac{1}{80}$ of the breaking weight, showing that there is no weight, however small, that will not injure the elasticity."

"When a body is subjected to a transverse strain, some of its particles are extended and others compressed; I was desirous to ascertain whether the above defect in elasticity arose from tension or compression, or both. Experiments 4 and 5 show this; in these a section of the casting, which was uniform throughout, had the form . During the experiments

the broad part ab was laid horizontally upon supports; the vertical rib c in the latter experiment being upward, in the former downward. When it was downward the rib was extended, when upward the rib was compressed. In both cases the part ab was the fulcrum; it was thin, and therefore easily flexible; but its breadth was such that it was nearly inextensible and incompressible, comparatively, with the vertical rib. We may therefore assume, that nearly the whole flexure which takes place in a bar of this form, arises from the extension or compression of the rib, according as it is downward or upward. In Expt. 4 we have extension nearly without compression, and in Expt. 5 compression almost without extension. These experiments were made with great care. They show that there is but little difference in the quantity of set, whether it arises from tension or compression."

"The set from compression, however, is usually less than that from extension, as is seen in the commencement of the two experiments, and near the time of fracture in that submitted to tension. The deflections from equal weights are nearly the same whether the rib be extended or compressed, but the ultimate strengths, as appears from above, are widely different."

364. Form of Cast Iron Beam best adapted to Resist a Transverse Strain. The experiments of Mr. Hodgkinson on this subject, published in the *Memoirs of the Literary and Philosophical Society of Manchester, Second Series*, vol. 5, are of equal interest with those just detailed, both in their general results and practical bearing. From these experiments, the conclusion drawn is that the form of beam in the

annexed diagrams is the most favorable for resistance to transverse strains.


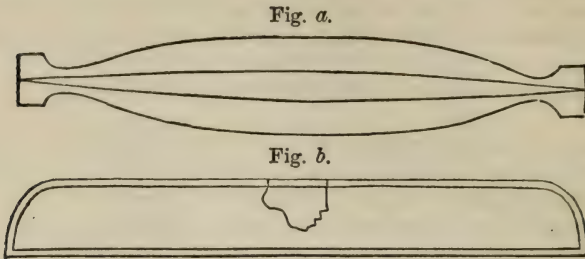


Fig. *a* represents the plan, Fig. *b* the elevation, and Fig. *c* the cross section (enlarged) at the middle of the beam. From the Figs. it will be seen that the beam consists of three parts; a bottom flanch of uniform depth, but variable breadth, tapering from the centre towards the extremities, where the points of support would be placed so as to form a portion of the common parabola on each side of the axis of the beam, the vertex of each parabola being at the centre of the beam. The object of this form of flanch was to make it, according to theory, the strongest, with the same amount of material, to bear a weight uniformly distributed over it. The top flanch is of a like form, but of much smaller breadth and depth than the bottom one. The two are united by a vertical rib of uniform depth and breadth.



The following are the relative dimensions of this form of beam, which, from experiment, gave the most favorable result.

Distance of supports.....	4 ft. 6 inches.
Total depth of beam.....	0 " 5½ "
Breadth of top flanch at centre of beam.....	2.33 "
" bottom flanch " 	6.66 "
Uniform depth of top flanch.....	0.31 "
" bottom flanch.....	0.66 "
Thickness of vertical rib.....	0.266 "
Total area of cross section.....	6.4 square inch.
Weight of beam.....	71 lbs.

"This beam broke in the middle by compression with 26084 lbs., or 11 tons 13 cwt., a wedge separating from its upper side."

“The weights were laid gradually and slowly on, and the beam had borne within a little of its breaking weight a considerable time, perhaps half an hour.”

“The form of the fracture and wedge is represented in the Fig. *b*, where *enf'* is the wedge, *ef*=5.1 inches, *tn*=3.9 inches, angle *enf'*=82°.”

“It is extremely probable, from this fracture, that the neutral point was at *n*, the vertex of the wedge, and therefore at $\frac{3}{4}$ ths the depth of the beam, since $3.9 = \frac{3}{4} \times 5\frac{1}{8}$ nearly.”

The relative dimensions above given were arrived at by “constantly making small additions” to the bottom flanch, until a point was reached where resistance to compression could no longer be sustained. The beams of this form, in all previous experiments, having yielded by the bottom flanch tearing asunder.

“The great strength of this form of cross section is an indisputable refutation of that theory which would make the top and bottom ribs of a cast iron beam equal.”

“The form of cross section” (as above) “is the best which we have arrived at for the beam to bear an ultimate strain. If we adopt the form of beam (as above) I think we may confidently expect to obtain the same strength with a saving of upwards of $\frac{1}{4}$ th of the metal.”

365. *Rules for determining the Ultimate Strength of Cast Iron Beams of the above Forms.* From the results of his experiments, Mr. Hodgkinson has deduced the following very simple formulæ, for determining the breaking weight, in tons, when applied at the middle of a beam.

Call the breaking weight in tons, *W*.

Call the area of the cross section of the bottom flanch, taken at the middle of the beam, *a*.

Call the depth of the beam at the middle point, *d*.

Call the distance between the supports, *l*.

Then

$$W = 26 \frac{ad}{l},$$

when the beam has been cast with the bottom flanch upward and

$$W = 24 \frac{ad}{l},$$

when the beam has been cast on its side.

The working strain on cast iron beams subjected to direct compression is placed by most authorities at from $\frac{1}{6}$ th to $\frac{1}{5}$ th of the crushing weight, when the beam, a column for exam-

ple, is not subjected to violent vibrations or shocks. In the contrary case, particularly in beams subjected to a transverse strain, it is recommended to reduce the working strain to $\frac{1}{10}$ th the crushing strain.

366. Effect of Horizontal Impact upon Cast Iron Bars. The following tables of experiments on this subject, and the results drawn from them, are taken from a paper by Mr. Hodgkinson, published in the *Fifth Report of the British Association*.

The bars under experiment were impinged upon by a weight suspended freely in such a position that, hanging vertically, it was in contact with the side of the bar. The blow was given by allowing the weight to swing through different arcs. The bars were so confined against lateral supports, that they could take no vertical motion.

Table of experiments on a cast iron bar, 4 ft. 6 in. long, 1 in. broad, $\frac{1}{2}$ in. thick, weighing $7\frac{1}{4}$ lbs., placed with the broad-side against lateral supports 4 ft. asunder, and impinged upon by cast iron and lead balls weighing $8\frac{1}{2}$ lbs., swinging through arcs of the radius 12 feet.

Impact with leaden ball.			Impact with iron ball.		
Chord of arc fallen through in feet.	Observed chord of recoil of ball in inches.	Observed deflection of bar in inches.	Chord of arc fallen through in feet.	Observed chord of recoil of ball in inches.	Observed deflection of bar in inches.
1	6.5	.24	1	6.5	.23
2	13	.46	2	14	.46
3	19	.73	3	20	.65
4	27	.97	4	29	.98
5	34	1.30	5	37	1.32
6	47	1.60	6	48	1.65

“Before the experiments on impact were made upon this bar, it was laid on two horizontal supports 4 feet asunder, and weights gently laid on the middle bent it (in the same direction that it was afterwards bent by impact) as below :

28 lbs. bent it .37 inch.

56 lbs. “ .77 inch. Elasticity a little injured.”

Table of experiments on a cast iron bar 7 ft. long, 1.08 in. broad and 1.05 in. thick, weighing 23½ lbs., placed, as in preceding experiments, against supports 6 ft. 6 in. asunder, and bent by impacts in the middle. Impinging ball of cast iron weighing 20¾ lbs. Radius of arcs 16 feet.

Impact upon bar.		Impact upon the weight.	
Chord of arc fallen through.	Observed deflection in inches.	Chord of arc fallen through.	Observed deflection in inches.
2	.46	2	.31
3	.62	3	.43
4	.87	4	.69
5	1.03	5	.81
6	1.24	6	1.04
7	1.44	7	1.28
8	1.80	8	1.41
-	-	9	1.63

The results in the 3d and 4th columns of the above table were derived from allowing the ball to impinge against a weight of 56 lbs., hung so as to be in contact with the bar.

“Before the experiments on impact, the beam was laid on two supports 6 ft. 6 in. asunder, and was bent .78 in. by 123 lbs. (including the pressure from its own weight), applied gently in the middle.”

Tables of experiments on two cast iron bars, 4 ft. 6 in. long, full inch square, weighing 14 lbs. 10 oz. nearly, placed against supports 4 feet apart, and impinged upon by a cast iron ball weighing 44 lbs. Radius 16 ft.

Impact in the middle.		Impact at one-fourth the length from the middle of the bars.		
Chords of arcs in feet.	Mean deflections of the two bars in inches.	Chords of arcs in feet.	Mean deflections of the two bars in inches.	Mean ratio of the deflections in the two cases.
2	.35	2	.24	-
3	.55	3	.42	-
4	.77	4	.52	694
5	.95	5	.64	-
5.5	1.05	5.5	.70	-
6	Broke in the middle	6	Broke at the point of impact	-

The results in the 1st of the above tables are from bars struck in the middle, those in the 2d table are from bars struck at the middle point between the centre and extremity of the bar.

From the above and other experiments the conclusion is drawn, "that a uniform beam will bear the same blow, whether struck in the middle or half way between that and one end."

"From all the experiments it appears that the deflection is nearly as the chord of the arc fallen through, or as the velocity of impact."

The following conclusions are drawn from the experiments.

(1.) "If different bodies of equal weight, but differing considerably in hardness and elastic force, be made to strike horizontally against the middle of a heavy beam supported at its ends, all the bodies will recoil with velocities equal to one another."

(2.) "If, as before, a beam supported at its ends be struck horizontally by bodies of the same weight, but different hardness and elastic force, the deflection of the beam will be the same whichever body be used."

(3.) "The quantity of recoil in a body, after striking against a beam as above, is nearly equal to (though somewhat below) what would arise from the full varying pressure of a perfectly elastic beam, as it recovered its form after deflection."

Note. This last conclusion is drawn from a comparison of the results of experiment with those obtained from calculation, in which the beam is assumed as perfectly elastic.

(4.) "The effect of bodies of different natures striking against a hard, flexible beam, seems to be independent of the elasticities of the bodies, and may be calculated, with trifling error, on a supposition that they are inelastic."

(5.) "The power of a uniform beam to resist a blow given horizontally, is the same in whatever part it is struck."

367. From the results of the experiments of Messrs. Fairbairn and Hodgkinson, on the properties of cold and hot blast iron, it appears that the ratio of their resistances to impact is 1000 to 1226.3, the resistance of cold blast being represented by 1000: the resistance, or power of the beam to bear a horizontal impact, being measured by the product of its breaking weight from a transverse strain at the middle of the beam and its ultimate deflection. This measure, Mr. Hodgkinson remarks, "supposes that all cast iron bars of the same dimensions, in our experiments, are of the same weight, and that the deflection of a beam up to the breaking weight would be

as the pressure. Neither of these is true; they are only approximations; but the difference in the weights of cast iron bars of equal size is very little, and, taking them as the same, it may be inferred from my paper on Impact upon Beams (*Fifth Report of the British Association*) that the assumption above gives results near enough for practice."

VI.

STRENGTH OF WROUGHT IRON.

THIS material, from its very extensive applications in structures where a considerable tensile force is to be resisted, as in suspension bridges, iron ties, etc., has been the subject of a very great number of experiments. Among the many may be cited those of Telford and Brown in England, Duleau in France, and the able and extensive series upon plate iron for steam boilers, made under the direction of the Franklin Institute, and published in the 19th and 20th vols. (*New Series*) of the *Journal of the Institute*.

368. Resistance to Tensile Strain. The tables on the next page exhibit the tensile strength of this material under ordinary temperatures, and in the different states in which it is used for structures.

It is remarked, in the Report of the Sub-committee, "that the inherent irregularities of the metal, even in the best specimens, whether of rolled or hammered iron, seldom fall short of 10 or 15 per cent. of the mean strength."

From the same series of experiments, it appears that the strength of rolled plate lengthwise is about 6 per cent. greater than its strength crosswise.

In the *Tenth Report of the British Association* in 1840, Mr. Fairbairn has given the results of experiments on plate iron by Mr. Hodgkinson, from which it appears that the mean strength of iron plates lengthwise is 22.52 tons.

	Crosswise	" 23.04 "
Single-riveted plates	"	18,590 lbs.
Double-riveted plates	"	22,258 "

Representing the strength of the plate by 100.	
The double-riveted plates will be.....	70.
The single-riveted plates will be.....	56.

Table exhibiting the Strength of Square and Round Bars of Wrought Iron.

DESCRIPTION OF IRON.	Length of pieces in feet.	Extension before rupture in inches.	Breaking weight in tons.	Tensile strength per square inch.	Author.
Bar 1 inch square, <i>Welsh</i>	1	22.75	29	29	Telford.
“ “ <i>Swedish</i>	1	0.375	29	29	“
Round bar, 2 in. diam. “.....	1	2.2	100	29.28	“
Bar, 1.31 inch square “.....	3.5	0.19	40.95	23.75	Brown.
“ 1.19 “ “.....	3.5	3.00	33.50	23.75	“
Round bar, 1.31 in. diam., <i>Russian</i>	3.5	2.25	36.10	26.50	“
Bar, 1.25 inch square, <i>Welsh</i>	3.5	2.00	38.05	24.35	“
Round bar, 2 in. diam. “.....	12.5	18.50	82.75	26.33	“
Bars reduced in the middle by hammering to 0.375 in. square	31.35	Brunel.
“ “ 0.50 “.....	30.80	“
Bar, <i>Missouri</i>	21.38	} Franklin Institute.
“ (slit rods).....	22.32	
“ <i>Tennessee</i>	23.25	“
“ <i>Salisbury, Connecticut</i>	25.89	“
“ <i>Swedish</i>	25.97	“
“ <i>Centre Co., Penn.</i>	26.07	“
“ <i>Lancaster Co., Penn.</i>	26.18	“
“ (cable iron) <i>English</i>	26.62	“
“ do. hammer-hardened “.....	31.70	“
“ <i>Russian</i>	33.95	“
Wire, 0.333 in. diam. <i>Phillipsburg</i>	37.58	“
“ 0.190 “ “.....	32.98	“
“ 0.156 “ “.....	39.80	“
“ 0.10 “ <i>English</i>	35.81	Telford.

Table exhibiting the Mean Strength of Boiler Iron, per square inch in lbs., cut from plates with shears.

Process of manufacture.	Rough edge bar.	Edges filed uni- formly.	Notches filed into bar on each edge.
Piled iron.....	53,045	56,081	63,266
Hammered plate.....	47,506	55,584	58,447
Puddled iron.....	52,341	51,039	62,420

Professor Barlow, in his *Report to the Directors of the London and Birmingham Railroad* (Journal of Franklin Institute, July, 1835), states, as the results of his experiments, that a bar of malleable iron one inch square is elongated the $\frac{1}{10,000}$ th part of its length by a strain of one ton; that good iron is elongated the $\frac{1}{10,000}$ th part by a strain of 10 tons, and is injured by this strain, while indifferent or bad iron is injured by a strain of 8 tons.

From the Report made to the Franklin Institute, it appears that the first set, or permanent elongation, may take place under very different strains, varying with the character of the material. The most ductile iron yields permanently to a low

degree of strain. The extremes by which a permanent set is given vary between the 0.416 and 0.872 of the ultimate strength; the mean of thirteen comparisons being 0.641.

From the able series of experiments made by Mr. Kirkaldy at Glasgow, on the tensile strength of wrought iron, he has arrived at the following general conclusions (*Kirkaldy, Experiments on Wrought Iron and Steel, 2d Ed., 1866*):—

1. The breaking strain does *not* indicate the quality, as hitherto assumed.

2. A *high* breaking strain may be due to the iron being of superior quality, dense, fine, and moderately soft, or simply to its being very hard and unyielding.

3. A *low* breaking strain may be due to looseness and coarseness in the texture, or to extreme softness, although very close and fine in quality.

4. The contraction of area at fracture, previously overlooked, forms an essential element in estimating the quality of specimens.

5. The respective merits of various specimens can be correctly ascertained by comparing the breaking strain *jointly* with the contraction of area.

6. Inferior qualities show a much greater variation in the breaking strain than superior.

7. Greater differences exist between small and large bars in coarse than in fine varieties.

8. The prevailing opinion of a rough bar being stronger than a turned one is erroneous.

9. Rolled bars are slightly hardened by being forged down.

10. The breaking strain and contraction of area of iron plates are greater in the direction in which they are rolled than in a transverse direction.

11. A very slight difference exists between specimens from the centre and specimens from the outside of crank-shafts.

12. The breaking strain and contraction of area are greater in those specimens cut lengthways out of crank-shafts than in those cut crossways.

13. Iron, when fractured suddenly, presents invariably a crystalline appearance; when fractured slowly, its appearance is invariably fibrous.

14. The appearance may be changed from fibrous to crystalline by merely altering the shape of specimen so as to render it more liable to snap.

15. The appearance may be changed by varying the treatment so as to render the iron harder and more liable to snap.

16. The appearance may be changed by applying the strain so suddenly as to render the specimen more liable to snap, from having less time to stretch.

17. Iron is less liable to snap the more it is worked and rolled.

18. The "skin," or outer part of the iron, is somewhat harder than the inner part, as shown by appearance of fracture in rough and turned bars.

19. The mixed character of the scrap-iron used in large forgings is proved by the singularly varied appearance of the fractures of specimens cut out of crank-shafts.

20. The texture of various kinds of wrought iron is beautifully developed by immersion in dilute hydrochloric acid, which, acting on the surrounding impurities, exposes the metallic portion alone for examination.

21. In the fibrous fractures the threads are drawn out, and are viewed externally, whilst in the crystalline fractures the threads are snapped across in clusters, and are viewed internally or sectionally. In the latter cases the fracture of the specimen is always at right angles to the length; in the former it is more or less irregular; fracture is nearly free of lustre and unlike the crystalline appearance of iron suddenly fractured; the two, combined in the same specimen, are shown in iron bolts partly converted into steel.

22. The little additional time required in testing those specimens whose rate of elongation was noted had no injurious effect in lessening the amount of breaking strain, as imagined by some.

23. The rate of elongation varies not only extremely in different qualities, but also to a considerable extent in specimens of the same brand.

24. The specimens were generally found to stretch equally throughout their length until close upon rupture, when they more or less suddenly drew out, usually at one part only, sometimes at two, and, in a few exceptional cases, at three different places.

25. The ratio of ultimate elongation may be greater in short than in long bars in some descriptions of iron, whilst in others the ratio is not affected by difference in the length.

26. The lateral dimensions of specimens forms an important element in comparing either the rate of, or the ultimate elongations—a circumstance which has been hitherto overlooked.

27. Iron bolts, case-hardened, bore a less breaking strain

than when wholly iron, owing to the superior tenacity of the small proportion of steel being more than counter-balanced by the greater ductility of the remaining portion of iron.

28. Iron highly heated and suddenly cooled in water is hardened, and the breaking strain, when gradually applied, increased, but at the same time it is rendered more liable to snap.

29. Iron, like steel, is softened, and the breaking strain reduced by being heated and allowed to cool slowly.

30. Iron, subjected to the cold-rolling process, has its breaking strain greatly increased by being made extremely hard, and not by being "consolidated," as previously supposed.

31. Specimens cut out of crank-shaft are improved by additional hammering.

32. The galvanizing or tinning of iron plates produces no sensible effects on plates of the thickness experimented on. The results, however, may be different should the plates be extremely thin.

33. The breaking strain is materially affected by the shape of the specimen. Thus the amount borne was much less when the diameter was uniform for some inches of the length than when confined to a small portion—a peculiarity previously unascertained and not even suspected.

34. It is necessary to know correctly the exact conditions under which any tests are made, before we can equitably compare results obtained from different quarters.

35. The startling discrepancy between experiments made at the Royal Arsenal, and by the writer, is due to the difference in the shape of the respective specimens, and not to the difference in the two testing machines.

36. In screwed bolts the breaking strain is found to be greater when old dies are used in their formation than when the dies are new, owing to the iron becoming harder by the greater pressure required in forming the screw thread when the dies are old and blunt, than when new and sharp.

37. The strength of screw-bolts is found to be in proportion to their relative areas, there being only a slight difference in favor of the smaller compared with the larger sizes, instead of the very material difference previously imagined.

38. Screwed bolts are not necessarily injured although strained nearly to their breaking-point.

39. A great variation exists in the strength of iron bars which have been cut and welded; whilst some bear almost as

much as the uncut bar, the strength of others is reduced fully a third.

40. Iron is injured by being brought to a white or welding heat if not at the same time hammered or rolled.

41. The breaking strain is considerably less when the strain is applied suddenly instead of gradually, though some have imagined that the reverse is the case.

42. The contraction of area is also less when the strain is suddenly applied.

43. The breaking strain is reduced when the iron is frozen; with the strain gradually applied, the difference between a frozen and unfrozen bolt is lessened, as the iron is warmed by the drawing out of the specimen.

44. The amount of heat developed is considerable when the specimen is suddenly stretched, as shown in the formation of vapor from the melting of the layer of ice on one of the specimens, and also by the surface of others assuming tints of various shades of blue and orange, not only in steel, but also, although in a less marked degree, in iron.

45. The specific gravity is found generally to indicate pretty correctly the quality of specimens.

46. The density of iron is *decreased* by the process of wire-drawing, and by the similar process of cold-rolling, instead of *increased*, as previously imagined.

47. The density in some descriptions of iron is also decreased by additional hot-rolling in the ordinary way; in others the density is very slightly increased.

48. The density of iron is decreased by being drawn out under a tensile strain, instead of increased, as believed by some.

The breaking strain per square-inch of wrought iron is generally stated to be about twenty-five tons for bars, and twenty tons for plates. This corresponds very nearly with the results of the writer's experiments, of which the following table presents a condensed summary:—

	Highest, lbs.	Lowest, lbs.	Mean, lbs.	Tons.
188. Bars, rolled.....	68,848	44,584	57,555	=25 $\frac{1}{2}$
72. Angle-iron, etc.....	63,715	37,909	54,729	=24 $\frac{1}{2}$
167. Plates, lengthways.....	62,544	37,474	50,737	} =21 $\frac{1}{2}$
160. Plates, crossways.....	60,756	32,450	46,171	

Although the *breaking* strain is generally assumed to be about twenty-five tons for bars, and twenty tons for plates, very great difference of opinion exists as to the amount of *working* strain, or the load which can with safety be applied

in actual practice. The latter is variously stated at from a third to a tenth. It will be observed that whilst much discussion has arisen as to the amount of working strain, or the ratio the load should bear to that of the breaking strain, the important circumstance of the *quality* of the iron, as influencing the working strain, has been overlooked. The Board of Trade limits the strain to 5 tons, or 11,200 lbs. per square inch.

It must be abundantly evident, from the facts which have been produced, that the breaking strain, when taken alone, gives a false impression of, instead of indicating, the real quality of the iron, as the experiments which have been instituted reveal the somewhat startling fact, that frequently the inferior kinds of iron actually yield a higher result than the superior. The reason of this difference was shown to be due to the fact that, whilst the one quality retained its original area, only very slightly decreased by the strain, the other was reduced to less than one-half. Now, surely this variation, hitherto unaccountably completely overlooked, is of importance as indicating the relative hardness or softness of the material, and thus, it is submitted, forms an essential element in considering the safe load that can be practically applied in various structures. It must be borne in mind that although the softness of the material has the effect of lessening the amount of the *breaking* strain, it has the very opposite effect as regards the *working* strain. This holds good for two reasons: first, the softer the iron the less liable it is to snap; and second, fine or soft iron, being more uniform in quality, can be more depended upon in practice. Hence the load which this description of iron can suspend with safety may approach much more nearly the limit of its breaking strain than can be attempted with the harder or coarser sorts, where a greater margin must necessarily be left.

Special attention is now solicited to the practical use that may be made of the new mode of comparison introduced by the writer, viz., the *breaking strain per square inch of the fractured area of the specimen, instead of the breaking strain per square inch of the original area.*

As a necessary corollary to what he has just endeavored to establish, the writer now submits, in addition, that the *working* strain should be in proportion to the breaking strain per square inch of fractured area, and not to the breaking strain per square inch of original area, as heretofore. He does not presume to say what that ratio should be, but he fully maintains that some kinds of iron experimented on by him will

sustain with safety more than double the load that others can suspend, especially in circumstances where the load is unsteady, and the structure exposed to concussions, as in a ship, or to vibratory action, as in a railway bridge.

§69. Resistance to Compressive Strain. But few experiments have been published on the resistance of this material to compression. Rondelet states that it commences to yield under a pressure of about 70,800 lbs. per square inch, and that when the altitude of the specimen tried is greater than three times the diameter of the base it yields by bending. Mr. Hodgkinson states that the circumstances of its rupture from crushing indicate a law similar to what obtains in cast iron.

The same rule for proportioning the working strain to the crushing strain is followed in wrought iron subjected to compression as in cast iron.

Resistance to a Transverse Strain. The following tables exhibit the circumstances of deflection from a transverse strain on bars laid on horizontal supports; the weight being applied at the middle of the bar.

The table I. gives the results on bars 2 inches square, laid on supports 33 inches asunder; table II. the results on bars 2 inches deep, 1.9 in. broad, bearing as in table I.

TABLE I.

TABLE II.

Weight in tons.	Deflections in inches for each half ton.	Weight in tons.	Deflections in inches for each half ton.
.75	.020	.250	—
1.00	.020	.50	.016
1.50	.020	1.00	.022
2.00	.030	1.50	.020
2.50	.020	2.00	.026
3.00	Set	2.25	.018
—	—	2.50	.026
—	—	2.75	.038
—	—	3.00	.092

The above experiments were made by Professor Barlow, and published in his report already cited. He remarks on the results in Table II., that the elasticity was injured by 2.50 tons and destroyed by 3.00 tons.

§70. Trials were made to ascertain mechanically the position of the neutral axis on the cross section. Professor Barlow remarks on these trials, that "the measurements obtained in these experiments being tension 1.6, compression 0.4, giv-

ing exactly the ratio of 1 to 4 in rectangular bars. These results seem the most positive of any hitherto obtained; still there can be little doubt this ratio varies in iron of different qualities; but looking to the preceding experiments, it is probably always from 1 to 3, to 1 to 5."

371. Effects of Time on the Elongation of Wrought Iron from a Constant Strain of Extension. M. Vicat has given, in the *Annales de Chimie et de Physique*, vol. 54, some experiments on this point, made on iron wires which had not been annealed, by subjecting four wires, respectively, to strains amounting to the $\frac{1}{4}$, the $\frac{1}{3}$, the $\frac{1}{2}$, and $\frac{3}{4}$ of their tensile strength, during a period of 33 months.

From the results of these experiments it appears, that each wire, immediately upon the application of the strain to which it was subjected, received a certain amount of extension.

The first wire, which was subjected to a strain of $\frac{1}{4}$ th its tensile strength, was found at the end of the time in question not to have acquired any increase of extension.

The second, submitted to $\frac{1}{3}$ d its tensile strength, was elongated 0.027 in. per foot, independently of the elongation it at first received.

The third, subjected under like circumstances to a strain of $\frac{1}{2}$ th its tensile strength, was elongated 0.40 in. per foot, besides its first elongation.

The fourth, similarly subjected to $\frac{3}{4}$ ths the tensile strength, was elongated 0.061, besides its first elongation.

From observations made during the experiments, it was found that, reckoning from the time when the first elongations took place, the rapidity of the subsequent elongations was nearly proportional to the times; and that the elongations from strains greater than $\frac{1}{4}$ th the tensile strength are, after equal times, nearly proportional to the strains.

M. Vicat remarks in substance, upon the results of these experiments, that iron wire, when not annealed, commences to exhibit a permanent set when subjected to a strain between the $\frac{1}{4}$ and $\frac{1}{3}$ of its tensile strength, and that therefore it is rendered probable that the wire ropes of a suspension bridge, which should be subjected to a like strain, would, when the vibratory motion to which such structures are liable is considered, yield constantly from year to year, until they entirely gave way.

M. Vicat further remarks, in substance, that the measure of the resistance offered by materials to strains exerted only some minutes, or hours, is entirely relative to the duration of the experiments. To ascertain the absolute measure of this resistance, which should serve as a guide to the engineer, the

materials ought to be subjected for some months to strains; while observations should be made during this period, with accurate instruments, upon the manner in which they yield under these strains.

The following tables, on the comparative strength of iron, steel and hemp rope are taken from Stoney's work on the Theory of Strains, Vol. II. The weights are given in English units.

HEMP.		IRON.		STEEL.		EQUIVALENT STRENGTH.	
Circumference, inches.	Lbs. weight pr. fathom.	Circumference, inches.	Lbs. weight pr. fathom.	Circumference, inches.	Lbs. weight pr. fathom.	Working load, cwt.s.	Tearing strain, tons.
2 $\frac{3}{4}$	2	1	1	6	2
....	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1	1	9	3
3 $\frac{1}{4}$	4	1 $\frac{3}{8}$	2	12	4
....	1 $\frac{3}{4}$	2 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	15	5
4 $\frac{1}{2}$	5	1 $\frac{5}{8}$	3	18	6
....	2	3 $\frac{1}{2}$	1 $\frac{5}{8}$	2	21	7
5 $\frac{1}{2}$	7	2 $\frac{1}{4}$	4	1 $\frac{3}{4}$	2 $\frac{1}{2}$	24	8
....	2 $\frac{1}{4}$	4 $\frac{1}{2}$	27	9
6	9	2 $\frac{3}{8}$	5	1 $\frac{7}{8}$	3	30	10
....	2 $\frac{3}{4}$	5 $\frac{1}{2}$	33	11
6 $\frac{1}{2}$	10	2 $\frac{5}{8}$	6	2	3 $\frac{1}{2}$	36	12
....	2 $\frac{3}{4}$	6 $\frac{1}{2}$	2 $\frac{1}{8}$	4	39	13
7	12	2 $\frac{7}{8}$	7	2 $\frac{1}{4}$	4 $\frac{1}{2}$	42	14
....	3	7 $\frac{1}{2}$	45	15
7 $\frac{1}{2}$	14	3 $\frac{1}{8}$	8	2 $\frac{3}{8}$	5	48	16
....	3 $\frac{1}{4}$	8 $\frac{1}{2}$	51	17
8	16	3 $\frac{3}{8}$	9	2 $\frac{1}{2}$	5 $\frac{1}{2}$	54	18
....	3 $\frac{1}{2}$	10	2 $\frac{5}{8}$	6	60	20
8 $\frac{1}{2}$	18	3 $\frac{5}{8}$	11	2 $\frac{3}{4}$	6 $\frac{1}{2}$	66	22
....	3 $\frac{3}{4}$	12	72	24
9 $\frac{1}{2}$	22	3 $\frac{7}{8}$	13	3 $\frac{1}{4}$	8	78	26
10	26	4	14	84	28
....	4 $\frac{1}{4}$	15	3 $\frac{5}{8}$	9	90	30
11	30	4 $\frac{3}{8}$	16	96	32
....	4 $\frac{1}{2}$	18	3 $\frac{1}{2}$	10	108	36
12	34	4 $\frac{5}{8}$	20	3 $\frac{3}{4}$	12	120	40

BESSEMER STEEL, MADE FROM RAIL-ENDS BY MARSH & CO. NOT TEMPERED.

No.	Breaking strain.	Strength per square inch.	Feet in the lb.	Stretch.	Per cent. of length.	Length.	Drawn from.
6	3472	118,471	10.15	1 $\frac{1}{4}$	2.4	5.0783	4-6.
6	3220	110,563	10.28	1 $\frac{1}{4}$	1.3	4.975	4-6.
7	3038	114,549	11.21	1 $\frac{1}{4}$	1.05	4.9063	4-7; large 7
7	3136	122,880	11.6	1 $\frac{1}{4}$	1.8	5.1	4-7.
8	2135	109,034	15.2	1 $\frac{1}{4}$	1.04	4.9844	4-8.
9	2184	127,000	17.3	1 $\frac{1}{4}$	0.35	4.8646	4-6 and 6-9.
9	1904	109,770	17.14	1 $\frac{1}{4}$	0.65	4.823	4-6 and 6-9.
10	1694	117,567	20.6	1 $\frac{1}{4}$	1.2	4.8375	4-10 } no annealing
10	1610	111,718	20.6	1 $\frac{1}{4}$	0.6	4.8375	4-10 } between hard drawn.
10	1834	130,493	21.16	1 $\frac{1}{4}$	1	4.96	4-7 and 7-10 not drawn hard.
11	1407	121,900	25.7	1 $\frac{1}{2}$	0.8	4.833	4-8 and 8-11 not drawn hard.
12	1015	121,679	32.6	1 $\frac{1}{2}$	1.5	4.6094	4-7; 7-10 and 10-12.
13	952	131,055	40.9	1 $\frac{1}{2}$	0.8	5.1106	4-7; 7-10 and 10-13.
14	630	114,508	54	1 $\frac{1}{2}$	1.2	5.073	4-7; 7-10; 10-12 and 12-14.
15	560	170,740	62.5	1 $\frac{1}{2}$	0.85	4.8854	4-7; 7-10; 10-12 and 13-15.
18	466	130,286	83.17	1 $\frac{1}{2}$	0.6	4.947	

GERMAN PUDDLED STEEL. FALKENWORTH ROCHER & CO. NOT TEMPERED.

No.	Breaking strain.	Strength per square inch.	Feet in the lb.	Stretch.	Per cent. of length.	Length.	Drawn from.
8	2226	110,200	14.75	1 $\frac{1}{2}$	0.6	5.0625	4-8. Drawn in Germany.
9	1778	106,900	17.87	1 $\frac{1}{2}$	0.82	5.026	4-9 " " "
9	1820	108,700	17.75	1 $\frac{1}{2}$	1.2	4.9948	4-9 " " "

CAST-STEEL, PIANO WIRE. (M. PÖHLMANN, NUREMBERG.)

No.	Breaking Strain.	Strength per sq. inch.	Feet in the lb.	Stretch	Per cent. of length.	Length.	Drawn from.
14	1624	302,500	55.4	1 $\frac{1}{2}$	1.8	5.1944	drawn wet, no annealing below 10.
14 $\frac{1}{2}$	1400	299,225	63.5	1 $\frac{1}{6}$	2.6	4.96	
15	1008	263,117	70.8	1 $\frac{1}{6}$	1.8	4.69	
15	1078	270,600	74.5	1 $\frac{1}{6}$	1.6	4.656	
16	774	249,700	96.0	1 $\frac{1}{6}$	1.6	4.5	
16 $\frac{1}{2}$	812	283,320	103.8	1 $\frac{3}{6}$	2.0	4.865	
16 $\frac{3}{2}$	784	275,525	104.8	1 $\frac{3}{6}$	1.2	4.9	
16 $\frac{1}{2}$	763	261,576	102.0	1 $\frac{5}{6}$	1.4	4.78	

CAST-STEEL. (JOHNSON, NFPHEW.)

No.	Breaking Strain.	Strength per sq. inch.	Feet in the lb.	Stretch.	Per cent. of length.	Length.	Drawn from.
8	3220	158,823	14.67	$1\frac{3}{8}$	2.2	5.043	4-8
8	3262	160,000	14.5	$1\frac{3}{8}$	3	5.0143	4-8
8	3160	155,400	14.6	$1\frac{3}{8}$	2	5.026	4-8

CAST-STEEL. (WEBSTER, HORSFALL.)

No.	Breaking Strain.	Strength per sq. inch.	Feet in the lb.	Stretch.	Per cent. of length.	Length.	Drawn from.
9	2856	167,601	17.6	$1\frac{1}{2}$	2	4.96	} 4-8, then tempered and finished in 1 hole.
9	2812	166,122	17.6	$1\frac{1}{2}$	1.8	4.96	
9	2842	168,506	17.6	$1\frac{1}{2}$	1.8	4.96	
10	1988	150,560	22.6	$\frac{7}{8}$	1.4	4.927	

The following results were computed from experiments by the late J. A. Roebling, the eminent engineer of the Niagara, Cincinnati and other suspension bridges, on the comparative strength of iron-wire rope and of hemp rope. The breaking weight being in tons of 2,000 lbs.

No.	Circumference of wire rope in inches.	Area of section in sq. inches.	Trade number.	Circumference of hemp rope in inches.	Area of section in sq. inches.	Tearing strain per square inch in tons.	
						Wire rope.	Hemp rope.
1	4.9	1.9	4	12	11.45	22.8	3.8
2	3.91	1.22	6	9.5	7.18	22.3	3.78
3	2.98	0.7	8	7	3.9	22.8	4.1
4	4.00	1.27	12	10	7.95	23.6	3.77
5	2.98	0.7	15	7.25	4.18	22.8	3.82

Note. Nos. 1, 2, 3, were made of what is known as fine wire; Nos. 4, 5, of coarse wire.

372. Effects of Temperature on the Tensile Strength of Wrought Iron. The experiments made under the direction of the Franklin Institute, already noticed, have developed some very curious facts of an anomalous character, with respect to the effect of an increase of temperature upon the

strength of wrought iron. It was found that at high degrees of heat the tensile strength was greater up to a certain point than was exhibited by the same iron at ordinary temperatures. The Sub-committee in their Report remark: "This circumstance was noted at 212° , 392° , and 572° , rising by steps of 180° each from 32° , at which last point some trials have been made in melting ice. At the highest of these points, however, it was perceived that some specimens of the metal exhibited but little, if any, superiority of strength over that which they had possessed when cold, while others allowed of being heated nearly to the boiling-point of mercury, before they manifested any decided indications of a weakening effect from increase of temperature."

"It hence became apparent that any law, taking for a basis the strength of iron in its ordinary condition, and at common temperatures, must be liable to great uncertainty, in regard to its application to different specimens of the metal. It was evident that the anomaly above referred to must be only apparent, and that the tenacity actually exhibited at 572° , as well as that which prevails while the iron is in the state in which it was left by forging or rolling, must be below its maximum tenacity."

From the experiments made upon several bars of the same iron, it appeared that their "maximum tenacity was 15.17 per cent. greater than their mean strength when tried cold."

Calculating the maximum tenacity in other experiments from this standard, the Sub-committee have drawn up the following table exhibiting the relations between diminutions from the maximum tenacity and the degrees of temperature by which they are caused, from which the curve representing the law of these relations can be constructed.

The Sub-committee remark on the construction of the above table: "As some of the experiments which furnished the standards of comparison for strength at ordinary temperatures were made at 80° , and as at this point small variations with respect to heat appear to affect but very slightly the tenacity of iron, it was conceived that for practical purposes, at least, the calculations might be commenced from that point."

"It will be found that with the exception of a slight anomaly between 520° and 570° , amounting to $-.08$, the numbers expressing the ratios between the elevations of temperature, and the diminutions of tenacity, constantly increase until we reach 932° , at which it is 2.97, and that from this point the ratio of diminution decreases to the limits of our range of trials, 1317° , where it is 2.14. It will also be observed, that

the diminution of tenacity at 932°, where the law changes from an increasing to a decreasing rate of diminution, is almost precisely one-third of the total, or *maximum* strength of the iron at ordinary temperatures.”

TABLE.

No. of the comparison.	Observed temperatures.	Observed temperatures—80°.	Observed diminution of tenacity.	Power of the temperature which represents the diminution of tenacity at each point.
1	520°	440°	.0738	2.25
2	570	490	.0869	2.17
3	596	516	.0899	2.38
4	662	582	.1155	2.67
5	770	690	.1627	2.85
6	824	744	.2010	2.94
7	932	852	.3324	2.97
8	1030	950	.4478	2.92
9	1111	1031	.5514	2.63
10	1155	1075	.6000	2.60
11	1237	1157	.6622	2.41
12	1317	1237	.7001	2.14
				Mean 2.58

From the mean of all the rates in the above table the following rule is deduced: “*the thirteenth power of the temperature above 80° is proportionate to the fifth power of the diminution from the maximum tenacity.*”

Professor W. R. Johnson, a member of the Sub-committee, has since applied the results developed in the preceding experiments to practical purposes, in increasing the tenacity of wrought iron by subjecting it to tension under a high degree of temperature, before using it for purposes in which it will have to undergo considerable strains, as, for example, in chain cables, etc.

This subject was brought by Prof. Johnson before the Board of Navy Commissioners in 1841; subsequently, experiments were made by him under direction of the Navy Department the results of which, as exhibited in the following table, were published in the *Senate Public Documents* (1), 28th Congress, 2d Session, p. 641. Dec. 3, 1844.

Prof. Johnson in his letter remarks: “It will be observed that in these experiments the temperature has, with a view to economy of time, been limited to 400°, whereas the best

effects of the process have generally been obtained heretofore when the heat has been as high as 575°."

Table of the Effects of Thermo-tension on the Tenacity and Elongation of Wrought Iron.

KIND OF IRON.	Strength of cold.	Strength after treating with Thermo-tension.	Gain of length.	Gain of strength by the treatment.	Total gain of value.
Tredegar, No. 1, round iron	60	71.4	6.51	19.00	25.51
Do. do.	60	72.0	6.51	20.00	26.51
Tredegar, square bar iron	60	67.2	6.77	12.00	18.77
Tredegar, No. 3, round iron	58	68.4	5.263	17.93	23.19
Salisbury, round (Ames')	105.87	121.0	3.73	14.29	18.02
Mean,	—	—	5.75	16.64	22.40

From the experiments of Mr. Kirkaldy it appears that "wrought iron is injured by being brought to a white heat if not at the same time hammered or rolled."

Resistance of Wrought Iron and Steel to a Shearing Strain.

From the experiments of Mr. Clark on plates joined by a single wrought-iron rivet, and those of Mr. Kirkaldy on steel rivets, it appears that the resistance to a shearing strain of the former was very nearly equal to its tensile strength; and for the latter that it was about three-fourths of its tensile strength.

373. Resistance of Iron Wire to Impact. The following table of experiments gives the results obtained by Mr. Hodgkinson, by suspending an iron ball at the end of a wire (diameter No. 17), and letting another iron ball impinge upon it from different altitudes. The suspended and impinging balls had holes drilled through them, through which the wire passed. A disk of lead was placed on the suspended ball to receive the blow, and lessen the recoil from elasticity.

The following observations are made by Mr. Hodgkinson: "To ascertain the strength and extensibility of this wire, it was broken in a very careful experiment with 252½ lbs., suspended at its lower end, and laid gradually on. And to obtain the increment of a portion of the wire (length 24 ft. 8 in.) when loaded by a certain weight, it had 139 lbs. hung at the bottom, and when 89 lbs. were taken off the load, the wire decreased in length .39 inch.

TABLE.

Length of wire.	Weight of striking ball.	Weight of suspended ball and lead.	Height fallen through by striking ball.	Wire broke with ball falling through.	Remarks.
ft. in.	lbs. oz.	lbs. oz.			
25 0	5 14	0 9	2, 2½, 3, 3½, 4,	4½ } 4¾	No lead. The wire usually broke near the point of impact, and it was adjusted to its length, if fresh wire were not used by a reserve at the top. Broke one inch from top.
—	—	—	(repeated) 2½, 3, 3½, 4, 4½,	5 } 7	
24 0	6 0	10 1	(repeated with fresh wire,) 6,	6½ } 7	
—	—	44 0	1, 2, 3, 4, 5, 6, 6½, 7,	7½ } 7	
—	—	80 8	6, 6½, 7, 7½, 8, 8½, 9,	9½ } 7	
—	—	89 0	8, 8½, 9, 9½, 10, 10½,	11 } 7	
—	—	125 0	8, 8½, 9, 9½, 10,	10½ } 7	
—	40 0	10 1	3, 4 inches,	5 inches } 7	
—	—	80 8	2, 3, 4, 5, 6 inches,	7 do. } 7	
—	—	89 0	4, 5 inches,	6 do. } 7	
24 8	85 0	44 0	2 inches,	3 do. } 7	

“Should it be suggested that the wire by being frequently impinged upon would perhaps be much weakened, the author would beg to refer to a paper of his on Chain Bridges, *Manchester Memoirs*, 2d series, vol. 5, where it is shown that an iron wire broken by pressure several times in succession is very little weakened, and will nearly bear the same weight as at first.”

“The first of the preceding experiments on wires are the only ones from which the maximum can, with any approach to certainty, be inferred; and we see from them that the wire resisted the impulsion with the greatest effect when it was loaded at bottom with a weight, which, added to that of the striking body, was a little more than one-third of the weight that would break the wire by pressure.”

“From these experiments generally, it appears that the wire was weak to bear a blow when lightly loaded.”

“These last experiments and remarks, and some of the preceding ones” (on horizontal impact), “show clearly the benefit of giving considerable weight to elastic structures subject to impact and vibration.”

374. Resistance to Torsion of Wrought and Cast Iron.
—The following table exhibits the results of experiments made by Mr. Dunlop, at Glasgow, on round bars of wrought iron. The twisting weights were applied with an arm of lever 14 feet 2 inches.

Length of bars in inches.	Diameter of bars in inches.	Weight in lbs. pro- ducing rupture.
2 $\frac{3}{4}$	2	250
2 $\frac{1}{4}$	2 $\frac{1}{2}$	384
3	2 $\frac{1}{2}$	408
3	2 $\frac{3}{4}$	700
4	3 $\frac{1}{2}$	1170
5	3 $\frac{1}{2}$	1240
5	3 $\frac{3}{4}$	1662
5	4	1938
6	4 $\frac{1}{2}$	2158

Table of Experiments made by Mr. G. Rennie upon Cast and Wrought Iron. Weight applied at an arm of lever of 2 feet.

MATERIAL.	Length of blocks in inches.	Size of sectional area.	Mean break- ing weight in lbs.	
			lbs.	oz.
Iron cast horizontally.....	0	$\frac{1}{4}$	9	15
“ vertically.....	0	$\frac{1}{4}$	10	10
“ horizontally.....	$\frac{1}{2}$	$\frac{1}{4}$	7	3
“ “.....	$\frac{3}{4}$	$\frac{1}{4}$	8	1
“ “.....	1	$\frac{1}{4}$	8	8
“ vertically.....	$\frac{1}{2}$	$\frac{1}{4}$	10	1
“ “.....	$\frac{3}{4}$	$\frac{1}{4}$	8	9
“ “.....	1	$\frac{1}{4}$	8	5
“ “.....	6	$\frac{1}{4}$	9	12
“ horizontally.....	0	$\frac{1}{2}$	93	12
“ “.....	0	$\frac{1}{2}$	74	
“ “.....	10	$\frac{1}{2}$	52	
Wrought iron (<i>English</i>).....	0	$\frac{1}{4}$	10	2
“ (<i>Swedish</i>).....	0	$\frac{1}{4}$	9	8

VII.

STRENGTH OF STEEL.

375. FROM experiments made in Sweden by a government commission it appears that both the ductility and the strength of steel and iron are influenced by the amount of carbon they contain.

The experiments show that the hardest material has the greatest strength both before and after a permanent set has taken place from the force employed ; but its ductility is also the least. The Bessemer steel in these experiments gave the same results as the other processes for obtaining steel, the same pig iron being used in each case.

The limit for the amount of carbon for the Bessemer steel is from 1.2 to 1.5 per cent. With a larger amount both the strength and ductility was found to decrease. When the amount of carbon does not exceed 0.4 per cent. the ductility of Bessemer steel is about the same as puddled iron from the same pig iron, and as it is not only much stronger but more dense and homogeneous than the puddled material, it is decidedly superior for railway purposes.

From the experiments of the same commission that the strength both of iron and steel, subjected to strains between the extremes of temperature of boiling water and freezing mercury, was greater during low than at ordinary temperatures.

The cheaper methods which have been introduced into the manufacture of steel within but a few years past, have brought this material within the class of the ordinary materials for engineering purposes ; as railroad bars, bridges, etc. ; and has led to a very extensive series of experiments upon its resistance to the usual strains on building materials ; among the most noted of which are those of Mr. Fairbairn and of Mr. Kirkaldy.

The results of Mr. Fairbairn's experiments, *Report of the British Association*, 1867, give for the mean rupturing strain from extension 106,848 lbs. per square inch ; and for compression a mean rupturing strain of 225,568 lbs. per square inch.

From the same series of experiments upon bars deflected under moderate transverse strains the coefficient or modulus of elasticity deduced was 31,000,000 lbs. per square inch.

From the experiments already referred to by Mr. Kirkaldy, the following general conclusions were arrived at :—

1. The breaking strain of steel, when taken alone, gives no clue to the real qualities of various kinds of that metal (74).

2. The contraction of area at fracture of specimens of steel must be ascertained as well as in those of iron (74).

3. The breaking strain, *jointly* with the contraction of area, affords the means of comparing the peculiarity in various lots of specimens (74, 75).

4. Some descriptions of steel are found to be very hard,

and, consequently, suitable for some purposes, whilst others are extremely soft, and equally suitable for other uses (74, 75, 78).

5. The breaking strain and contraction of area of *puddled* steel plates, as in iron plates, are greater in the direction in which they are rolled, whereas in *cast* steel they are less (74, 75).

6. Steel invariably presents, when fractured slowly, a silky fibrous appearance; when fractured suddenly the appearance is invariably granular, in which case the fracture is always at right angles to the length; when the fracture is fibrous, the angle diverges always more or less from 90° (139).

7. The granular appearance presented by steel suddenly.

8. Steel which previously broke with a silky fibrous appearance is changed into granular by being hardened (141).

9. Steel is reduced in strength by being hardened in water, while the strength is vastly increased by being hardened in oil (161, 162, 164).

10. The higher steel is heated (without, of course, running the risk of being burned) the greater is the increase of strength, by being plunged into oil (161, 162).

11. In a highly converted or hard steel the increase in strength and in hardness is greater than in a less converted or soft steel (161, 162).

12. Heated steel, by being plunged into oil instead of water, is not only considerably *hardened*, but *toughened* by the treatment (162).

13. Steel plates hardened in oil and joined together with rivets are fully equal in strength to an unjointed soft plate, or the loss of strength by riveting is more than counter-balanced by the increase in strength by hardening in oil (163).

14. Steel rivets fully larger in diameter than those used in riveting iron plates of the same thickness being found to be greatly too small for riveting steel plates, the probability is suggested that the proper proportion for iron rivets is not, as generally assumed, a diameter equal to the thickness of the two plates to be joined (163).

15. The shearing strain of steel rivets is found to be about a fourth less than the tensile strain (163).

16. The welding of steel bars, owing to their being so easily burned by slightly overheating, is a difficult and uncertain operation (181, 15).

17. The most highly converted steel does not, as some may suppose, possess the greatest density (196).

18. In cast steel the density is much greater than in puddled steel, which is even less than in some of the superior descriptions of wrought iron (196).

From experiments made by Major Wade, late of the U. S. Ordnance Corps, the following results were obtained for the crushing weights of cast iron on the square inch :—

Not hardened.....	198,944 lbs.
Hardened ; low temper.....	354,544 “
Hardened ; mean temper.....	391,985 “
Hardened ; high temper.....	372,598 “

From contracts made by direction of Mr. James B. Eads, chief engineer of the Illinois and St. Louis bridge, at St. Louis, Missouri, the staves of the arches, the pins and plates are to be of the *crucible cast steel* of commerce. Those parts subjected to compression are to withstand 60,000 pounds on the square inch, and those subjected to a tensile strain 40,000 pounds on the square inch without permanent set, and all must stand a tensile strain of 100,000 pounds on the square inch without fracture.

The *modulus of elasticity* of the steel not to be less than 26,000,000 pounds, nor more than 30,000,000.

VIII.

STRENGTH OF COPPER.

THE various uses to which copper is applied in constructions, render a knowledge of its resistance under various circumstances a matter of great interest to the engineer.

376. Resistance to Tensile Strain. The resistance of *cast* copper on the square inch, from the experiments of Mr. G. Rennie, is 8.51 tons, that of *wrought* copper reduced per hammer at 15.08 tons. Copper wire is stated to bear 27.30 tons on the square inch. From the experiments made under the direction of the *Franklin Institute*, already cited, the mean strength of rolled sheet copper is stated at 14.35 tons per square inch.

Resistance to Compressive Strain. Mr. Rennie's experiments on cubes of one-fourth of an inch on the edge, give for the crushing weight of a cube of cast copper 7,318 lbs., and of wrought copper 6,440 lbs.

377. Effects of Temperature on Tensile Strength.—The experiments already cited of the Franklin Institute, show that the difference in strength at the lower temperatures, as between 60° and 90°, is scarcely greater than what arises from irregularities in the structure of the metal at ordinary temperatures. At 550° Fahr. copper loses *one-fourth* of its tenacity at ordinary temperatures, at 817° precisely *one-half*, and at 1000° *two-thirds*.

Representing the results of experiments by a curve of which the ordinates represent the temperatures above 32°, and the abscissas the diminutions of tenacity arising from increase of temperature, the relations between the two will be thus expressed: *the squares of the diminutions are as the cubes of the temperatures.*

IX.

STRENGTH OF OTHER METALS.

378. MR. RENNIE states the tenacity of *cast tin* at 2.11 tons per square inch; and the resistance to compression of a small cube of $\frac{1}{4}$ of an inch on an edge at 966 lbs.

In the same experiments, the tenacity of *cast lead* is stated at 0.81 tons per square inch; and the resistance of a small cube of same size as in preceding paragraph at 483 lbs.

In the same experiments, the tenacity of hard gun-metal is stated at 16.23 tons; that of fine yellow brass at 8.01 tons. The resistance to compression of a cube of brass the same as before mentioned, is stated at 10,304 lbs.

X.

LINEAR CONTRACTION AND EXPANSION OF METALS AND OTHER MATERIALS FROM TEMPERATURE.

379. Coefficients of Linear Expansion.—The change of length which takes place in a bar of any material estimated in fractional parts of its length at 0° Centigrade, for a

change in temperature of 1° Centigrade, is termed the *coefficient of linear expansion*, for the material in question.

The increase in length for other changes of temperature than 1° is given by the following formula:—

$$l = KNL,$$

in which L is the length at 0° C.; N, the number of degrees above 0° ; K, the coefficient of linear expansion; and l the increase of length due to N degrees above 0° C.

Table of Coefficients of Linear Expansion for 1° C.

DESCRIPTION OF MATERIAL.	Authority.	Coefficients of linear expansion for 1° C.
METALS.		
Antimony.....	Smeaton	000010833
Bismuth.....	“	000013916
Brass (supposed to be Hamburg plate brass)..	Ramsden	000018554
“ (English plate, in form of a rod).....	“	000018928
“ (English plate, in form of trough).....	“	000018949
“ (cast).....	Smeaton	000018750
“ (wire).....	“	000019333
Copper.....	{ Laplace & } { Lavoisier. }	000017122
“	“	000017224
Gold (de départ).....	“	000014660
“ (standard of Paris, not annealed).....	“	000015515
“ (“ “ annealed).....	“	000015136
Iron (cast).....	Ramsden	000011094
“ (from a bar cast 2 inches square).....	Adie	000011467
“ (from a bar cast $\frac{1}{2}$ an inch square).....	“	000011022
“ (soft forged).....	{ Laplace & } { Lavoisier }	000012204
“ (round wire).....	“	000012350
“ (wire).....	Troughton	000014401
Lead.....	{ Laplace & } { Lavoisier }	000028484
“	Smeaton	000028666
Palladium	Wollaston	000010000
Platina.....	Dulong & Petit	000008842
“	Troughton	000009918
Silver (of cupel).....	{ Laplace & } { Lavoisier }	000019097
“ (Paris standard).....	“	000019086
“	Troughton	000020826
Solder (white; lead 2, tin 1).....	Smeaton	000025053
“ (spelter; copper 2, zinc 1).....	“	000020583
Speculum metal.....	“	000019333

DESCRIPTION OF MATERIALS.	Authority.	Coefficients of linear expansion for 1° C.
Steel (untempered).....	{ Laplace & Lavoisier }	000010788
“ (tempered yellow, annealed at 65° C.)..	“	000012395
“ (blistered).....	Smeaton	000011500
“ (rod).....	Ramsden	000011447
Tin (from Malacca).....	{ Laplace & Lavoisier }	000019376
“ (from Falmouth).....	“	000021729
Zinc.....	Smeaton	000029416
TIMBER.		
Baywood (in the direction of the grain, dry) .	Joule	{ 00000461 to 00000566 00000428 to 00000438
Deal (in the direction of the grain, dry)	
STONE, BRICK, GLASS, CEMENT.		
Arborath pavement.....	Adie	000008985
Brick (best stock).....	“	000005502
“ (fire).....	“	000004928
Caithness pavement.....	“	000008947
Cement (Roman).....	“	000014349
Glass (English flint).....	{ Laplace & Lavoisier }	000008117
“ (French with lead).....	“	000008720
Granite (Aberdeen gray).....	Adie	000007894
“ (Peterhead red, dry).....	“	000008968
“ (“ “ moist).....	“	000009583
Greenstone (from Katho).....	“	000008089
Marble (Carrara moist).....	“	000011928
“ (“ dry).....	“	000006539
“ (black Galway).....	“	000004452
“ (black, softer specimen, containing	“	000004793
“ more fossils).....	“	000014147
“ (Sicilian, white moist).....	“	000011041
“ (“ “ dry).....	“	000011743
Sandstone (from Craigleith quarry).....	“	000010376
Slate (from Penrhyn quarry, Wales).....	“	

It has been found from experiment that the absorption of water in any manner decreases the coefficient of linear expansion in wood; and that, in some cases, in stone it increases this coefficient, whilst in others a permanent increase of length took place from an increase of temperature.

An increase in temperature of 15° C. in cast iron, and 8°

C. in wrought iron will produce a strain of one ton of 2240 lbs. on the square inch, when the two ends of the bar abut against a fixed object.

XI.

ADHESION OF IRON SPIKES TO TIMBER.

380. THE following tables and results are taken from an article by Professor Walter R. Johnson, published in the *Journal of the Franklin Institute*, Vol. 19, 1837, giving the details of experiments made by him on spikes of various forms driven into different kinds of timber.

The first series of experiments was made with Burden's plain square spike, the flanché, grooved, and swell spike, and the grooved and swelled spike. The timber was seasoned Jersey yellow pine, and seasoned white oak.

From these experiments it results, that the grooved and swelled form is about 5 per cent. less advantageous than the plain, in yellow pine, and about $18\frac{1}{2}$ per cent. superior to the plain in oak. The advantage of seasoned oak over the seasoned pine, for retaining plain spikes, is as 1 to 1.9, and for grooved spikes as 1 to 2.37.

The second series of experiments, in which the timber was soaked in water after the spikes were driven, gave the following results:—

For swelled and grooved spikes, the order of retentiveness was: 1 locust; 2 white oak; 3 hemlock; 4 unseasoned chestnut; 5 yellow pine.

For grooved spike without swell, the like order is: 1 unseasoned chestnut; 2 yellow pine; 3 hemlock.

The swelled and grooved spike was, in all cases, found to be inferior to the same spike with the swell filed off.

The third series of experiments gave the following results:

Thoroughly seasoned oak is *twice*, and thoroughly seasoned locust $2\frac{3}{4}$ times as retentive as unseasoned chestnut.

The forces required to extract spikes are more nearly proportional to the breadths than to either the thickness or the weights of the spikes. And, in some cases, a diminution of thickness with the same breadth of spike afforded a gain in retentiveness.

“In the softer and more spongy kinds of wood the fibres, instead of being forced back longitudinally and condensed upon themselves, are, by driving a thick, and especially a rather obtusely-pointed spike, folded in masses backward and downward so as to leave, in certain parts, the faces of the grain of the timber in contact with the surface of the metal.”

“Hence it appears to be necessary, in order to obtain the greatest effect, that the fibres of the wood should press the faces as nearly as possible in their longitudinal direction, and with equal intensities throughout the whole length of the spike.”

The following is the order of superiority of the spikes from that of the ratio of their weights and extracting forces respectively:—

1. Narrow flat.....	7.049	ratio of weight to extracting force.
2. Wide flat.....	5.712	“ “ “
3. Grooved but not swelled.	5.662	“ “ “
4. Grooved and not notched.	5.300	“ “ “
5. Grooved and swelled....	4.624	“ “ “
6. Burden's patent.....	4.509	“ “ “
7. Square hammered.....	4.129	“ “ “
8. Plain cylindrical.....	3.200	“ “ “

“All the experiments prove, that when a spike is once started the force required for its final extraction is much less than that which produced the first movement.”

“When a bar of iron is spiked upon wood, if the spike be driven until the bar compresses the wood to a great degree, the recoil of the latter may become so great as to start back the spike for a short distance after the last blow has been given.”

342. From the fourth series of experiments it appears, that the spike tapering gradually towards the cutting edge gives better results than those with more obtuse ends.

That beyond a certain limit the ratio of the weight of the spike to the extracting force begins to diminish; “showing that it would be more economical to increase the number rather than the length of the spikes for producing a given effect.”

“That the absolute retaining power of unseasoned chestnut on square or flat spikes of from two to four inches in length is a little more than 800 lbs. for every square inch of their two faces which condense longitudinally the fibres of the timber.”

CHAPTER III.

MASONRY.

I. CLASSIFICATION OF. II. CUT STONE MASONRY. III. RUBBLE-STONE MASONRY. IV. BRICK MASONRY. V. FOUNDATIONS OF STRUCTURES ON LAND. VI. FOUNDATIONS OF STRUCTURES IN WATER. VII. CONSTRUCTION OF MASONRY.

SUMMARY.

I.

CLASSIFICATION OF MASONRY.

Masonry defined and classified (Art. 381).

II.

CUT STONE MASONRY.

Definitions (Art. 383). Requisites of Strength (Arts. 384-390). Bonds (Arts. 391-392). Cutting (Art. 393).

III.

RUBBLE-STONE MASONRY.

Quality (Art. 394). Construction (Arts. 395-397).

IV.

BRICK MASONRY.

Construction (Arts. 398-402). Concrete Walls (Arts. 403-416).

V.

FOUNDATIONS OF STRUCTURES ON LAND.

Foundation defined (Art. 417). Importance (Art. 418). Classification of Soils (Art. 420). Foundations on Rock (Art. 421). In Stony Ground (Arts. 422-423). On Sand (Art. 424). Precautions against water (Art. 425). In Compressible Soils (Arts. 426-429). In Marshy Soils (Art. 430). On Piles (Art. 431). Pile Engines (Art. 432). Pile driving (Arts. 432-434). Load placed on piles (Arts. 435-436). Piles prepared for foundation (Arts. 437-439). On Sand (Art. 441). Precautions against Lateral Yielding (Art. 443).

VI.

FOUNDATIONS OF STRUCTURES IN WATER.

Difficulties (Art. 444). Use of Dams (Arts. 445-449). Use of Caisson (Art. 450). Artificial Island (Art. 452). Protection against running water (Arts. 454-455). Pneumatic processes (Art. 456). Pneumatic piles (Arts. 457-458). Pneumatic Caissons (Art. 459).

VII.

CONSTRUCTION OF MASONRY.

Foundation Courses (Arts. 461-463). Inverted arches (Art. 464). Component parts of structures of Masonry (Art. 467). Walls of Enclosures (Art. 468). Vertical Supports (Art. 469). Areas (Art. 470). Retaining Walls (Arts. 471-475). Form of Section of Retaining Walls (Arts. 476-478). Measures for increasing the Strength of Retaining Walls (Arts. 479-488). Counterforts (Arts. 480-483). Relieving Arches (Art. 484). Lintel (Art. 490). Plate-bande (Art. 491). Arches (Arts. 492-494). Classification of Arches (Art. 495). Cylindrical Arches (Arts. 496-502). Oblique Arch (Arts. 502-503). Groined and Cloistered Arch (Arts. 504-505). Conical Arch (Art. 506). Conoidal Arch (Arts. 507-508). Annular Arch (Art. 509). Dome (Art. 510). Arrangement of voussoirs (Arts. 511-513). Construction of Arches (Arts. 514-523). Rupture of Arches (Arts. 524-527). Precautions to be observed in constructing Arches (Arts. 528-533). Precautions against settling (Art. 534). Pointing (Arts. 535-537). Repairs of Masonry (Arts. 538-540). Effects of Temperature on Masonry (Art. 541).

I

CLASSIFICATION.

381. MASONRY is the art of raising structures, in stone, brick, and mortar.

Masonry is classified either from the nature of the material, as *stone masonry*, *brick masonry*, and *mixed*, or that which is composed of stone and brick; or from the manner in which the material is prepared, as *cut stone* or *ashlar masonry*, *rubble-stone* or *rough masonry*, and *hammered stone masonry*; or, finally, from the form of the material, as *regular masonry*, and *irregular masonry*.

II.

CUT STONE.

382. MASONRY of cut stone, when carefully made, is stronger and more solid than that of any other class; but, owing to the labor required in *dressing* or preparing the stone, it is also the most expensive. It is therefore mostly restricted to those works where a certain architectural effect is to be produced by the regularity of the masses, or where great strength is indispensable.

383. Definitions. Before explaining the means to be used to obtain the greatest strength in cut stone, it will be necessary to give a few definitions to render the subject clearer.

In a wall of masonry the term *face* is usually applied to the front of the wall, and the term *back* to the inside; the stone which forms the front, is termed the *facing*; that of the back, the *backing*; and the interior, the *filling*. If the front, or back of the wall, has a uniform slope from the top to the bottom, this slope is termed the *batter*, or *bâtir*.

The term *course* is applied to each horizontal layer of stone in the wall: if the stones of each layer are of equal thickness throughout it is termed *regular coursing*; if the thicknesses are unequal the term *random*, or *irregular coursing*, is applied. The divisions between the stones, in the courses, are

termed the *joints*; the upper surface of the stones of each course is also sometimes termed the *bed*, or *build*.

The arrangement of the different stones of each course, or of contiguous courses, is termed the *bond*.

384. Requisites of Strength. The strength of a mass of cut stone masonry will depend on the size of the blocks in each course, on the accuracy of the dressing, and on the bond used.

The size of the blocks varies with the kind of stone and the nature of the quarry. From some quarries the stone may be obtained of any required dimensions; others, owing to some peculiarity in the formation of the stone, only furnish blocks of small size. Again, the strength of some stones is so great as to admit of their being used in blocks of any size, without danger to the stability of the structure, arising from their breaking; others can only be used with safety when the length, breadth, and thickness of the block bear certain relations to each other. No fixed rule can be laid down on this point; that usually followed by builders is to make, with ordinary stone, the breadth at least equal to the thickness, and seldom greater than twice this dimension, and to limit the length to within three times the thickness. When the breadth or the length is considerable, in comparison with the thickness, there is danger that the block may break, if any unequal settling, or unequal pressure should take place. As to the absolute dimensions, the thickness is generally not less than one foot, nor greater than two; stones of this thickness, with the relative dimensions just laid down, will weigh from 1000 to 8000 pounds, allowing, on an average, 160 pounds to the cubic foot. With these dimensions, therefore, the weight of each block will require a very considerable power, both of machinery and men, to set it on its bed.

385. For the coping and top courses of a wall the same objections do not apply as to excess in length: but this excess may, on the contrary, prove favorable; because the number of top joints being thus diminished, the mass beneath the coping will be better protected, being exposed only at the joints, which cannot be made water-tight, owing to the mortar being crushed by the expansion of the blocks in warm weather, and, when they contract, being washed out by the rain.

386. The closeness with which the blocks fit is solely dependent on the accuracy with which the surfaces in contact are wrought or *dressed*; if this part of the work is done in a slovenly manner, the mass will not only present open joints from any inequality in the settling; but, from the courses not

fitting accurately on their beds, the blocks will be liable to crack from the unequal pressure on the different points of the block.

387. The surfaces of one set of joints should, as a prime condition, be perpendicular to the direction of the pressure: by this arrangement there will be no tendency in any of the blocks to slip. In a vertical wall, for example, the pressure being downward, the surfaces of one set of joints, which are the beds, must be horizontal. The surfaces of the other set must be perpendicular to these, and, at the same time, perpendicular to the face, or to the back of the wall, according to the position of the stones in the mass; two essential points will thus be attained,—the angles of the blocks, at the top and bottom of the course, and at the face or back, will be right angles, and the block will therefore be as strong as the nature of the stone will admit. The principles here applied to a vertical wall, are applicable in all cases whatever may be the direction of the pressure and the form of the exterior surfaces, whether plane or curved.

388. A modification of this principle, however, may in some cases be requisite, arising from the strength of the stone. It is laid down as a rule, drawn from the experience of builders, that no stone-work with angles less than 60° will offer sufficient strength and durability to resist accidents, and the effects of the weather. If, therefore, the batter of a wall should be greater than 60° , which is about 7 perpendicular to 4 base, the horizontal joints (Fig. 17) must not be carried out in the




Fig. 17—Represents the arrangement of stone with abutting, or elbow joints for very inclined surfaces.

A, face of the block.

c, elbow joint.

B, butress block, termed a *newell* stone.

same plane to the face or back, but be broken off at right angles to it, so as to form a small abutting joint of about 4 inches in thickness. As the batter of walls is seldom so great as this, except in some cases of sustaining walls for the side slopes of earthen embankments, this modification in the joints will not often occur; for, in a greater batter, it will generally be more economical, and the construction will be stronger, to place the stones of the exterior in offsets, the exterior stone of one course being placed within the exterior one of the course below it, so as to give the required general direction of the

batter. The arrangement with offsets has the further advantage in its favor of not allowing the rain water to lodge in the joint, if the offset be slightly bevelled off.

389. Workmen, unless narrowly watched, seldom take the pains necessary to dress the beds and joints accurately; on the contrary, to obtain what are termed *close joints*, they dress the joints with accuracy a few inches only from the outward surface, and then chip away the stone towards the back, or *tail* (Fig. 18), so that, when the block is set, it will be in con-




Fig. 18—Represents a section of a wall in which the face is of cut stone, with the tails of the blocks thinned off, and the backing of rubble.
A, section of face block.
B, rubble backing.

tact with the adjacent stones only throughout this very small extent of bearing surface. This practice is objectionable under every point of view; for, in the first place, it gives an extent of bearing surface, which, being generally inadequate to resist the pressure thrown on it, causes the block to splinter off at the joint; and in the second place, to give the block its proper set, it has to be propped beneath by small bits of stone, or wooden wedges, an operation termed *pinning-up*, or *underpinning*, and these props, causing the pressure on the block to be thrown on a few points of the lower surface, instead of being equally diffused over it, expose the stone to crack.

390. When the facing is of cut stone, and the backing of rubble, the method of thinning off the block may be allowed for the purpose of forming a better bond between the rubble and ashlar; but, even in this case, the block should be dressed true on each joint, to at least one foot back from the face. If there exists any cause which would give a tendency to an outward thrust from the back, then instead of thinning off all the blocks towards the tail it will be preferable to leave the tails of some thicker than the parts which are dressed.

391. Various methods are used by builders for the bond of cut stone. The system termed *headers* and *stretchers*, in which the vertical joints of the blocks of each course alter-

nate with the vertical joints of the courses above and below it, or, as it is termed, *break joints* with them, is the most simple, and offers, in most cases, all requisite solidity. In this




Fig. 19 is a vertical section of the sea walls used for protecting the bluffs of the islands in Boston Harbor exposed to the action of the waves.
 A, Stone facing of heavy blocks well fitted and clamped.
 B, Concrete bed and backing.
 C, Top wall well bonded.
 D, Natural soil back of concrete.

system (Fig. 20), the blocks of each course are laid alternately with their greatest and least dimensions to the face of the wall; those which present the longest dimension along the face are termed stretchers; the others, headers. If the

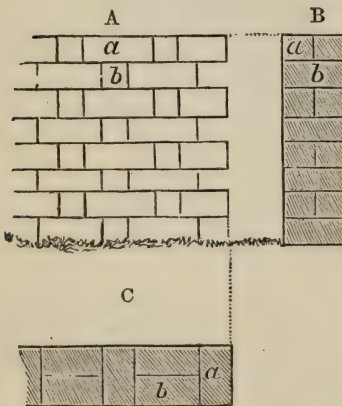


Fig 20—Represents an elevation A, end view B, and plan C, of a wall arranged as headers and stretchers.
 a, stretchers.
 b, headers.

header reaches from the face to the back of the wall, it is termed a *through*; if it only reaches part of the distance it is termed a *binder*. The vertical joints of one course are either just over the middle of the blocks of the next course below, or else, at least four inches on one side or the other of the vertical joints of that course; and the headers of one course rest as nearly as practicable on the middle of the

stretchers of the course beneath. If the backing is of rubble, and the facing of cut stone, a system of throughs or binders, similar to what has just been explained, must be used.

By the arrangement here described, the facing and backing of each course are well connected; and, if any unequal settling takes place, the vertical joints cannot open, as would be the case were they in a continued line from the top to the bottom of the mass; as each block of one course confines the ends of the two blocks on which it rests in the course beneath.

392. In masses of cut stone exposed to violent shocks, as those of which light-houses, and sea-walls in very exposed positions are formed, the blocks of each course require to be not only very firmly united with each other, but also with the courses above and below them. To effect this, various means have been used. The beds of one course are sometimes arranged with projections (Fig. 21) which fit into corresponding indentations of the next course. Iron cramps in the form of the letter S, or in any other shape that will answer the

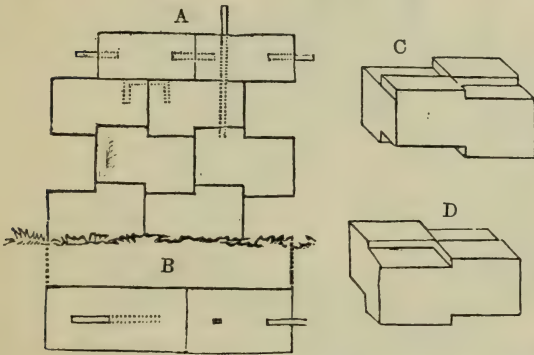


Fig. 21—Represents an elevation, A, plan, B, and perspective views, C and D, of two of the blocks of a wall in which the blocks are fitted with indentations, and connected with bolts and cramps of metal.

purpose of giving them a firm hold on the blocks, are let into the top of two blocks of the same course at a vertical joint, and are firmly set with melted lead, or with bolts, so as to confine the two blocks together. Holes are, in some cases, drilled through several courses, and the blocks of these courses are connected by strong iron bolts fitted to the holes.

The most noted examples of these methods of strengthening the bond of cut stone, are to be found in the works of the Romans which have been preserved to our time, and in two celebrated modern structures, the Eddy-stone and Bell-rock light-houses in Great Britain (Fig. 22).




Fig. 22.—Represents the manner of arranging stones of the same course by dove-tail joints and joggling, taken from a horizontal section of the masonry of the Bell-rock lighthouse.

Figs. 23, 24, 25, 26.—Plans and sections showing the masonry bond and metal fastenings of some of the courses in the Minot's ledge lighthouse.

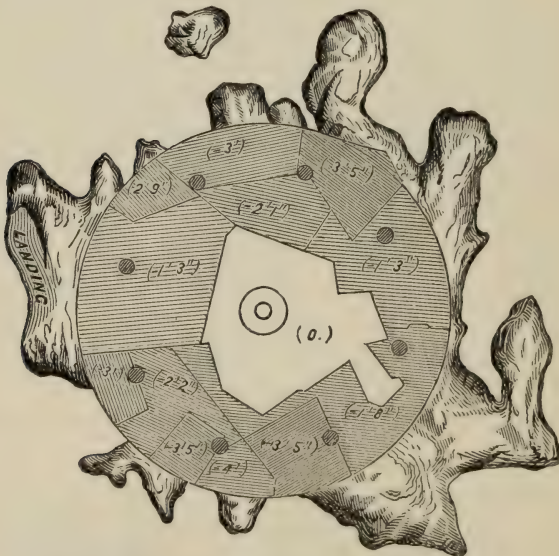


Fig. 23.—Rock surface prepared for receiving foundation.

393. The manner of dressing stone belongs to the stone-cutter's art, but the engineer should not be inattentive either to the accuracy with which the dressing is performed, or the means employed to effect it. The tools chiefly used by the workman are the chisel, axe, and hammer for *knotting*. The usual manner of dressing a surface is to cut draughts around and across the stone with the chisel, and then to use the chisel,

the axe with a serrated edge, or the knotting hammer, to work down the intermediate portions into the same surface with the draughts. In performing this last operation, the chisel and

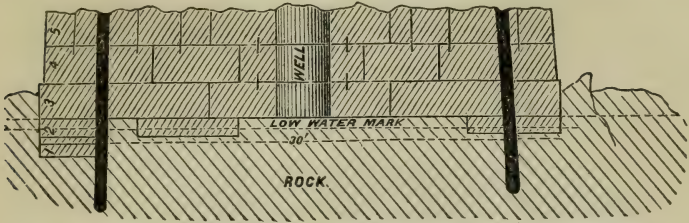


Fig. 24.—Vertical section showing foundation courses and their metal fastenings.

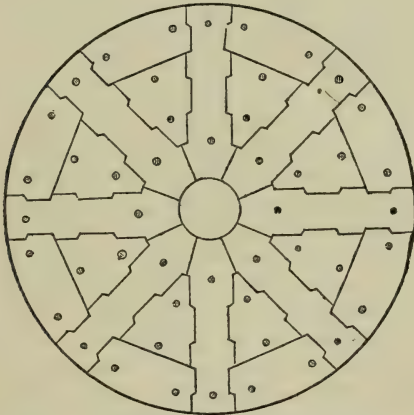


Fig. 25.—Plan showing bond of stone and fastenings above the solid foundation courses.

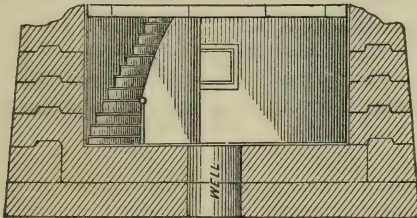


Fig. 26.—Vertical section and interior elevation above foundation courses.

axe should alone be used for soft stones, as the grooves on the surface of the hammer are liable to become choked by a soft

material, and the stone may in consequence be materially injured by the repeated blows of the workman. In hard stones this need not be apprehended.

In large blocks which require to be raised by machinery, a hole, of the shape of an inverted truncated wedge, is cut to

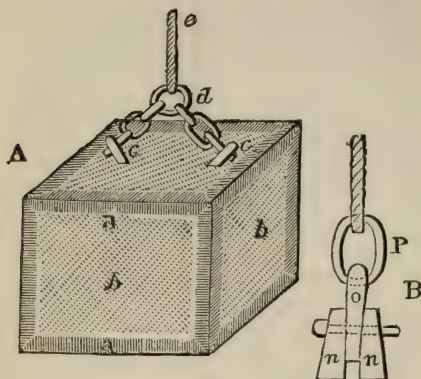


Fig. 27—Represents a perspective view, A, of a block of stone with draughts around the edges of its faces, and the intermediate space axed, or knotted, and its tackling for hoisting: also the common iron lewis, B, with its tackling.
a, draughts around edge of block.
b, knotted part between draughts.
c, iron bolts with eyes let into oblique holes cut in the block.
d and *e*, chain and rope tackling.
n, n, side pieces of the lewis.
o, centre piece of lewis with eye fastened to *n n* by a bolt.
P, iron ring for attaching tackling.

receive a small iron instrument termed a *lewis* (Fig. 27), to which the rope is attached for suspending the block; or else, two holes are cut obliquely into the block to receive bolts with eyes for the same purpose.

When a block of cut stone is to be laid, the first point to be attended to is to examine the dressing, which is done by placing the block on its bed, and seeing that the joints fit close, and the face is in its proper plane. If it be found that the fit is not accurate, the inaccuracies are marked and the requisite changes made. The bed of the course on which the block is to be laid is then thoroughly cleansed from dust, &c., and well moistened, a bed of thin mortar is laid evenly over it, and the block, the lower surface of which is first cleansed and moistened, is laid on the mortar-bed, and well settled by striking it with a wooden mallet. When the block is laid against another of the same course, the joint between them is prepared with mortar in the same manner as the bed.

III.

RUBBLE-STONE MASONRY.

394. With good mortar, rubble work, when carefully executed, possesses all the strength and durability required in structures of an ordinary character; and it is much less expensive than cut stone.

395. The stone used for this work should be prepared simply by knocking off all the sharp, weak angles of the block; it is then cleansed from dust, &c., and moistened, before placing it on its bed. This bed is prepared by spreading over the top of the lower course an ample quantity of good ordinary-tempered mortar, into which the stone is firmly embedded. The interstices between the larger masses of stone are filled in by thrusting small fragments, or chippings of stone, into the mortar. Finally, the whole course may be carefully grouted before another is commenced, in order to fill up any voids left between the full mortar and stone.

396. To connect the parts well together, and to strengthen the weak points, throughs or binders should be used in all the courses; and the angles should be constructed of cut or hammered stone. In heavy walls of rubble masonry, the precaution, moreover, should be observed, to lay the stones on their *quarry-bed*; that is, to give them the same position, in the mass of masonry, that they had in the quarry; as stone is found to offer more resistance to pressure in a direction perpendicular to the quarry-bed than in any other. The directions of the lamina in stratified stones show the position of the quarry-bed.

397. Hammered stone, or dressed rubble, is stone roughly fashioned into regular masses with the hammer. The same precautions must be taken in laying this kind of masonry as in the two preceding.

IV.

BRICK MASONRY.

398. With good brick and mortar, this masonry offers great strength and durability, arising from the strong adhesion between the mortar and brick.

399. The bond used in brick-work is very various, depending on the character of the structure. The most usual kinds are known as the *English* and *Flemish*. The first consists in arranging the courses alternately, entirely as headers or stretchers, the bricks through the course breaking joints. In the second the bricks are laid as headers and stretchers in each course. The first is stated to give a stonger bond than the last; the bricks of which, owing to the difficulty of preventing continuous joints, either in the same or different courses, are liable to separate, causing the face or the back to bulge outward. The Flemish bond presents the finer architectural appearance, and is therefore preferred for the fronts of edifices.

400. Timber and iron have both been used to strengthen the bond of brick masonry. Among the most remarkable examples of their uses are the well, faced in brick, forming an entrance to the Thames Tunnel, the celebrated work of Mr. Brunel, and his experimental arch of brick, a description of which is given in the *Civil Engineer and Architect's Journal*, No. 6, vol. I. In both these structures Mr. Brunel used pantile laths and hoop iron, in the interior of the horizontal courses, to connect two contiguous courses throughout their length. The efficacy of this method has been further fully tested by Mr. Brunel, in experiments made on the resistance to a transversal strain of a brick beam bonded with hoop iron, accounts of which, and of experiments of a like kind, are given by Colonel Pasley in his work on *Limes, Calcareous Cements, &c.*

401. The mortar-bed of brick may be either of ordinary or thin-tempered mortar; the last, however, is the best, as it makes closer joints, and, containing more water, does not dry so rapidly as the other. As brick has great avidity for water, it would always be well not only to moisten it before laying it, but to allow it to soak in water several hours before it is used. By taking this precaution, the mortar between the joints will set more firmly than when it imparts its water to the dry brick, which it frequently does so rapidly as to render the mortar pulverulent when it has dried.

402. On this point the late General Totten, Chief of Engineers, in his instructions for building brick masonry, observes: "The want of cohesion" between the brick and mortar, in the case of some gun practice against brick embrasures, "was due to the interposition of dust, sometimes quite free, but more generally composing a layer slightly cohering to the body of the bricks. The process of laying must be to cause

every brick to be thoroughly soaked in water, and to be laid the moment it ceases to drip."

403. Concrete Walls. The use of hydraulic concrete for the construction of both solid and hollow walls for houses has very much increased within a few years; and it is claimed that they are drier, stronger, and cheaper than walls of brick of equal thickness.

In some of the cheaper structures of this class put up in Paris, the concrete was composed of one part in volume of Portland cement, and from five to eight parts of clean screened gravel from the size of pearl barley to that of peas; and in some cases instead of gravel what is known as brick ballast, or the small fragments of ordinary brick from which all the fine dust is screened out, is used, taking eight parts of this to one of Portland cement.

404. For building walls of concrete where a scaffold is not necessary it is only requisite to have a boxing formed of scantling and boards of the width of the wall within, between the two sides of which the concrete is thrown in and rammed.

405. For solid walls requiring a scaffolding, what is termed Tall's bracket scaffolding is used. The concrete is laid with-




Fig. 28 represents a vertical section of the boxing for laying concrete walls.

- A, Boarding confined by clamp screws.
- B, Platform supported by brackets and clamp screws.
- C, Cylinder for forming flues in the wall.

in the boxing, which consist of boards, A, held together by clamp screws, *b*, which pass through hollow iron cones placed between the sides of the boxing, which, within, is of the same height and width as the layer of concrete to be laid at a time. When the layer is finished the boxing is taken apart, and the holes left by the cones when removed are used for securing the brackets of the scaffolding, which consists of triangular frames, B, each formed of a vertical pin, a horizontal beam to support the flooring, and an inclined strut to support the outer end of the horizontal beam. The flooring, of sufficient width for the workmen, projects beyond the wall on each side, and the two parts without and within are held together

by clamp screws which pass through the holes. When cylindrical flues are to be left within the body of the wall, a cylinder C, with a handle to it, of the requisite diameter, and the length of the thickness of the layer, is placed in position, and the concrete rammed well around it. When a new layer is to be laid the cylinder is drawn up from the one finished.

406. For constructing either solid or hollow walls, an apparatus devised by Mr. Clarke of New Haven, Conn., termed Clarke's adjustable frame for concrete building, is used. This

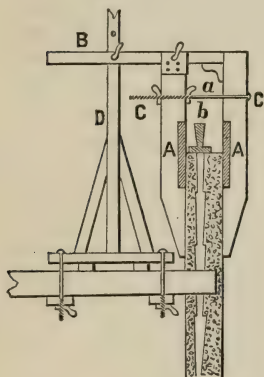


Fig. 29. Vertical section of boxing for hollow walls of concrete.

- A, Boxing confining concrete.
- B, Horizontal arm supporting the pieces C.
- D, Vertical support of B.
- a, Clamp screws confining C, C.
- b, Board used for forming the void in the wall.

consists of a boxing of boards, A, for laying the concrete which is held together by frames, each composed of a horizontal piece, B, to which are affixed two vertical clamping pieces, C, the interior piece being movable and capable of being adjusted by screws, the two pieces being held together by a clamp screw, *a*; the frames and boxing being attached to vertical supports, D, within the building, in which holes are arranged at suitable distances to admit of the frame being placed at the proper height. For hollow walls a wedge-shaped board, *b*, two inches and a half thick at its broad end, and two inches on the other, is used. This board has rectangular notches of the width of a brick, and placed at twenty inches apart, cut into the narrow edge. This forms the core for the hollow portion of the wall. The work is started or continued by placing the bricks in place lengthwise across the hollow so as to tie the exterior and interior portions of the wall together. The core is then placed with its notches fitting on the bricks, and secured in a vertical position, the concrete is filled in on each side between the sides of the boxing. When the layer is finished the core is drawn up.

For further applications of *Coignet Béton*, see *Prof. Barnard's Report on the Paris Exposition of 1867*, and *Gen. Gilmore's Paper*, No. 19, on *Béton Aggloméré*.

407. Uses of beton agglomeré in Europe and elsewhere. The most important and costly work that has yet been undertaken in this material is a section, thirty-seven miles in length, of the Vanne aqueduct, for supplying water to the city of Paris.

This aqueduct, which traverses the forest of Fontainebleau through its entire length, comprises two and a half to three miles of arches, some of them as much as fifty feet in height, and eleven miles of tunnels, nearly all constructed of the material excavated, the impalpable sand of marine formation known under the generic name of Fontainebleau sand. It includes, also, eight or ten bridges of large span (seventy-five to one hundred and twenty-five feet) for the bridging of rivers, canals, and highways.

The smaller arches are full centre, and are generally of a uniform span of $39\frac{37}{100}$ feet, with a thickness at the crown of $15\frac{3}{4}$ inches. Their construction was carried on without interruption through the winter of 1868-'69 and the following summer, and the character of the work was not affected by either extreme of temperature. The spandrels are carried up in open work to the level of the crown, and upon the arcade thus prepared the aqueduct pipe is moulded in the same material, the whole becoming firmly knit together into a perfect monolith. The pipe is circular, $6\frac{1}{2}$ feet in interior diameter, with a thickness of 9 inches at the top, and 12 inches at the sides, at the water surface. The construction of the arches is carried on about two weeks in advance of work on the pipe, and the centres are struck about a week later.

Water was let into a portion of this pipe in the spring of 1869, and M. Belgrand, inspector-general of bridges and highways, and director of drainage and sewers of the city of Paris, certified that "*the impermeability appeared complete.*"

408. Another interesting application of this material has been made in the construction, completed or very nearly so, of the light-house at Port Said, Egypt. It will be one hundred and eighty feet high, without joints, and resting upon a monolithic block of *béton*, containing nearly four hundred cubic yards.

409. An entire Gothic church, with its foundations, walls, and steeple in a single piece, has been built of this material at Vesinet, near Paris. The steeple is one hundred and

thirty feet high, and shows no cracks or other evidences of weakness.

M. Pallu, the founder, certifies that "during the two years consumed by M. Coignet in the building of this church, the *béton aggloméré*, in all its stages, was exposed to rain and frost, and that it has perfectly resisted all variations of temperature."

The entire floor of the church is paved with the same material, in a variety of beautiful designs, and with an agreeable contrast of colors.

410. In constructing the municipal barracks of Notre Dame, Paris, the arched ceilings of the cellars were made of this *béton*, each arch being a single mass. The spans varied from twenty-two to twenty-five feet, the rise, in all cases, being one-tenth the span, and the thickness at the crown 8.66 inches. In the same building the arched ceilings of the three stories of galleries, one above the other, facing the interior, and all the subterranean drainage, comprising nearly six hundred yards of sewers, are also monoliths of *béton*.

411. Over thirty-one miles of the Paris sewers had been laid in this material prior to June, 1869, at a saving of 20 per cent., on the lowest estimated cost, in any other kind of masonry.

The composition of the *béton* was as follows:—

Sand, 5 measures.

Hydraulic lime, 1 measure.

Paris cement (said to be as good as Portland cement), $\frac{1}{2}$ measure.

412. The works above referred to were visited by the writer in the month of February, 1870, and these statements are based upon close observation and personal knowledge.

Many other interesting applications of this material were examined, of which it is not deemed necessary to make any special mention, except that in combined stability, strength, beauty, and cheapness they far surpass the best results that could have been achieved by the use of any other materials, whether stone, brick, or wood.

In the numerous and varied applications which have been made of it in France, it has received the most emphatic commendations from the government engineers and architects.

413. Its superiority to Rosendale concrete for common work, such as foundations, the backing and hearting of walls, magazine walls, and generally for all masonry protected by earth, and therefore not necessarily required to be of first

quality, lies in its possessing greater strength and hardness at the same cost, and consequently in its being proportionately cheaper when reduced to the same strength by increasing the proportion of sand.

414. Sea-water is nearly as good as fresh water for mixing Portland cements, but injures the Rosendale and all argillo-magnesian cements very considerably.

415. It is of great importance that the incorporation of the lime with the cement should be very thorough, in order to insure a perfectly homogeneous mixture, and this can be obtained with greater certainty by triturating the two together into a thick, viscous paste before the sand is added. In conducting extensive operations the use of two mills of different sizes would perhaps be advantageous, the smaller one being employed exclusively in the preparation of the matrix.

The following proportions may be relied upon to give Coignet bétons of good average quality:—

	1	2	3	4
Coarse and fine sand, by measure	6	6½	7	7½
Portland cement, by measure.....	1	1	1	1
Common lime-powder, by measure.....	$\frac{4}{10}$	$\frac{1}{2}$	$\frac{2}{4}$	$\frac{8}{10}$

416. For foundations and other plain massive work not exposed to view, or where a smooth surface is not specially desired, a liberal amount of gravel and pebbles, or broken stone, may be added to all of the bétons of the above table.

The following proportions will answer for such purposes:—

	1	2	3	4
Coarse and fine sand, by measure	6	6½	7	7½
Gravel and pebbles, by measure.....	12	13	13	14
Portland cement, by measure.....	1	1	1	1
Common lime-powder, by measure.....	$\frac{4}{10}$	$\frac{1}{2}$	$\frac{2}{4}$	$\frac{8}{10}$

See *General Gilmore's Report*.

V.

FOUNDATIONS OF STRUCTURES ON LAND.

417. The term *foundation* is used indifferently either for the lower courses of a structure of masonry, or for the artificial arrangement, of whatever character it may be, on which these courses rest. For more perspicuity, the term *bed of the foundation* will be used in this work when the latter is designated.

418. The strength and durability of structures of masonry depend essentially upon the bed of the foundation. In arranging this, regard must be had not only to the permanent efforts which the bed may have to support, but to those of an accidental character. It should, in all cases, be placed so far below the surface of the soil on which it rests, that it will not be liable to be uncovered, or exposed; and its surface should not only be normal to the resultant of the efforts which it sustains, but this resultant should intersect the base of the bed so far within it, that the portion of the soil between this point of intersection and the outward edge of the base shall be broad enough to prevent its yielding from the pressure thrown on it.

419. The first preparatory step to be taken, in determining the kind of bed required, is to ascertain the nature of the subsoil on which the structure is to be raised. This may be done, in ordinary cases, by sinking a pit; but where the subsoil is composed of various strata, and the structure demands extraordinary precaution, borings must be made with the tools usually employed for this purpose.

420. **Classification of Soils.**—With respect to foundations, soils are usually divided into three classes:

The 1st class consists of soils which are incompressible, or, at least, so slightly compressible, as not to affect the stability of the heaviest masses laid upon them, and which, at the same time, do not yield in a lateral direction. Solid rock, some tufas, compact stony soils, hard clay which yields only to the pick or to blasting, belong to this class.

The 2d class consists of soils which are incompressible, but require to be confined laterally, to prevent them from spreading out. Pure gravel and sand belong to this class.

The 3d class consists of all the varieties of compressible soils; under which head may be arranged ordinary clay, the

common earths, and marshy soils. Some of this class are found in a more or less compact state, and are compressible only to a certain extent, as most of the varieties of clay and common earth; others are found in an almost fluid state, and yield, with facility, in every direction.

421. Foundations on Rock.—To prepare the bed for a foundation on rock, the thickness of the stratum of rock should first be ascertained, if there are any doubts respecting it: and if there is any reason to suppose that the stratum has not sufficient strength to bear the weight of the structure, it should be tested by a trial weight, at least twice as great as the one it will have to bear permanently. The rock is next properly prepared to receive the foundation courses by leveling its surface, which is effected by breaking down all projecting points, and filling up cavities, either with rubble masonry or with *béton*; and by carefully removing any portions of the upper stratum which present indications of having been injured by the weather. The surface, prepared in this manner, should, moreover, be perpendicular to the direction of the pressure; if this is vertical, the surface should be horizontal, and so for any other direction of the pressure. Should there, however, be any difficulty in so arranging the surface as to have it normal to the resultant of the pressure, it may receive a position such that one component of the resultant shall be perpendicular to it, and the other parallel; the latter being counteracted by the friction and adhesion between the base of the bed and the surface of the rock. If, owing to a great declivity of the surface, the whole cannot be brought to the same level, the rock must be broken into steps, in order that the bottom courses of the foundation throughout, may rest on a surface perpendicular to the direction of the pressure. If fissures or cavities are met with, of so great an extent as to render the filling them with masonry too expensive, an arch must then be formed, resting on the two sides of the fissure, to support that part of the structure above it.

The slaty rocks require most care in preparing them to receive a foundation, as their top stratum will generally be found injured to a greater or less depth by the action of frost.

422. Foundations in Stony Ground.—In stony earths and hard clay, the bed is prepared by digging a trench wide enough to receive the foundation, and deep enough to reach the compact soil which has not been injured by the action of frost; a trench from 4 to 6 feet will generally be deep enough for this purpose.

423. In compact gravel and sand, where there is no lia-

bility to lateral yielding, either from the action of rain or any other cause, the bed may be prepared as in the case of stony earths. If there is danger from lateral yielding, the part on which the foundation is to rest must be secured by confining it laterally by means of sheeting piles, or in any other way that will offer sufficient security.

424. Foundations on Sand.—In laying foundations on firm sand, a further precaution is sometimes resorted to, of placing a platform on the bottom of the trench, for the purpose of distributing the whole weight more uniformly over it. This, however, seems to be unnecessary; for if the bottom courses of the masonry are well settled in their bed, there is no good reason to apprehend any unequal settling from the effect of the superincumbent weight: whereas, if the wood of the platform should, by any accident, give way, it would leave a part of the foundation without any support.

When the sand under the bed is liable to injury from springs they must be cut off, and a platform, or, still better, an area of *béton*, should compose the bed, and this should be confined on all sides between walls of stone, or *béton* sunk below the bottom of the bed.

425. Precautions against Water.—If, in opening a trench in sand, water is found at a slight depth, and in such quantity as to impede the labors of the workmen, and the trench cannot be kept dry by the use of pumps or scoops, a row of sheeting piles must be driven on each side of the space occupied by it, somewhat below the bottom of the bed, the sand on the outside of the sheeting piles be thrown out, and its place filled with a puddling of clay, to form a water-tight enclosure round the trench. The excavation for the bed is then commenced; but if it be found that the water still makes rapidly at the bottom, only a small portion of the trench must be opened, and after the lower courses are laid in this portion, the excavation will be gradually effected, as fast as the workmen can execute the work, without difficulty from the water.

426. Foundations in Compressible Soils. The beds of foundations in compressible soils require peculiar care, particularly when the soil is not homogeneous, presenting more resistance to pressure in one point than in another; for, in that case, it will be very difficult to guard against unequal settling.

427. In ordinary clay, or earth, a trench is dug of the proper width, and deep enough to reach a stratum beyond the action of frost; the bottom of the trench is then levelled off

to receive the foundation. This may be laid immediately on the bottom, or else upon a *grillage* and *platform*. In the first case, the stones forming the lowest course should be firmly settled in their beds, by ramming them with a very heavy beetle. In the second a timber grating, termed a grillage (Fig. 30), which is formed of a course of heavy beams laid lengthwise in the trench, and connected firmly by cross pieces into which they are notched, is firmly settled in the bed, and the earth is solidly packed between the longitudinal and cross pieces; a flooring of thick planks, termed a platform, is then laid on the grillage, to receive the lowest course




Fig. 30 represents the arrangement of a grillage and platform fitted on piles.

A, masonry.
 aa, piles.
 b, string-pieces.
 c, cross pieces.
 d, capping-piece.
 e, platform of plank.

of the foundation. The object of the grillage and platform is to diffuse the weight more uniformly over the surface of the trench, to prevent any part from yielding.

428. Repeated failures in grillages and platforms, arising either from the compression of the woody fibre or from a transversal strain occasioned by the subsoil offering an unequal resistance, have impaired confidence in their efficacy. Engineers now prefer beds formed of an area of *béton*, as offering more security than any bed of timber, either in a uniformly or unequally compressible soil.

429. The preparation of an area of *béton* for the bed of a foundation, will depend on the circumstances of the case. In ordinary cases the *béton* is thrown into the trench, and carefully rammed in layers of 6 or 9 inches, until the mortar collects in a semi-fluid state on the top of the layer. If the base of the bed is to be broader than the top, its sides must be confined by boards suitably arranged for this purpose. Whenever a layer is left incomplete at one end, and another is laid upon it, an offset should be left at the unfinished ex-

tremity, for the purpose of connecting the two layers more firmly when the work on the unfinished part is resumed.

Considerable economy may be effected, in the quantity of *béton* required for the bed, by using large blocks of stone which should be so distributed throughout the layer that the beetle will meet with no difficulty in settling the *béton* between and around the blocks.

When springs rise through the soil over which the *béton* is to be spread, the water from them must either be conveyed off by artificial channels, which will prevent it rising through the mass of *béton* and washing out the lime; or else strong cloth, prepared so as to be impermeable to water, may be laid over the surface of the soil to receive the bed of *béton*.

The artificial channels for conveying off the water may be formed either of stone blocks with semi-cylindrical channels cut in them, or of semi-cylinders of iron, or tiles, as may be most convenient. A sufficient number of these channels should be formed to give an outlet to the water as fast as it rises.

An impermeable cloth may be formed of stout canvas, prepared with bituminous pitch and a drying oil. It is well to have the cloth doubled on each side with ordinary canvas to prevent accidents. The manner of settling the cloth on the surface of the soil must depend on the circumstances of the case.

Each of the foregoing expedients for preventing the action of springs on an area of *béton* has been tried with success. When artificial channels are used, they may be completely choked subsequently, by injecting into them a semi-fluid hydraulic cement, and the action of the springs be thus destroyed.

Foundation beds of *béton* are frequently made without exhausting the water from the area on which they are laid. For this purpose the *béton* is thrown in layers over the area, by using either a wooden conduit reaching nearly to the position of the layer, or else by placing the *béton* (Fig. 31) in a box by which it is lowered to the position of the layer, and from which it is deposited so as not to permit the water to separate the lime from the other ingredients.

A conduit for immersing hydraulic concrete, formed of boiler iron, has been used on some of our public works. The body of it is cylindrical, and made in sections which can be readily successively fastened on or detached; the bottom, having the form of a conical frustum, is fastened to the lowest section of the body. The conduit is suspended vertically

from a movable crane, or crab engine, by a strong screw, by which it can be raised or lowered, so as to admit the concrete to escape from the body through the conical-shaped end, to be spread and compressed by the movements of the crane and screw.

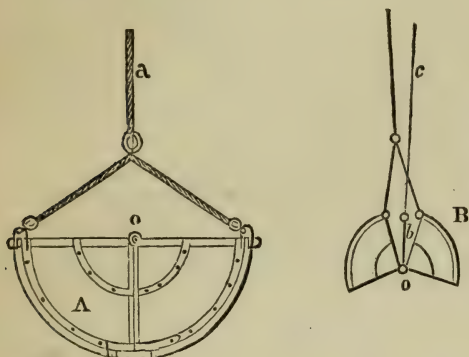


Fig. 31 represents an end view, A, of a semi-cylindrical box for lowering *béton* in water, and B the same view of the box when opened to let the *béton* fall through.

o, hinge around which the halves of the box open.
a, rope tacking for lowering box.

b, pin, or catch to fasten the two parts of the box.
c, cord to detach the pin and open the box.

Should it be found that springs boil up at the bottom, it must be covered with an impermeable cloth.

430. Foundations in Marshy Soils. In marshy soils the principal difficulty consists in forming a bed sufficiently firm to give stability to the structure, owing to the yielding nature of the soil in all directions.

The following are some of the dispositions that have been tried with success in this case. Short piles from 6 to 12 feet long, and from 6 to 9 inches in diameter, are driven into the soil as close together as they can be crowded, over an area considerably greater than that which the structure is to occupy. The heads of the piles are accurately brought to a level to receive a grillage and platform; or else a layer of clay, from 4 to 6 feet thick, is laid over the area thus prepared with piles, and is either solidly rammed in layers of a foot thick, or submitted to a very heavy pressure for some time before commencing the foundations. The object of preparing the bed in this manner is to give the upper stratum of the soil all the firmness possible, by subjecting it to a strong compression from the piles; and when this has been effected, to procure a firm bed for the lowest course of the foundation by the grillage, or clay bed; by these means the whole pressure will be uniformly distributed throughout the entire area. This case is also one in which a bed of *béton* would replace, with great advantage, either the one of clay, or the grillage.

The purposes to which the short piles are applied in this case is different from the object to be attained usually in the employment of piles for foundations ; which is to transmit the weight of the structure that rests on the piles, to a firm incompressible soil, overlaid by a compressible one, that does not offer sufficient firmness for the bed of the foundation.

431. Foundations on Piles. When a firm soil is overlaid by one of a compressible character, and its distance below the surface is such that it can be reached by piles of ordinary dimensions, they should be used in preference to any other plan, when they can be rendered durable, on account of their economy and the security they afford.

To prepare the bed to receive the foundations in this case, strong piles are driven, at equal distances apart, over the entire area on which the structure is to rest. These piles are driven until they meet with a firm stratum below the compressible one, which offers sufficient resistance to prevent them from penetrating farther.


Piles are generally from 9 to 18 inches in diameter, with a length not above 20 times the diameter, in order that they may not bend under the stroke of the ram. They are prepared for driving by stripping them of their bark, and paring down the knots, so that the friction, in driving, may be reduced as much as possible. The head of the pile is usually encircled by a strong hoop of wrought iron, to prevent the pile from being split by the action of the ram. The foot of the pile may receive a *shoe* formed of ordinary boiler iron, well fitted and spiked on ; or a cast-iron shoe of a suitable form for penetrating the soil may be cast around a wrought-iron bolt, by means of which it is fastened to the pile.



Fig. 32 represents a section through the axis of a cast-iron shoe and wrought-iron bolt for a pile.

432. Screw Piles. In localities where it has been found impracticable to resort to any of the usual means of foundations, as on sandpits, or on beds of a soft conglomerate formed of shells, clay, and the oxide of iron, such as are found on our Southern coasts, iron screw piles have been used with success, particularly for light-house structures of iron.

These piles have the screws of different forms according to the soil they are to be used in. The point being little or nothing, and the thread of the screw very broad, for loose

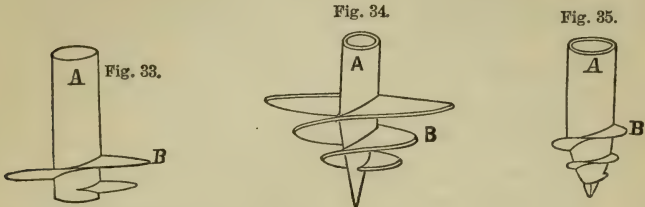

Figs. 33, 34, 35. Elevations of screw piles for loose, firm and hard or rocky soil respectively. A, newel; B, thread of screw.

soils; the point becoming sharper and the thread of the screw more narrow as the soil becomes harder.

Disk Piles. In some parts of India this species of pile has been advantageously employed.




Fig. 36. Elevation of a disk pile. A, shaft; B, disc; C, water-hole.

These piles are made hollow of iron, and have a circular disk attached to the foot. A hole is made in the disk to allow water to pass through.

Pile Engines. A machine, termed a *pile engine*, is used for driving piles. It consists essentially of two uprights firmly connected at top by a cross piece, and of a *ram*, or *monkey* of cast iron, for driving the pile by a force of percussion. Two kinds of engines are in use; the one termed a *crab engine*, from the machinery used to hoist the ram to the height from which it is to fall on the pile; the other the *ringing engine*, from the monkey being raised by the sudden pull of several men upon a rope, by which the ram is drawn up a few feet to descend on the pile.

The crab engine is by far the more powerful machine, but on this account is inapplicable in some cases, as in the driving

of cast-iron piles, where the force of the blow might destroy the pile; also in long slender piles it may cause the pile to spring so much as to prevent it from entering the subsoil.

The *steam pile driver* is but a modification of the *crab engine*.

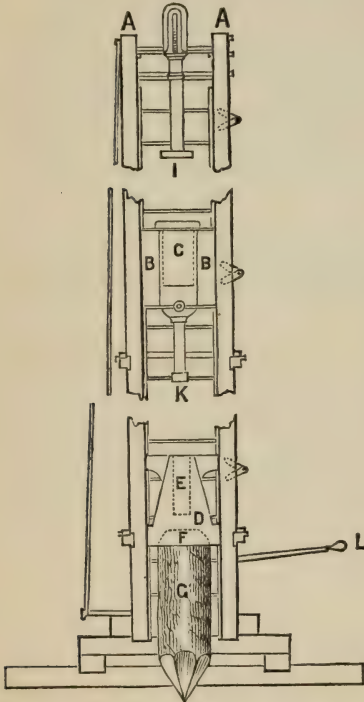


Fig. 37 represents a front elevation of the gunpowder pile driver.

AA, guides.

B, ram.

C, socket in which piston I fits.

D, cast-iron cylinder containing powder chamber E.

F, socket to fit on head of pile.

G, pile.

K, plunger of ram.

L, lever to hold ram at any point on the guides.

Shaw's *gunpowder pile driver* consists essentially of two uprights or guides, between which are placed the ram and powder chamber. The latter consists of a cast-iron cylinder, having a socket in its lower end, and a powder chamber at the upper. The ram differs from that in ordinary use only by having a plunger made to fit the powder chamber, at the bottom, and a cylindrical cavity at top, extending about half way down. At any convenient point on the guides is placed a piston made to fit into the ram, to take the place of an air-cushion in taking up the recoil, in case the charge should be too great.

Work is begun by placing the powder chamber on top of

the pile to be driven, putting a cartridge in the chamber, and allowing the ram to fall. The explosion of the cartridge throws the ram up and drives the pile down proportionally. Another cartridge is thrown in and the operation repeated. The only limit to the rapidity of the blows is the size of the cartridges and the rapidity with which they are supplied.

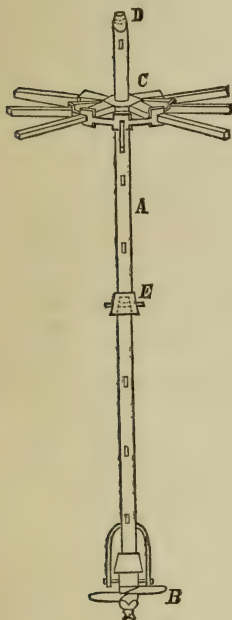


Fig. 38 represents the capstan for driving screw piles by hand.
 A, shaft of pile.
 B, screw.
 C, capstan.
 D, taper of shaft to fit into socket of next section above.
 E, bolt fastening socket of shaft to taper of next section below.

For driving screw-piles a capstan is fitted to the head of the pile, and motion communicated to the pile either by men taking hold of the capstan bars and walking around with them, or by attaching an endless rope or chain to the extremities of the bars, and setting it in motion by machinery.

For setting disk-piles, water is forced down through the hole in the disk, and produces a scour from under the pile which gradually sinks to its place.

The manner of driving piles, and the extent to which they may be forced into the subsoil, will depend on local circumstances. It sometimes happens that a heavy blow will effect less than several slighter blows, and that piles after an interval between successive volleys of blows can with difficulty be

started at first. In some cases the pile breaks below the surface, and continues to yield to the blows by the fibres of the lower extremity being crushed. These difficulties require careful attention on the part of the engineer. Piles should be driven to an unyielding subsoil. The French civil engineers have, however, adopted a rule to stop the driving when the pile has arrived at its *absolute stoppage*, this being measured by the further penetration into the subsoil of about $\frac{2}{10}$ ths of an inch, caused by a volley of thirty blows from a ram of 800 lbs., falling from a height of 5 feet at each blow.

433. If the head of a pile has to be driven below the level to which the ram descends, another pile, termed a *punch*, is used for the purpose. A cast-iron socket of a suitable form embraces the head of the pile and the foot of the punch, and the effect of the blow is thus transmitted through the punch to the pile.

434. When a pile, from breaking or any other cause, has to be drawn out, it is done by using a long beam as a lever for the purpose; the pile being attached to the lever by a chain or rope, suitably adjusted.

435. The number of piles required will be regulated by the weight of the structure. Where the piles are driven to a firm subsoil, they may be subjected to a working strain of 1000 pounds to the square inch of cross section at top. In the contrary case, and where the resistance offered results mainly from that of friction on the exterior of the piles, the working strain should be reduced to 200 pounds to the square inch. The least distance apart at which the piles can be driven with ease is about $2\frac{1}{2}$ feet between their centres. If they are more crowded than this, they may force each other up as they are successively driven. When this is found to take place, the driving should be commenced at the centre of the area, and the pile should be driven with the butt end downward.

436. From experiments carefully made in France, it appears that piles which resist only in virtue of the friction arising from the compression of the soil, cannot be subjected with safety to a load greater than one-fifth of that which piles of the same dimensions will safely support when driven into a firm soil.

437. After the piles are driven, they are sawed off to a level, to receive a grillage and platform for the foundation. A large beam, termed a *capping*, is first placed on the heads of the outside row of piles, to which it is fastened by means of wooden pins, or *tree-nails*, driven into an auger-hole made

through the cap, into the head of each pile. After the cap is fitted, longitudinal beams, termed *string-pieces*, are laid lengthwise on the heads of each row, and rest at each extremity on the cap, to which they are fastened by a dove-tail joint and a wooden pin. Another series of beams, termed *cross-pieces*, are laid crosswise on the string-pieces, over the heads of each row of piles. The cross and string pieces are connected by a notch cut into each, so that, when put together, their upper surfaces may be on the same level, and they are fastened to the heads of the piles in the same manner as the capping. The extremities of the cross-pieces rest on the capping, and are connected with it like the string-pieces.

The platform is of thick planks laid over the grillage, with the extremity of each plank resting on the capping, to which, and to the string and cross pieces, the planks are fastened by nails.

The capping is usually thicker than the cross and string pieces by the thickness of the plank; when this is the case, a rabate, about four inches wide, must be made on the inner edge of the capping, to receive the ends of the planks.

438. An objection is made to the platform as a bed for the foundation, owing to the want of adhesion between wood and mortar; from which, if any unequal settling should take place, the foundations would be exposed to slide off the platform. To obviate this, it has been proposed to replace the grillage and platform by a layer of *béton* resting partly on the heads of the piles, and partly on the soil between them. This means would furnish a firm bed for the masonry of the foundations, devoid of the objections made to the one of timber.

To counteract any tendency to sliding, the platform may be inclined if there is a lateral pressure, as in the case, for example, of the abutments of an arch.

439. In soils of alluvial formation, it is common to meet with a stratum of clay on the surface, underlaid with soft mud, in which case the driving of short piles would be injurious, as the tenacity of the stratum of clay would be destroyed by the operation. It would be better not to disturb the upper stratum in this case, but to give it as much firmness as possible, by ramming it with a heavy beetle, or by submitting it to a heavy pressure.

The piers of the bridge over the Seekonk river are formed of clusters of piles driven through the mud to a firm subsoil.

These piles are of hard Southern or yellow pine, hewn to twelve or fourteen inches square, according to the size of the

stick, throughout their whole length. They are arranged in groups of twelve, except in five clusters under the draw. Eight of the piles in the clusters of twelve have their outside corners taken off to allow the flanges of the cylinders to pass

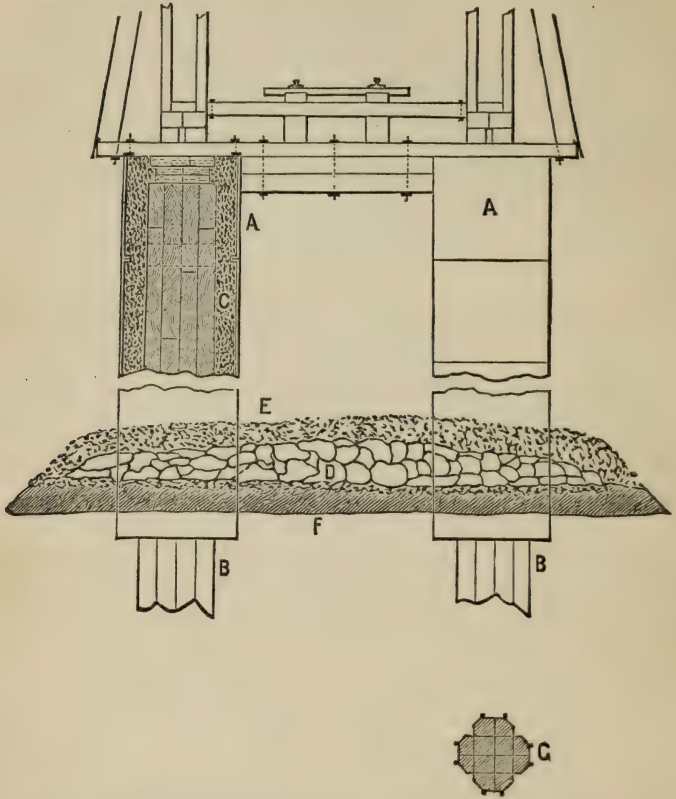


Fig. 39 represents a section and elevation of a pier of the Seekonk river bridge.

- A, outside cover of metal.
- B, clusters of wooden piles.
- C, inside filling of concrete.
- D, loose stone.
- E, slag.
- F, crust of shells.
- G, cross section of wooden clusters.

down by them. The piles forming each of these clusters are firmly bolted together with inch and a quarter bolts. These clusters are incased with cast-iron cylinders, extending from ten inches above the piling in the draw pier, and sixteen or

twenty inches in the others, to four and six feet below the top of the crust. The cylinders are six and five feet in diameter for the large and small clusters, and the void space left between them and the clusters is filled in with good concrete.

440. Piles and sheeting piles of cast iron have been used with complete success in England, both for the ordinary purposes of cofferdams, and for permanent structures for wharfing. The piles have been cast of a variety of forms; in some cases they have been cast hollow for the purpose of excavating the soil within the pile as it was driven, and thus facilitate its penetration into the subsoil. Fig. 40 represents a horizontal section of one of the more recent arrangements of iron piles and sheeting piles.

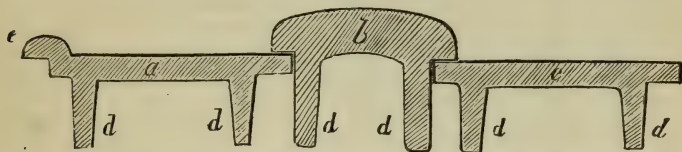


Fig. 40 represents a horizontal section of an arrangement of piles and sheeting piles of cast iron.

- a*, sheeting pile with a lap *e* to cover the joint between it and the next sheeting pile.
- b*, piles with a lap on each side.
- c*, sheeting pile lapped by pile and sheeting pile next it.
- d*, ribs of piles and sheeting piles.

441. Sand has also been used with advantage to form a bed for foundations in a very compressible soil. For this purpose a trench is (Fig. 40) excavated, and filled with sand; the sand being spread in layers of about 9 inches, and each layer being firmly settled by a heavy beetle, before laying the next. If




Fig. 41 represents a section of a sand foundation bed and the masonry upon it.
A, sand bed in a trench.
B, masonry.

water should make rapidly in the trench, it would not be practicable to pack the sand in layers. Instead, therefore, of

opening a trench, holes about 6 feet deep, and 6 inches in diameter (Fig. 42), should be made by means of a short pile, as close together as practicable; when the pile is withdrawn from the hole it is immediately filled with sand. To cause the sand to pack firmly, it should be slightly moistened before placing it in the holes or trench.

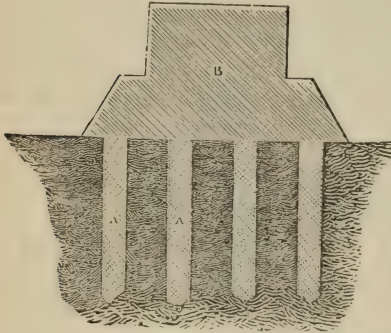


Fig. 42.—Represents a section of a foundation bed made by filling holes with sand.

A, holes filled with sand.
B, masonry.

Sand, when used in this way, possesses the valuable property of assuming a new position of equilibrium and stability, should the soil on which it is laid yield at any of its points. Not only does this take place along the base of the sand bed, but also along the edges, or sides, when these are enclosed by the sides of the trench made to receive the bed. This last point offers also some additional security against yielding in a lateral direction. The bed of sand must, in all cases, receive sufficient thickness to cause the pressure on its upper surface to be distributed over the entire base.

442. When, from the fluidity of the soil, the vertical pressure of the structure causes the soil to rise around the bed, this action may be counteracted either by scooping out the soil to some depth around the bed and replacing it by another of a more compact nature, well rammed in layers, or with any rubbish of a solid character; or else a mass of loose stone may be placed over the surface exterior to the bed, whenever the character of the structure will warrant the expense.

443. **Precautions against Lateral Yielding.** The soils which have been termed compressible, strictly speaking, yield only by the displacement of their particles either in a lateral direction, or upward around the structure laid upon them. Where this action arises from the effect of a vertical weight, uniformly distributed over the base of the bed, the preceding

methods for giving permanent stability to structure present all requisite security. But when the structure is subjected also to a lateral pressure, as, for example, that which would arise from the action of a bank of earth resting against the back of a wall, additional means of security are demanded.

One of the most obvious expedients in this case is to drive a row of strong square piles in juxtaposition immediately in contact with the exterior edges of the bed. This expedient is, however, only of service where the piles attain either an incompressible soil, or one at least firmer than that on which the bed immediately rests. For otherwise, as is obvious, the piles only serve to transmit the pressure to the yielding soil in contact with them. But where they are driven into a firm soil below, they gain a fixed point of resistance, and the only insecurity they offer is either by the rupture of the piles, from the cross strain upon them, or from the yielding of the firm subsoil, from the same cause.

In case the piles reach a firm subsoil, it will be best to scoop out the upper yielding soil before driving the piles and to fill in between and around them with loose broken stone (Fig. 43). This will give the piles greater stiffness, and effectually prevent them from spreading at top.

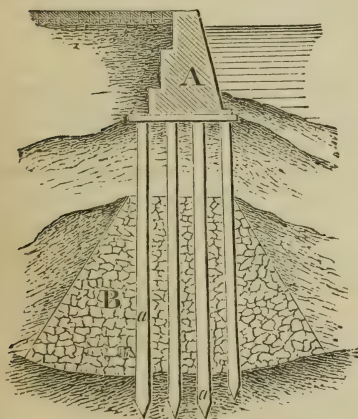


Fig. 43—Represents the manner of using loose stone to sustain piles and prevent them from yielding laterally.

A, section of the masonry.

B, loose stone thrown around the piles, *a*.

When the piles cannot be secured by attaining a firm subsoil, it will be better to drive them around the area at some distance from the bed, and, as a further precaution, to place horizontal buttresses of masonry at regular intervals from the bed to the piles. By this arrangement some additional security is gained from the counter-pressure of the soil enclosed

between the bed and the wall of piles. But it is obvious that unless the piles in this case are driven into a firmer soil than that on which the structure rests, there will still be danger of yielding.

In using horizontal buttresses, the stone of which they are constructed should be dressed with care; their extremities near the wall of piles should be connected by horizontal arches (Fig. 44), to distribute the pressure more uniformly; and where there is an upward pressure of the soil around the structure, arising from its weight, the buttresses ought to be in the form of reversed arches.

In buttresses of this kind, as likewise in broad areas resting on a very yielding soil, since as much danger is to be apprehended from their breaking by their own weight as from any other cause, it must be carefully guarded against. Something may be done for this purpose by ramming the earth around the structure with a heavy beetle, when it can be made more compact by this means; or else a part of the upper soil may be removed, and be replaced by one of a more compact nature which may be rammed in layers.

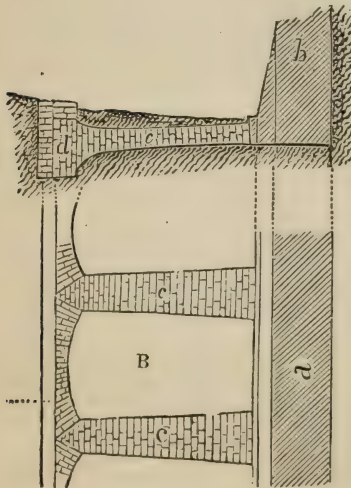


Fig. 44 represents the manner of preventing a sustaining wall from yielding laterally to a thrust behind it, by using horizontal buttresses of reversed arches abutting against vertical counter-arches.

A, vertical section of wall, buttresses, and counter-arches.

B, plan of wall, buttresses, and counter-arches.

a, plan of wall.

b, section of do.

c, buttresses.

d, counter-arches.

The following methods, where they can be resorted to, and where the character of the structure will justify the expense, have been found to offer the best security in the case in question.

When the bed can be buttressed in front with an embank-

ment, a low counter-wall (Fig. 45) may be built parallel to the edge of the bed, and some 10 or 12 feet from it; between this wall and the bed a reversed arch connecting the two may be built, and a surcharge of earth of a compact character and well rammed, may be placed against the counter-wall to act by its counter-pressure against the lateral pressure upon the bed.

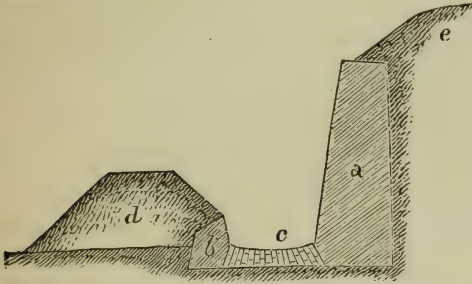


Fig. 45 represents the manner of buttressing a sustaining wall in front by the action of a counter-pressure of earth transmitted to the wall by a reversed arch.

- a*, section of sustaining wall.
- b*, section of sustaining wall of embankment, *d*.
- c*, section of reversed arch.
- d*, section of embankment from which counter-pressure comes.
- e*, section of embankment behind sustaining wall.

When the bed cannot be buttressed in front, as in quay walls, a grillage and platform supported on piles (Fig. 46) may be built to the rear from the back of the wall, for the purpose of supporting the embankment against the back of the wall, and preventing the effect which its pressure on the subsoil might have in thrusting forward the bed of the foundation.

In addition to these means, land ties of iron will give great additional security, when a fixed point in rear of the wall can be found to attach them firmly.

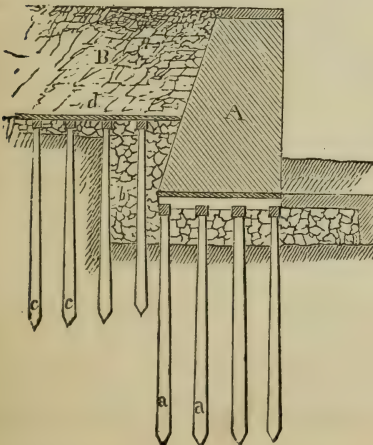


Fig. 46 represents the manner of relieving a sustaining wall from the lateral action caused by the pressure of an embankment on the subsoil by means of a platform built behind the wall.

- A*, section of the wall.
- B*, section of embankment.
- a*, piles supporting the grillage and platform of *A*.
- b*, loose stone, forming a firm bed under the platforms.
- c*, piles supporting the platform *d* behind the wall.

VI.

FOUNDATIONS OF STRUCTURES IN WATER.

444. In laying foundations in water, two difficulties have to be overcome, both of which require great resources and care on the part of the engineer. The first is found in the means to be used in preparing the bed of the foundation; and the second in securing the bed from the action of water, to insure the safety of the foundations. The last is generally the more difficult problem of the two; for a current of water will gradually wear away, not only every variety of loose soils, but also the more tender rocks, such as most varieties of sandstone, and the calcareous and argillaceous rocks, particularly when they are stratified, or are of a loose texture.

445. To prepare the bed of a foundation in stagnant water the only difficulty that presents itself is to exclude the water from the area on which the structure is to rest. If the depth of water is not over 4 feet, this is done by surrounding the area with an ordinary water-tight dam of clay, or of some other binding earth. For this purpose, a shallow trench is formed around the area, by removing the soft or loose stratum on the bottom; the foundation of the dam is commenced by filling this trench with the clay, and the dam is made by spreading successive layers of clay about one foot thick, and pressing each layer as it is spread to render it more compact. When the dam is completed, the water is pumped out from the enclosed area, and the bed for the foundation is prepared as on dry land.

446. When the depth of stagnant water is over 4 feet, and in running water of any depth, the ordinary dam must be replaced by the coffer-dam. This construction consists of two rows of plank, termed *sheeting piles*, driven into the soil vertically, forming thus a coffer-work, between which clay or binding earth, termed the *puddling*, is filled in, to form a water-tight dam to exclude the water from the area enclosed.

The arrangement, construction, and dimensions of coffer-dams depend on their specific object, the depth of water, and the nature of the subsoil on which the coffer-dam rests.

With regard to the first point, the width of the dam between the sheeting piles should be so regulated as to serve as a scaffolding for the machinery and materials required about the work. This is peculiarly requisite where the coffer-dam en-

closes an isolated position removed from the shore. The interior space enclosed by the dam should have the requisite capacity for receiving the bed of the foundations, and such materials and machinery as may be required within the dam.

The width or thickness of the coffer-dam, by which is understood the distance between the sheeting piles, should be sufficient not only to be impermeable to water, but to form, by the weight of the puddling, in combination with the resistance of the timber-work, a wall of sufficient strength to resist the horizontal pressure of the water on the exterior, when the interior space is pumped dry. The resistance offered by the weight of the puddling to the pressure of the water can be easily calculated; that offered by the timber-work will depend upon the manner in which the framing is arranged, and the means taken to *stay* or buttress the dam from the enclosed space.

The most simple and the usual construction of a coffer-dam

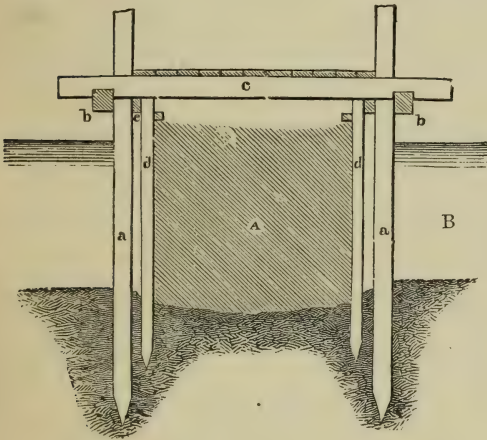


Fig. 47—represents a section of the ordinary coffer-dam.

- a, main piles.
- b, wale or string pieces.
- c, cross pieces.
- d, sheeting piles.
- c, guide string pieces for sheeting piles.
- A, puddling.
- B, interior space.

(Fig. 47) consists in driving a row of ordinary straight piles around the area to be enclosed, placing their centre lines about 4 feet asunder. A second row is driven parallel to the first, the respective piles being the same distance apart; the distance between the centre lines of the two rows being so regulated as to leave the requisite thickness between the sheeting piles for the dam. The piles of each row are connected by a horizontal beam of square timber, termed a *string* or *wale piece*, placed a foot or two above the highest water line, and

notched and bolted to each pile. The string pieces of the inner row of piles are placed on the side next to the area enclosed, and those of the outer row on the outside. Cross beams of square timber connect the string pieces of the two rows upon which they are notched, serving both to prevent the rows of piles from spreading from the pressure that may be thrown on them and as a joisting for the scaffolding. On the opposite sides of the rows interior string pieces are placed, about the same level with the exterior, for the purpose of serving both as guides and supports for the sheeting piles. The sheeting piles being well jointed are driven in juxtaposition, and against the interior string pieces. A third course of string or *ribbon* pieces of smaller scantling confine, by means of large spikes, the sheeting piles against the interior string pieces.

As has been stated, the thickness of the dam and the dimensions of the timber of which the coffer-work is made will depend upon the pressure due to the head of water, when the interior space is pumped dry. For extraordinary depths, the engineer would not act prudently were he to neglect to verify by calculation the equilibrium between the pressure and resistance; but for ordinary depths under 10 feet, a rule followed is to make the thickness of the dam 10 feet; and for depths over 10 feet to give an additional thickness of one foot for every additional depth of three feet. This rule will give every security against filtrations through the body of the dam, but it might not give sufficient strength unless the scantling of the coffer-work were suitably increased in dimensions.

In very deep tidal water, coffer-dams have been made in offsets, by using three rows of sheeting piles for the purpose of giving greater thickness to the dam below the low-water level. In such cases strong square piles closely jointed and tongued and grooved, should be used in place of the ordinary sheeting piles.

Besides providing against the pressure of the head of water, suitable dimensions must be given to the sheeting piles, in order that they may sustain the pressure arising from the puddling when the interior space is emptied of water. This pressure against the interior sheeting piles may be further increased by that of the exterior water upon the exterior sheeting piles, should the pressure of the latter be greater than the former. To provide more securely against the effect of these pressures, intermediate string pieces may be placed against the interior row of piles before the sheeting piles are driven; and the opposite sides of the dam on the interior may

be buttressed by cross pieces reaching across the top string pieces, and by horizontal beams placed at intermediate points between the top and bottom of the dam.

The main inconvenience met with in coffer-dams arises from the difficulty of preventing leakage under the dam. In all cases the piles must be driven into a firm stratum, and the sheeting piles should equally have a firm footing in a tenacious compact substratum. When an excavation is requisite on the interior, to uncover the subsoil on which the bed of the foundation is to be laid, the sheeting piles should be driven at least as deep as this point, and somewhat below it if the resistance offered to the driving does not prevent it.

The puddling should be formed of a mixture of tenacious clay and sand, as this mixture settles better than pure clay alone. Before placing the puddling, all the soft mud and loose soil between the sheeting piles should be carefully extracted; the puddling should be placed in and compressed in layers, care being taken to agitate the water as little as practicable.

With requisite care coffer-dams may be used for foundations in any depth of water, provided a water-tight bottoming can be found for the puddling. Sandy bottoms offer the greatest difficulty in this respect, and when the depth of water is over 5 feet, extraordinary precautions are requisite to prevent leakage under the puddling.

When the depth of water is over 10 feet, particularly where the bottom is composed of several feet of soft mud, or of loose soil, below which it will be necessary to excavate to obtain a firm stratum for the bed of the foundation, additional precautions will be requisite to give sufficient support to the interior sheeting piles against the pressure of the puddling, to provide against leakage under the puddling, and to strengthen the dam against the pressure of the exterior water, when the interior space is pumped dry and excavated. The best means for these ends, when the locality will admit of their application, is to form the exterior of the dam, as has already been described, by using piles and sheeting piles, giving to the latter additional points of support, by intermediate string pieces between the one at top and the bottom of the water; and to form a strong framing of timber for a support to the interior sheeting piles, giving to it the dimensions of the area to be enclosed. The framework (Fig. 48) may be composed of upright square beams, placed at suitable distances apart, depending on the strength required, upon which square string pieces are bolted at suitable distances from the top to the

bottom, the bottom string resting on the surface of the mud. The string pieces, serving as supports for the sheeting piles, must be on the sides of the uprights towards the puddling, and their faces in the same vertical plane. Between each

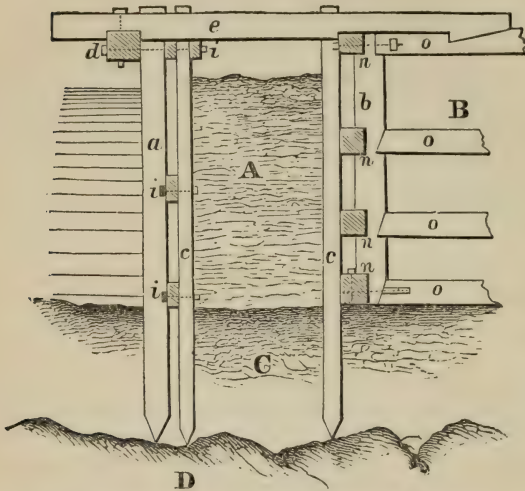


Fig. 48 Represents a section of the cofferdam used for the Potomac aqueduct.

- a, main exterior piles.
- b, strong square beams corresponding to a on which the wales n, n are notched and bolted.
- c, sheeting piles.
- d, top wale on main piles.
- e, crosspieces.
- i, guide and supporting string pieces for sheeting piles.
- oo, horizontal shores buttressing opposite sides of dam.
- A, puddling.
- B, interior space.
- C, mud, etc.
- D, rock bottom.

pair of opposite uprights horizontal shores may be placed at the points opposite the position of the string pieces, to increase the resistance of the dam to the pressure of the water; the top shores extending entirely across the dam, and being notched on the top string pieces. The interior shores must be so arranged that they can be readily taken out as the masonry on the interior is built up, replacing them by other shores resting against the masonry itself.

447. Caisson and Cribwork Cofferdams. In the construction of the foundations for the piers and abutments of the Victoria tubular iron railroad bridge over the river Saint Lawrence, at Montreal, the engineers had to contend against unusual difficulties; in a rocky bottom covered with boulders, which prevented the use of piles; and in a swift current, bringing down in the spring of the year enormous fields of ice, the effects of which none of the ordinary methods of caisson or cofferdams could have withstood.

These difficulties were successfully met, in some cases by the use of a large water-tight caisson, shown in plan (Fig. 49), and in cross-section (Fig. 51), of such a form and dimensions as to leave a sufficient interior area, between its interior sides,

for a coffer-dam, and for the ground to be occupied for the construction of the foundations of the pier. In others (Fig. 51), where, from the velocity of the current, the caissons, from their great bulk, proved unmanageable, by enclosing the area to be occupied by crib-work, sunk upon the bottom and heavily laden with stone; and exterior to this forming a second similar enclosure; and then, by means of sheeting piles, supported against the opposite sides of these two enclosures, forming a coffer-dam between them.

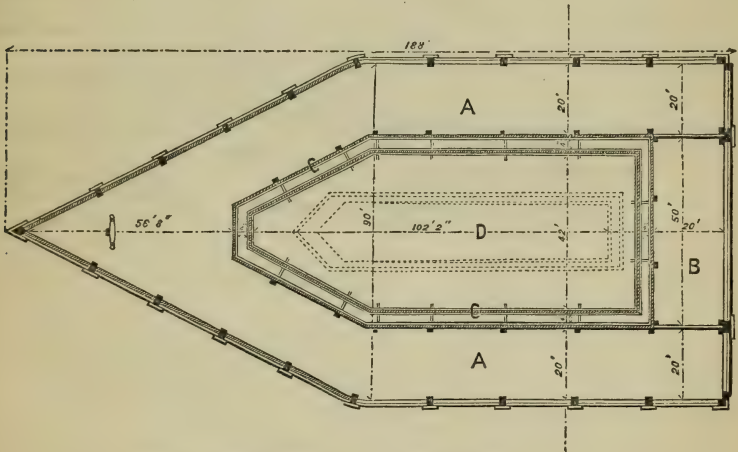


Fig. 49. Plan of caisson. B, Detached end.
A, A, sides of caisson. C, Puddling.
D, Plan of pier of bridge.

The caisson (Fig. 49) consisted of two parts, the two sides and up-stream wedge-shaped head, and a rectangular-shaped portion B, which fitted in between the two sides, forming the down-stream end, and which could be detached and floated off when it became necessary to remove the entire caisson.

The caisson (Fig. 50) was flat-bottomed, with vertical sides; and it was provided with a strong flat deck, to receive the workshops, machinery, and materials for pumping, dredging, and the construction of the masonry.

When placed in position, it was moored to a loaded, sunken crib-work up-stream; and, besides the exterior guide-piles, long two-inch iron bolts were inserted into holes drilled into the solid rock, through vertical holes bored through the piles. In this way, through the bearing of the piles on the bottom, the foothold given by the bolts and the mooring-tackle, the

caisson, when sunk, was solidly secured against accidents from rafts, or other floating bodies.

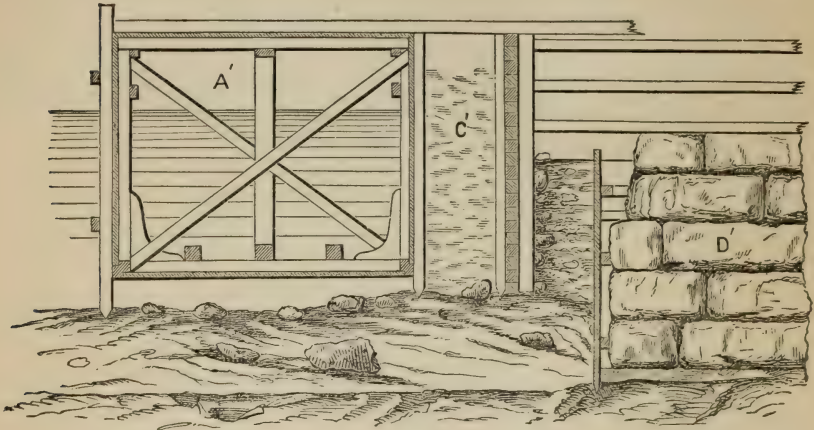


Fig. 50. Cross-section of Fig. 49.
A', Cross-section of caisson.

C', Cross-section of puddling and sheeting.
D', Foundation courses of pier.

The interior sides of the coffer-dam were strongly buttressed by horizontal beams, to withstand the pressure of the water. These beams were removed, and their places supplied by shorter buttresses placed between the sides of the coffer-dam and pier as the masonry was carried up.

The cribwork dams were constructed of a number of cribs, each about forty feet in length, which were placed end to end to form the sides of the enclosures, and strongly connected with each other. Some of these were constructed on shore, and towed to their positions. Some were constructed in the water behind mooring cribs, and others upon the ice during the winter, and sunk in position.

A flooring (Fig. 51) was made, about midway between the top and bottom of the cribs, to receive the blocks of stone with which the cribs were loaded, to secure them from the effects of the pressure of the ice in its spring movement, and the collision of floating bodies.

The caissons were not of adequate strength to resist the crush of the ice, and had to be pumped out and removed to a secure position before the closing of the river. The cribs were planked over at top, and remained in place as long as required for the work.

448. When the bed of a river presents a rocky surface, or

rock covered with but a few feet of mud, or loose soil, cases may occur in which it will be more economical and equally safe to lay a bed of béton without exhausting the water from the area to be built on; enclosing the area, before throwing in the béton, by a simple coffer-work formed of a strong

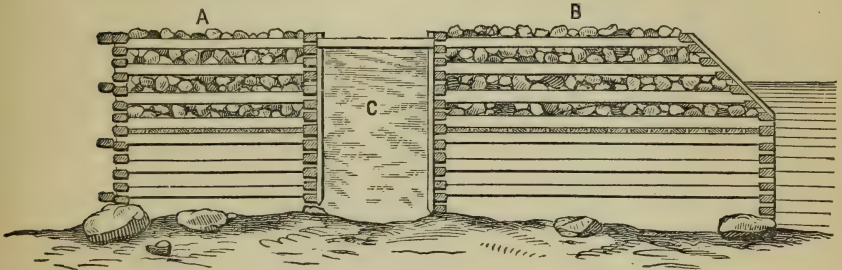


Fig. 51. Cross-section of cribwork dams.
A, Interior crib.

B, Exterior crib.
C, Puddling and sheeting piles.

framework of uprights and horizontal beams and sheeting piles. The framework (Fig. 52) in this case is composed of uprights connected by string pieces in pairs; each pair is notched and bolted to the uprights, a sufficient interval being left between them for the insertion of the sheeting piles. To secure the framework to the rock, it may be requisite to drill holes in the rock to receive the foot of each upright. The holes may be drilled by means of a long iron bar, termed a *juniper*, which is used for this purpose, or else the ordinary diving-bell may be employed. This machine is very serviceable in all similar constructions where an examination of work under water is requisite, or in cases where it is necessary to lay masonry under water. The framework is put together on land, floated to its position, and settled upon the rock; the sheeting piles are then driven into close contact with the surface of the rock.

449. The convenience and economy resulting from the use of béton for the beds of structures raised in water have led General Treussart to propose a plan for laying beds of this material, and then to take advantage of their strength and impermeability to construct a coffer-dam upon them, in order to carry on the superstructure with more care. To effect this, the space to be occupied by the bed (Fig. 53) is first enclosed by square piles, driven in juxtaposition and secured at top by a string piece. The mud and loose soil are then scooped from the enclosed area to the firm soil on which the

bed of béton is to be laid. The bed of béton is next laid with the usual precautions, and while it is still soft a second row of square piles is driven into it, also in juxtaposition, and

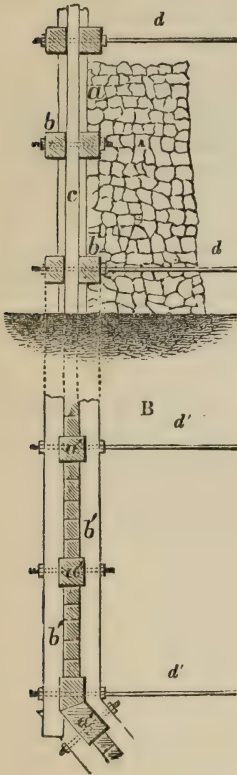


Fig. 52 represents a coffer-work for confining béton.
A, Section of coffer-work and béton.

B, Plan of coffer-work.

a, a', square uprights connected by horizontal beams, *b, b'*, bolted to them in pairs.

c, c', sheeting piles inserted between the beams *b, b'* and the uprights *a, a'*.

a, a', iron rods connecting opposite sides of coffer-work.

at a suitable distance from the first for the thickness of the dam; these are also secured at top by a string piece. Cross pieces are notched upon the string pieces, to secure the rows of piles and form a scaffolding. An ordinary puddling is placed in between the rows of piles, and the interior space is pumped dry.

Should the soil under the bed of béton be permeable, the pressure of the water on the base of the bed may be sufficient to raise the bed and the dam upon it, when the water is taken from the interior space. A proper calculation will show whether this danger is to be apprehended, and should it be,

a provisional weight must be placed on the dam, or the bed of béton, before exhausting the interior.

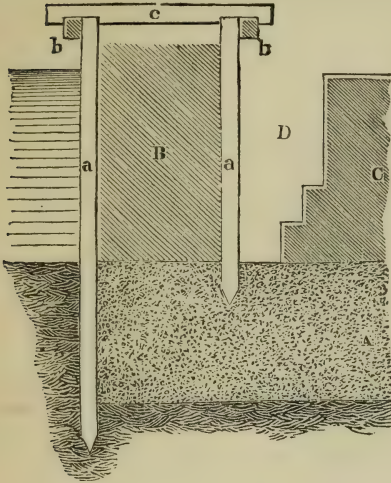


Fig. 53 represents a section of General Treussart's dam.

- A, bed of béton.
- B, puddling of dam.
- C, masonry of structure.
- a, square piles.
- b, wale pieces.
- c, cross pieces.

450. When the depth of water is great, or when, from the permeability of the soil at the bottom, it is difficult to prevent leakage, a coffer-dam may be a less economical method of laying foundations than the caisson. The *caisson* (fig. 54.) is a strong water-tight vessel having a bottom of solid heavy timber, and vertical sides so arranged that they can be readily detached from the bottom. The following is the usual arrangement of the caisson, it, like the coffer-dam, being subject to changes to suit it to the locality. The bottom of the caisson, serving as a platform for the foundation course of the masonry, is made level and of heavy timber laid in juxtaposition, the ends of the beams being confined by tenons and screw-bolts to longitudinal capping pieces of larger dimensions. The sides of the box are usually vertical. The sides are formed of upright pieces of scantling covered with thick plank, the seams being carefully calked to make the caisson water-tight. The lower ends of the uprights are inserted into shallow mortises made in the capping. The arrangement for detaching the sides is effected in the following manner: Strong hooks of wrought iron are fixed to the bottom of the caisson at the sides of the capping piece, corresponding to the points where the uprights of the sides are in-

serted into this piece. Pieces of strong scantling are laid across the top of the caisson, resting on the opposite uprights, upon which they are notched. These cross pieces project beyond the sides, and the projecting parts are perforated by an auger-hole, large enough to receive a bolt of two inches in

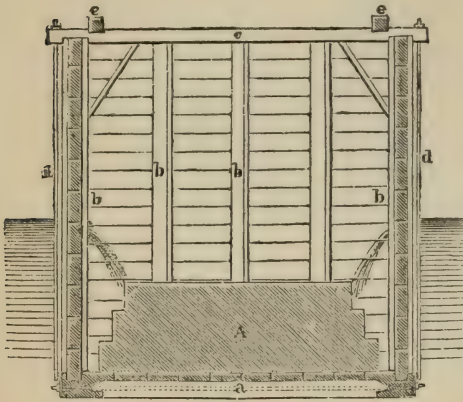


Fig. 54 represents a cross section and interior end view of a caisson. The boards in this figure are represented as let into grooves in the vertical pieces, instead of being nailed to them on the exterior.

- a, bottom beams let into grooves in the capping.
- b, square uprights to sustain the boards.
- c, cross pieces resting on b.
- d, iron rods fitted to hooks at bottom and nuts at top.
- e, longitudinal beams to stay the cross pieces c.
- A, section of the masonry.

diameter. The object of these cross pieces is twofold; the first is to buttress the sides of the caisson at top against the exterior pressure of the water; and the second is to serve as a point of support for a long bolt, or rod of iron, with an eye at the lower end, into which the hook on the capping piece is inserted, and a screw at top, to which a nut or female screw is fitted, and which, resting on the cross pieces as a point of support, draws the bolt tight, and, in that way, attaches the sides and bottom of the caisson firmly together.

A bed is prepared to receive the bottom of the caisson, by levelling the soil on which the structure is to rest, if it be of a suitable character to receive directly the foundation; or by driving large piles through the upper compressible strata of the soil to the firm stratum beneath. The heads of the piles are sawed off on a level to receive the bottom of the caisson.

To settle the caisson on its bed, it is floated to and moored over it; and the masonry of the structure is commenced and carried up, until the weight grounds the caisson. The caisson should be so contrived, that it can be grounded, and afterwards raised, in case that the bed is found not to be accurately levelled. To effect this, a small sliding gate should be placed in the side of the caisson, for the purpose of filling it with

water at pleasure. By means of this gate, the caisson can be filled and grounded, and by closing the gate and pumping out the water, it can be set afloat.

After the caisson is settled on its bed, and the masonry of the structure is raised above the surface of the water, the sides are detached by first unscrewing the nuts and detaching the rods and then taking off the top cross pieces. By first filling the caisson with water, this operation of detaching the sides can be more easily performed.

451. To adjust the piles before they are driven, and to prevent them from spreading outward by the operation of driving, a strong grating of heavy timber, formed by notching cross and longitudinal pieces on each other, and fastening them firmly together, may be resorted to. This grating is arranged in a similar manner to a grillage; only the square compartments between the cross and string pieces are larger, so that they may enclose an area for 4 or 9 piles; and instead of a single row of cross pieces, the grating is made with a double row, one at top, the other at the bottom, embracing the string pieces on which they are notched.

The grating may be fixed in its position at any depth under water, by a few provisional piles, to which it can be attached.

452. Where the area occupied by a structure is very considerable, and the depth of water great, the methods which have thus far been explained cannot be used. In such cases, a firm bed is made for the structure, by forming an artificial island of loose heavy blocks of stone, which are spread over the area, and receive a batter of from one perpendicular to one base, to one perpendicular and six base, according to the exposure of the bed to the effects of waves. This bed is raised several feet above the surface of the water, according to the nature of the structure, and the foundation is commenced upon it.

453. It is important to observe, that, where such heavy masses are laid upon an untried soil, the structure should not be commenced before the bed appears entirely to have settled; nor even then if there be any danger of further settling taking place from the additional weight of the structure. Should any doubts arise on this point, the bed should be loaded with a provisional weight, somewhat greater than that of the contemplated structure, and this weight may be gradually removed, if composed of other materials than those required for the structure, as the work progresses.

454. To give perfect security to foundations in running water, the soil around the bed must be protected to some ex-

tent from the action of the current. The most ordinary method of effecting this is by throwing in loose masses of broken stone of sufficient size to resist the force of the current. This method will give all required security, where the soil is not of a shifting character, like sand and gravel. To secure a soil of this last nature, it will in some cases be necessary to scoop out the bottom around the bed to a depth of from 3 to 6 feet, and to fill this excavated part with béton, the surface of which may be protected from the wear arising from the action of the pebbles carried over it by the current, by covering it with broad flat flagging stones.

455. When the bottom is composed of soft mud to any great depth, it may be protected by enclosing the area with sheeting piles, and then filling in the enclosed space with fragments of loose stone. If the mud is very soft, it would be advisable, in the first place, to cover the area with a grillage, or with a layer of brushwood laid compactly, to serve as a bed for the loose stone, and thus form a more stable and solid mass.

456. **Pneumatic Processes.**—By this term we understand those methods of obtaining foundations in water, in which external or internal atmospheric pressure is the active agent.

These processes are divided into two classes, viz.: the *plenum pneumatic* and the *vacuum pneumatic*, the former term being applied to the case where the pressure of condensed air is employed to drive the water out, and the latter, where the pressure of the atmosphere is employed to drive the water into a vacuum.

457. **Pneumatic Piles.**—This appellation has been given to cylinders of cast-iron, used in the place of ordinary piles to reach a firm subsoil below the bed of a river, suitable for the character of the superstructure to rest upon it, which, being made air-tight on the sides and top, but left open at the bottom, are sunk to the required depth, by rapidly withdrawing the air within them, by methods to be described, and thus causing the water to rush in through the open bottom, removing in its flow the subsoil in contact with the lower end of the cylinder, and allowing it to sink by its own weight, thus belonging to the vacuum pneumatic class.

The cylinders are cast and put together very much in the same manner as ordinary water-pipes; being composed of lengths of from six to ten feet, each of which has an interior flange at each end, with holes for screw-bolts, by means of which and a disk of india-rubber, inserted between the connecting flanges, the joints are made air and water tight.

In the first essays at this mode of foundation, the cylinders were sunk by simply exhausting the internal air, in the ordinary way, above the water-level. The results, however, were not satisfactory, as the pile sunk very slowly.

The next step (Fig. 55) was to connect an air-tight cylindrical vessel, D, by means of a tube A, with a stop-cock, with the interior of the pile A, and also with the air-pump, by another tube leading to the pump from the other end. In order to sink the pile, the communication between it and the exhaust chamber D was first closed, and that between this chamber and air-pump opened. The air was then drawn from D until a sufficient vacuum was produced, when the

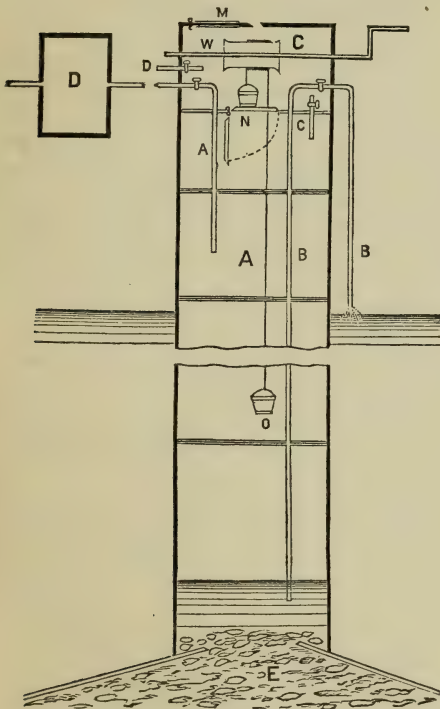


Fig. 55.—Longitudinal section of a pneumatic pile A, air-lock C, and exhaust vessel D.
 A, exhaust tube between A and D.
 B, water discharge-tube.
 C, equilibrium tube between the lock and chamber of the pile.
 D, equilibrium tube between lock and exterior air.
 M, upper man-hole and valves.
 N, lower man-hole and valves.
 W, windlass and gearing,
 E, concrete underpinning as practised at Harlem bridge.

communication with the pump was closed, and that with the pile opened, allowing the air to flow from it into the chamber with considerable velocity. This sudden disturbance of the equilibrium between the external and internal pressures on the

pile caused it to descend instantaneously and rapidly, as if struck on the top by a heavy blow, the descent continuing frequently many feet until an equilibrium among the forces was restored.

When the resistance to the further descent of the pile was found to be too great, either from some obstruction met with at the bottom, or from the tenacity of the soil itself, the ingenious expedient was hit upon to force the water from within the pile, by pumping air into it, and thus enable workmen to descend to the bottom and remove the soil or other obstruction to the descent. The plan devised for this purpose was to fit another air-tight iron cylindrical vessel C to the top of the pile, of sufficient diameter and height to hold several workmen, and a windlass W, arranged with an endless rope and buckets for raising the excavated soil into the chamber C.

The chamber, which has received the name of an *air-lock* from its functions, was provided with an upper man-hole M at top for entering the lock, and one N in the bottom for entering the pile. Each man-hole had two air-tight valves, one opening outwards, the other inwards. Two tubes, C and D, with stop-cocks, furnished an air-passage between the air of the pile and that of the lock, and between the latter and the external air. A syphon-shaped water-discharge tube B, with a stop-cock, leads from below the level of the inner water surface through the bottom and side of the lock.

The operation of sinking the pile by first exhausting the air from the exhaust chamber D, was the same in this case as in the preceding; the upper valves of either man-hole being closed, and all communication between the external air and the interior of the pile being cut off by means of the stop-cocks.

When it became necessary to descend to the bottom of the pile, to remove the soil or any obstruction, the lower valve of the lower man-hole, with the tube C, were closed; the discharge tube, B, left open; and the air forced into the pile, by the pumps, through the tube A; the increased pressure upon the water surface caused the water to rise in the tube B, and flow out at the other end.

When all the water was discharged in this way, the lower valve of the upper man-hole, and tubes A, B, and D were closed; the tube C was then opened, through which the condensed air in the pile flowed into the lock, until the density of the air in it and in the pile became the same; the lower valve of the lower man-hole was then opened, to allow the

workmen to descend, and the excavated soil to be raised into the lock-chamber.

To take the excavated material out of the lock, the lower man-hole under valve and the tube C are closed, and the tube D opened; the condensed air of the lock flows out, and the upper man-hole lower valve is opened.

In some of the more recent cases of the application of pneumatic piles, the exhaust-chamber and the discharge water-pipe have been suppressed; condensed air being alone used, both to force the internal water out through the open bottom of the pile, to allow the workmen to excavate within, and also to produce a scour below the lower end, from the rush of the water back into the pile, by allowing the condensed air to escape rapidly from it. For this purpose a tube leads from the air-pumps through the side and bottom of the air-lock, into the pile, to supply the compressed air. Another pipe with a stop-cock leads through the side and bottom of the lock, from the external air to the interior of the pile, through which the condensed air in the pile can be discharged. The upper and lower man-holes have each an under valve. Two equilibrium-tubes with stop-cocks, one forming a connection between the interior of the pile and the air-lock, the other leading through the side of the lock to the external air, furnish the means of bringing the air of the lock to the same density as that within the pile, or that of the atmosphere.

To force out the water, the lower man-hole, the condensed air discharge pipe, and the condensed air equilibrium-tube are closed, and the air then forced into the pile by the pumps.

To excavate the internal soil, the workmen enter the lock, close the upper man-hole and the upper equilibrium-tube, and open the lower equilibrium-tube. This establishes an equilibrium between the air of the lock and that of the pile, and the workmen can then descend into the pile and excavate the soil.

To remove the excavated soil which has been raised into the lock, the lower man-hole and lower equilibrium-tube are closed, and the upper equilibrium-tube opened, which establishes an equilibrium between the air of the lock and that of the atmosphere. The upper man-hole then being opened, the material in the lock can be carried out.

To produce a scour under the pile to allow it to sink, the workmen leave the pile and lock; the condensed air discharge-pipe is then opened, and by the rush of the water

into the pile all obstruction to the movement of the pile is removed from its lower end.

458. Double Air-Locks. In some of the more recent applications of condensed air in Europe, air-locks in pairs have been used to save time.

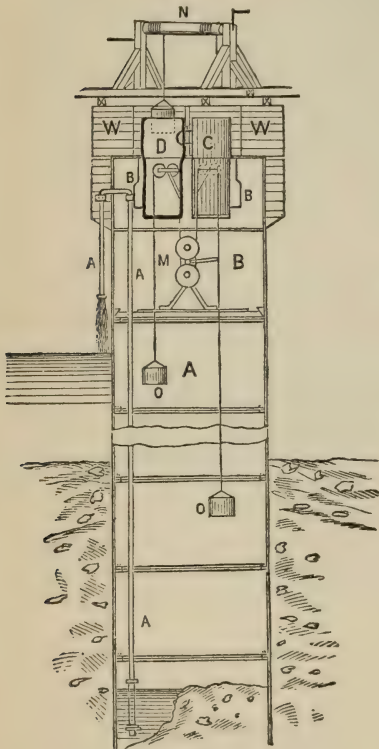


Fig. 56.—Longitudinal section of pile A, bell or working-chamber B, and air-locks C, D, used at the bridge at Szegedin, over the river Theiss, Hungary.

- A, water discharge-pipe.
- B, equilibrium tubes of air-lock.
- C, elevation of air-lock.
- D, longitudinal section of air-lock.
- M, hoisting-gear in the bell.
- N, hoisting-gear for air-lock.
- W, counterpoise to compressed air.

The arrangements in this case (fig. 56) consist of a working chamber, B, termed the *bell*, which is a large air-tight iron cylindrical vessel fastened to the head of the pile, in which there is sufficient room for a hoisting apparatus, M, and several workmen, to raise the excavated soil to the level of the air-locks; of two small air-locks, D and C, which are inserted into the bell about two-thirds of their length; of a syphon-shaped water discharge-pipe A; and of a windlass N to raise the excavated soil out of the locks.

Each lock has a man-hole, with an undervalue on top, for

entering the lock, and a vertical door on the side for entering the bell. Each is provided with two sets of equilibrium valves, so arranged that they can be opened by a person from within the bell or the lock, to establish an equilibrium between the air in them; or from the outside of the lock, or the inside, to establish an equilibrium between the external air and that of the lock.

The air in the pile is condensed by air-pumps in the usual way.

The hoisting-engine in the bell has its gearing so arranged that the filled buckets can be delivered alternately into the locks, and from there be taken by the gearing of the windlass above. In the example represented by Fig. 56, a weight, W, formed of cast-iron bars, resting on brackets cast on the outside of the bell, forms a counter-pressure to the interior condensed air.

The pile is sunk by opening a condensed air-pipe leading to the external air, the lower portions of water discharge-pipe having been removed, and, with the tools used in excavating, placed within the bell.

The descent of the pile at each discharge of the condensed air depends upon the nature of the strata met with. In very compact clay the descent will, in some instances, be only a few inches in several discharges; while in sandy or gravelly strata it will descend as much, at times, as twelve or more feet. This is owing to the difference between the effect of the scour, and the resistance offered by the friction on the exterior surface of the pile. The resistances in sand and gravel being much less than in stiff clay. It has been found, in some cases, that two or three feet of a compact clay soil left within the piles at the bottom would prevent the scour and the further descent of the pile when the condensed air was discharged.

The piles are placed in position by a suitable hoisting-gearing raised upon a strong scaffolding; and in their descent are kept in a vertical position by guides placed in connection with the scaffolding. Great precautions have to be taken in managing the descent of the pile, when it is approaching the depth to which it is wished to sink it, so as to keep the top surface of each on the same level.

In the first applications of pneumatic piles, cast-iron cylinders of small diameters were used; as many being sunk as the resistance of the substratum upon which they rested required to support the base of the superstructure. Subsequently the diameters of the cylinders were enlarged, to

enable the soil to be excavated from the interior, and be replaced with hydraulic concrete. In some instances the concrete simply rested upon the bottom of the excavation. In others, wooden piles were driven within the cylinder some distance below its lower end, and the concrete thrown in to rest upon the heads of the piles.

Harlem Bridge.—In the Harlem Bridge the piles were six feet in diameter, and cast in lengths of ten feet. The air-lock was of the same diameter as the piles, and six feet high; the valves or man-holes twenty inches in diameter. The most noticeable feature in this part of the structure, is the expedient of using an underpinning of plank and concrete, to obtain a wider spread of the foundation bed, and a greater bearing surface for the superstructure to rest on. For this purpose, plank five feet long, three inches wide, and one inch and a quarter thick (Fig. 55) were forced under the bottom of the pile, in sections of three feet wide on opposite sides, and in an inclined direction, so as to gain an additional spread of foundation base of two feet around and beyond the pile. These formed a temporary roofing, from beneath which the soil was rapidly removed, and the excavated space filled in with concrete. Finding great inconvenience in this process, from the rapidity with which the water and sand came in on the sides, an additional condensation was given to the compressed air of six to ten feet extra water pressure; this was found to counteract the external pressure, so as to allow the excavations to be carried on with facility.

The refuse gas-pipes which were used to convey the compressed air down between the bottom of the concrete and the underlying soil, as well as giving it a passage between the outside of the pipes and the body of the concrete, were distributed through the concrete about a foot apart.

The bottom of the foundation in this example was thirty feet below the surface of the river-bed, and fifty below tide.

An opinion has obtained, from the condition in which the hydraulic concrete was found in a pile accidentally fractured, in which it had lain for some time, that this material did not harden when subjected to the great pressure of the water from the bottom. A remedy, it is stated, has been found for this by using a portion of fragments of a porous brick in a dry state instead of stone, in the composition of the concrete, as was done in the case of the piers of the bridge at Szegedin, in Hungary; and by inserting in the body of the concrete half-inch gas-pipes, through which the compressed

air was diffused throughout the mass, as practised at the Harlem Bridge by Mr. McAlpine.

Bridge over the Theiss.—The soil below the bed of the river Theiss, at Szegedin, is alluvial, and found in alternate strata of compact clay and sand to an indefinite depth. The current throughout its course is sluggish, having a surface velocity at Szegedin, during the highest stage of the waters, of from three to three and a half feet. The rise and fall of the water are both very gradual; the highest stage being about twenty-six feet, and the mean level about sixteen feet. The arched ribs and other superstructure of the bridge were of wrought-iron plates. Each pier was formed of two piles, or columns, filled with *béton*, as above described; and each supporting one track of the railroad. They were cast in lengths of six feet, and ten feet in diameter, and one inch and one-tenth in thickness. The piles were sunk to the depth of about thirty feet below the surface of the bed; and about forty feet below the ordinary low-water level. Their height corresponded to the highest water level, or nearly thirty-three feet above the presumed scour of the bed.

The interior excavation of the soil was carried down to the first joint, or six feet from the bottom of the column. To compress the soil below the column to sustain better the superincumbent weight, twelve piles of pine were driven within the column to a depth of twenty feet below the bottom.

The air-locks were each about six feet six inches in height, and two feet nine inches in diameter.

To provide against the scour of the current, the entire pier was enclosed by a row of square sheeting-piles, driven to the level of the bottom of the columns, and about two feet from them. The space between these piles and columns, to the depth of ten feet below the bed level, was filled with hydraulic concrete; and the piles were surrounded by loose stone with a spread of about ten feet from the piles.

As large quantities of hydraulic concrete are required for filling the piles, the method pursued in Germany, and as practised at the bridge at Szegedin, for mixing the mortar and fragments of brick or stone, commends itself for its economy, and the thoroughness with which the materials are incorporated. A wooden cylinder about twelve feet long, and four feet diameter, made and hooped like a barrel, and lined with sheet-iron, placed in an inclined position of $\frac{1}{13}$ to the horizon, was made to revolve by a band set in motion by a steam-engine, from fifteen to twenty revolutions in a minute. The cylinder was fed by a hopper at the upper end, into which

the materials were thrown, and they were discharged thoroughly mixed and ready for use into wheelbarrows at the lower end. It is stated that this simple machine delivered from 280 to 350 cubic feet in ten hours.

The concrete is usually thrown down into the pile from the bell or lock. At the bridge at Szegedin the double locks were, alternately, nearly filled with the concrete, and it was raked out from them and thrown into the pile; care being taken to work it in well by hand, around the flanges and joints.

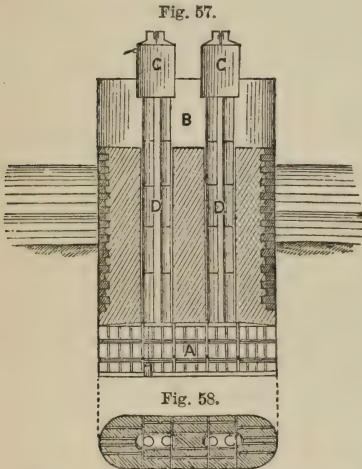


Fig. 57.—Longitudinal section of the caisson and masonry of a pier of a railroad bridge over the Scarff, at L'Orient, France.

Fig. 58.—Plan.

- A, working-chamber for excavating soil.
 B, interior elevation of caisson.
 C, C, elevation of the bells containing the double air-locks.
 D, D, cylinders for communication between bells and working-chamber.

Bridge over the Savannah River on the line of the Charleston and Savannah Rail Road. The air-locks on these piles were similar to the Harlem plan. Light was admitted into the air-lock by means of large bulls-eye glasses, and thence into the body of the pile in the same way, but this mode was found to be worthless, on account of the mud in the bottom of the air-lock which covered the glass. The engineer employed a secondary small air lock so that the material which was brought into the main one could be discharged at any time, and thus the work go on with less interruption, and the bulls-eyes became more serviceable. With the secondary air-lock the work progressed more rapidly; the ratio for a given amount of work being

$$\frac{\text{Time by old air-lock}}{\text{Time by new air-lock}} = \frac{14}{5}$$

By a fortunate discovery the engineer discovered that the pressure of the air in the pile was sufficient to force sand from

the bottom of the pile through a vertical pipe to a height above the surface of the water outside the works. A sort of telescopic tube was attached to the lower end of a pipe so that it could be easily moved downward as the excavation progressed. This greatly facilitated the progress of the work, for it was found that to do a given amount of work the ratio was

$$\frac{\text{Time by old air-lock} \dots 14}{\text{Time by blowing out sand} = \frac{1}{2}} = 28$$

This mode of excavation has been adopted to some extent in the caissons of the East River Bridge. This process also secures thorough ventilation. The same plan has also been used in the Omaha Bridge and Leavenworth Bridge with equally good results.

It is sometimes very difficult to keep the tubes vertical. When they begin to incline efforts should be made immediately to bring them to an erect position. In some cases wedges or blocks placed under the lower side and suddenly relieving the pressure will correct the evil. An ingenious mode was adopted by the engineer of the Omaha Bridge. He bored several holes through the tubes on the upper side, through which the compressed air escaped and thus disturbed the soil and relieved the pressure on that side so that it would sink faster. Strong levers have been used to pull on the top whilst the tube was sinking, but not with very marked results. In at least one very obstinate case, in which the holes on the upper side, combined with the action of a strong lever, did not alone effect the desired result, a ram was used in combination with the other devices and the erect position was quickly secured. The jar produced by the ram whilst the tube was sinking seemed to give great effect to the other devices.

Gen. W. S. Smith, who had charge of the construction of the foundations of the Omaha and Leavenworth Bridges, is of opinion that a pneumatic caisson, surmounted by masonry, is cheaper and better than pneumatic pile piers, but it is evident that circumstances may often determine which is preferable in any particular case.

459. Pneumatic Caissons. The application of compressed air for laying foundations has been further extended in some of the railroad bridges recently constructed in Europe; by using wrought-iron caissons of sufficient dimensions to serve as an envelope, or jacket, for the masonry of an entire pier; and gradually sinking the whole to the requisite depth, by excavating the soil within the pier to the desired level.

The caissons (Figs. 57, 58) for this purpose were divided into two compartments.

The lower A (Fig. 57), which served as a chamber for the workmen, for excavating the soil, was strongly roofed at top, with iron bars and iron sheeting, to bear the weight of the masonry that rested upon it; and was securely buttressed on the sides to resist the inward pressure of the soil on the outside. The upper chamber, B, served as an ordinary caisson, fitting closely to the masonry on the sides, and rising sufficiently above it to exclude the water during the construction of the masonry: the body of which, composed of *béton* with a facing of stone, was gradually raised as the caisson was sunk through the earth overlying a bed of rock upon which the pier was finally to rest.

The working chamber A was connected with two bells C, C, by two vertical iron cylinders D, D (Fig. 57), for each bell; these cylinders serving as a communication between the working-chamber and bells, for the passage of the workmen from one to the other, for raising the excavated soil, and as a passage for the compressed air forced in by the air-pumps.

Each bell contained two air-locks for communicating between it and the exterior; and a hoisting-gearing for the excavated soil; the filled buckets ascending through one cylinder, and the empty ones descending through the other.

The lower chamber, the bottom of which was open, was kept filled with compressed air of sufficient density to exclude the water, and enable the workmen to excavate the soil.

The caisson was gradually sunk, by the weight of the superincumbent mass, as the soil below was removed.

So soon as the rock-bed was reached, the surface was thoroughly cleaned off, and levelled under the edges of the bottom of the caisson, and the chamber A was gradually filled in with masonry closely up to its roof. Finally the cylinders D were removed, and the wells occupied by them in the body of the pier, filled with *béton*.

As a matter of interest, on the subject of laying foundations by means of pneumatic piles and caissons, a few additional facts in connection with the examples above cited will not be out of place here.

Bridge over the Scorff. In the example of the bridge at L'Orient over the Scorff, the river-bed is a stratum of mud, forty-six feet in depth, resting upon a surface of hard schistose rock more or less inclined and uneven. The level of mean tide is about sixty feet above the rock surface; that of the highest tide seventy feet.

The caissons used in this example were designed for the piers of a stone bridge, and were about forty feet long and twelve feet broad. The bells, or upper working chambers, were ten feet high and eight feet in diameter; the lower working-chamber ten feet high; and the cylinders, for communication between them, two feet and a half in diameter.

The caissons were built of sheet-iron, in zones decreasing in thickness from the top to the bottom; but not having been buttressed within against the pressure of the water, as the lower working-chamber was, they yielded and got out of shape.

In a subsequent structure of nearly the same dimensions, for a railroad bridge at Nantes, the same failure took place, and precautions were then taken against it by the insertion of cross-stays, which were removed as the masonry was carried up. In the caissons used in this case, the bells and air-locks were made larger. Each air-lock had three separate compartments; one for the passage of the workmen which could contain four men; one for the barrows by which the excavated soil was removed, and one for the concrete to fill up the lower working chamber, when the excavation was completed.

St. Louis Bridge. The caissons for the two piers of this bridge differ in no material respect, so that a description of one will equally apply to the other. The air-chambers are nine feet high, the sides being formed of $\frac{3}{4}$ -inch plate iron in the larger, and $\frac{5}{8}$ -inch in the smaller. The air-chamber is simply a huge diving-bell of the full size of the pier. The iron plates K, K (Fig. 59), forming its roof, are of $\frac{1}{2}$ -inch thickness. Transversely over this and riveted firmly to it are thirteen iron girders L, at intervals of five and a half feet. Beneath the roof two massive timber girders C, C (Figs. 59 and 60), in an opposite direction to the iron ones, divide the air-chamber into three nearly equal parts. Communication between the three divisions is had through openings made for this purpose in the girders. These timber girders are intended to rest on the sand and support the roof from below. The sides of the air-chambers are strongly braced with plate iron brackets O O, stiffened with angle iron. Between the brackets is placed all around the chamber a course of strong timbers, the bottom of which is level with that of the girders, intended to rest on the sand and assist in supporting the weight. The support given by the timbers, together with the buoyant power of the compressed air in the chamber and the friction of the sand on the sides, is the only means relied on to sustain the pier in its gradual descent to the rock.

Fig. 59.

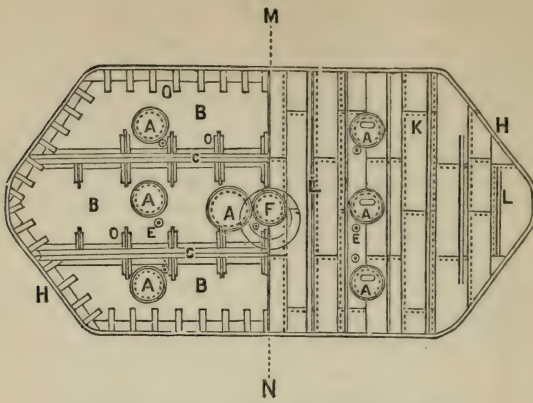


Fig. 60.

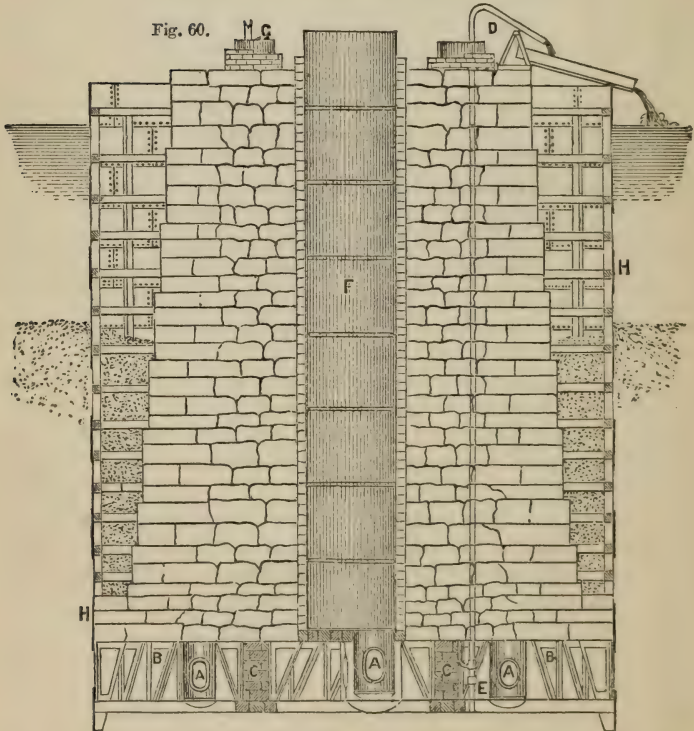


Fig. 59—Represents the plan of the caisson of the East pier of the Illinois and St. Louis Bridge. Fig. 60 represents transverse section of the same. A, air-locks. B, air-chamber. C, timber girders. D, discharge of sand. E, sand-pumps. F, main entrance shaft. G, side shafts. H, iron sides. I, bracing for H. K, iron deck or roof. L, iron girders. O, strengthening girders.

The air-locks A A, heretofore as a rule placed above the surface of the water, are located within the roof of the air-chamber, and access is had to them through brick wells F, G, thus avoiding the inconvenience and delay of adding new joints under the locks.

The sand-pumps E are placed on the roof of the chamber, their suction pipes extending through the chamber to the sand. The action of these pumps is very simple. A stream of water is forced down the pipe B, (Fig. 61), and discharged near the sand into the pipe A, through the annular jet C. The jet creates a vacuum below it, by which the sand is drawn into the second pipe, the lower end of which is in the sand, and the force of the jet carries it up to the mouth of the pump so soon as it passes C.

The abutments at the east end of the bridge (Figs. 61 a and 61 b) differed in some of the details of their construction from the piers.

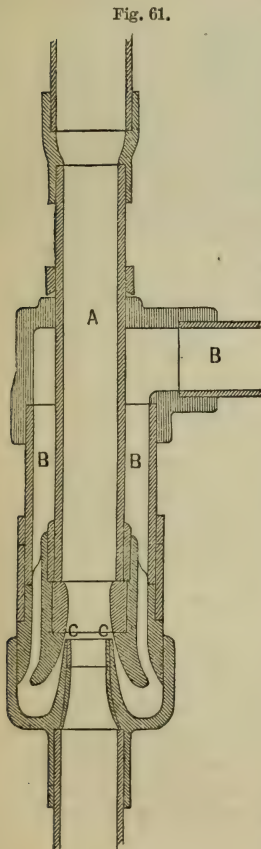


Fig. 61, represents a vertical section of a sand-pump.
 A, pump barrel.
 B, injection pipe.
 C, annular jet.


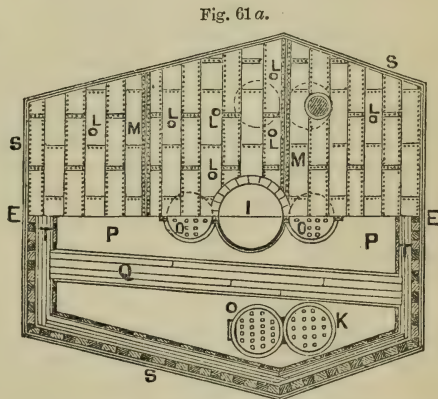


Fig. 61 a, is a part plan and part section of the east abutment of the St. Louis Bridge. Fig. 61 b, is a vertical section of the same.

- I, is the main shaft.
- KK, the side shafts.
- MM, iron girders.
- OO, the air-locks.
- PP, the air-chamber.
- QQ, the timber girders.
- RR, the timber deck.
- SS, the iron sheeting.
- TT, the timber sides of the caisson.

Fig. 61 b.

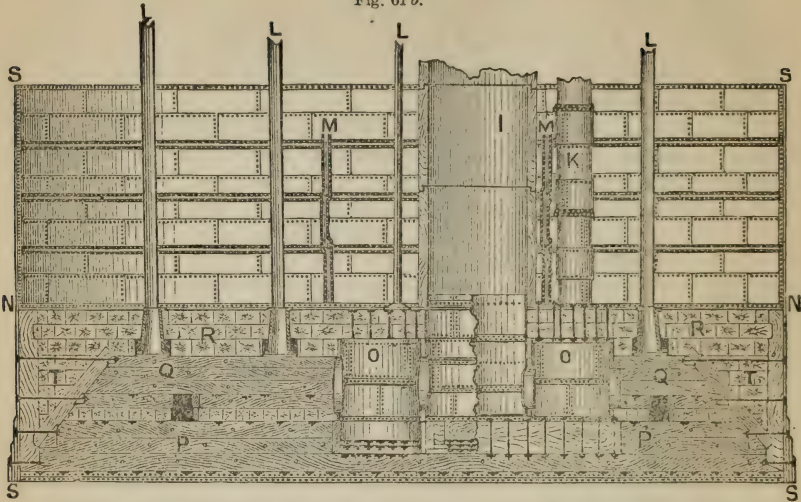

The main shaft had two air-locks at the lower end, each 8 feet in diameter, having about four times the capacity of the one used in the piers. There were also two other shafts and air-locks which were introduced to secure additional safety. This caisson was probably sunk to a greater depth than any other in the world by the pneumatic process.

It was sunk to the native rock, which was 136 feet below high-water mark, and 94 below the extreme low-water mark. It was about 110 feet below the surface of the water at the time it was completed. It was extremely hazardous to the health and even lives of workmen to be kept under the pressure of over three atmospheres for a long time. The greatest security was found in changing them every three or four hours.

Candles burned very readily at this depth and pressure. After a depth of about 80 feet was reached, the candles were inclosed in a strong glass globe, the inside of which communicated with one of the shafts, and the pressure was regulated by a small tube passing through the globe and containing a check valve. In this way the candles burned in an atmosphere whose pressure was about the same as the external air. (*See London Engineering, 1870 and 1871.*)

East River Bridge. The caisson for this bridge is composed almost wholly of wood. The air-chamber (Fig. 62) is nine feet six inches high, the roof being made of fifteen courses of timbers, one foot thick, the lower five (A) being

laid solid, the upper ten (C) crossing in alternate layers, and placed about a foot apart, the spaces between the timbers being filled with concrete. The sides (B) of the air-chamber are V shape, made very solid, nine feet thick at top, and eight inches at the bottom, which is heavily shod with iron. Between

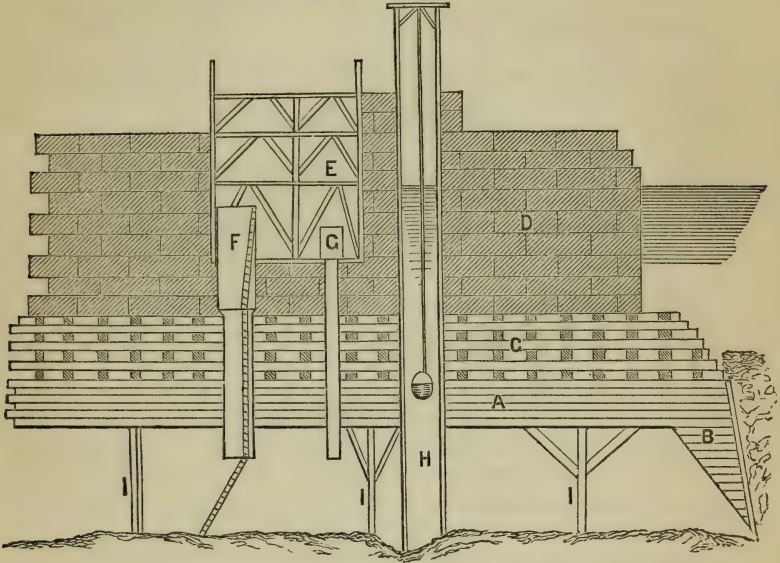


Fig. 62 represents a vertical section of the Brooklyn Caisson of the East River Bridge.
 A, lower timber courses of roof, laid solid.
 B, timber sides of air-chamber.
 C, upper timber courses of roof, laid crosswise, and spaces filled in with concrete.
 D, masonry of pier.
 E, dam to prevent water from reaching shafts.
 F, air-shaft and lock.
 G, supply shaft.
 H, excavation shaft.
 I, heavy timber partitions.
 K, air-chamber.

the fourth and fifth courses of the roof is laid a sheet of tin, which is continued down underneath the outside sheathing. The air-chamber is divided into six compartments by heavy timber girders. The shafts through which the heavy material is raised extend below the level of the excavation at the bottom, and are constantly open; but the compressed air is prevented from escaping by a column of water, which is maintained at nearly the same height as the water in the river by the pressure of the compressed air. If the pressure of the air should be made to greatly exceed that at which it is ordinarily maintained, it would blow all the water out of the shaft

and the air would entirely escape, but every necessary precaution was used to keep a proper pressure of the air. An accident of this kind once took place in the Brooklyn caisson.

VII.

CONSTRUCTION OF MASONRY.

460. Under this head will be comprised whatever relates to the manner of determining the forms and dimensions of the most important elementary components of structures of masonry, together with the practical details of their construction.

461. Foundation Courses. As the object of the foundations is to give greater stability to the structure by diffusing its weight over a broad surface, their breadth, or *spread*, should be proportioned both to the weight of the structure and to the resistance offered by the subsoil. In a perfectly unyielding soil, like hard rock, there will be no increase of stability by augmenting the base of the structure beyond what is strictly necessary for stability in a lateral direction; whereas in a very compressible soil, like soft mud, it would be necessary to make the base of the foundation very broad, so that by diffusing the weight over a great surface, the subsoil may offer sufficient resistance, and any unequal settling be obviated.

462. The thickness of the foundation course will depend on the spread; the base is made broader than the top for motives of economy. This diminution of the volume (Fig. 63)




Fig. 63—Section of foundation courses and superstructure.

A, batter.
B, offsets.
C, superstructure.

is made either in steps, termed *offsets*, or else by giving a uniform batter from the base to the top.

When the foundation has to resist only a vertical pressure,

an equal batter is given to it on each side; but if it has to resist also a lateral effort, the spread should be greater on the side opposed to this effort, in order to resist its tendency, which would be to cause a yielding on that side.

463. The bottom course of the foundations is usually formed of the largest sized blocks, roughly dressed off with the hammer; but if the bed is compressible, or the surfaces of the blocks are winding, it is preferable to use blocks of a small size for the bottom course; because these small blocks can be firmly settled, by means of a heavy beetle, into close contact with the bed, which cannot be done with large-sized blocks, particularly if their under surface is not perfectly plane. The next course above the bottom one should be of large blocks, to bind in a firm manner the smaller blocks of the bottom course, and to diffuse the weight more uniformly over them.

464. When a foundation for a structure rests on isolated supports, like the pillars, or columns of an edifice, an *inverted* or *counter-arch*, (Fig. 64,) should connect the top course of the foundation under the base of each isolated support, so that the pressure on any two adjacent ones may be distributed over the bed of the foundation in the interval between them. This precaution is obviously necessary in compressible soils.

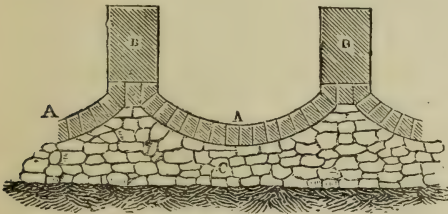


Fig. 64.—Section of vertical supports on reversed arches.

A, reversed arch.

B, vertical supports.

C, bed of stone.

The reversed arch is also used to give greater breadth to the foundations of a wall with counterforts, and in cases where an upward pressure from water, or a semi-fluid soil requires to be counteracted. In the former case the reversed arches are turned under the counterforts; in the latter they form the points of support of the walls of the structure.

465. The angles of the foundations should be formed of the most massive blocks. The courses should be carried up uniformly throughout the foundation, to prevent unequal settling in the mass.

The stones of the top course of the foundation should be

sufficiently large to allow the course of the superstructure next above to rest on the exterior stones of the top course.

466. Hydraulic mortar should be used for the foundations, and the upper courses of the structure should not be commenced until the mortar has partially set throughout the entire foundation.

467. Component parts of Structures of Masonry. These may be divided into several classes, according to the efforts they sustain; their forms and dimensions depending on these efforts.

1st. Those which sustain only their own weight, and are not liable to any cross strain upon the blocks of which they are formed, as the walls of enclosures.

2d. Those which, besides their own weight, sustain a vertical pressure arising from a weight borne by them, as the walls of edifices, columns, the piers of arches, &c.

3d. Those which sustain lateral pressures, and cross strains upon the blocks, arising from the action of the earth, water, frames or arches.

4th. Those which sustain a vertical upward, or downward pressure, and a cross strain, as areas, lintels, &c.

5th. Those which transfer the pressure they directly receive to lateral points of supports, as arches.

468. Walls of Enclosure. Walls for these purposes may be built of brick, rubble, or dry stone.

Brick walls are usually built vertically upon the two faces; and their thickness cannot be less than that of one brick.

Rubble stone walls should never receive a thickness less than 18 inches when the two faces are vertical. Rondelet, in his work *l'Art de Bâtir*, lays down a rule that the mean thickness of both rubble and brick walls should be $\frac{1}{10}$ of their height; but rubble stone walls are rarely made so thin as this.

Dry stone walls should not receive a less thickness than two feet. When their height exceeds 12 feet, their mean thickness should not be less than $\frac{1}{6}$ of the height.

Stone walls are usually built with sloping faces. The batter should not be greater, when the stones are cemented with mortar, than one base to six perpendicular, in order that the rain may run rapidly from the surface, and that the wall be not too much exposed to decay from the germination of seeds which may lodge in the joints.

The batter is arranged either by building the wall in offsets from top to bottom, or by a uniform surface. In either case, the thickness of the wall at top should not be less than from 8 to 12 inches.

When a wall is built with an equal batter on each face, and the thickness at the top and the mean thickness are fixed, *the base of the wall*, or its thickness at the bottom, *will be found by subtracting the thickness at top from twice the mean thickness*. This rule evidently makes the batter of the wall depend upon the two preceding dimensions.

The mean thickness of long walls may be advantageously diminished by placing counterforts, or buttresses, upon each face at equal distances along the line of the wall. These are spurs of masonry projecting some length from the wall, and are firmly connected with it by a suitable bond. The horizontal section of the counterforts may be rectangular; their height should be the same as that of the wall.

469. Vertical Supports. These consist of walls, columns, or pillars, according to circumstances. The dimensions of the courses of masonry which compose the supports should be regulated by the weight borne. If, as in the walls of edifices, the resultant of the efforts sustained by the wall should not be vertical, it must not intersect the base of the wall so near the outer edge, that the stone forming the lowest course would be in danger of being crushed.

Cross walls between the exterior walls, as the partition walls of edifices, should be regarded as counterforts which strengthen the main walls.

470. Areas. The term *area* is applied to a mass of masonry, usually of a uniform thickness, laid over the ground enclosed by the foundations of walls. It seldom happens that areas have an upward pressure to sustain. Whenever this occurs, as in the case of the bottoms of cellars in communication with a head of water which causes an upward pressure, the thickness and arrangement of the area should be regulated to resist this pressure. When the pressure is considerable, an area of uniform thickness may not be sufficiently strong to ensure safety; in this case an *inverted arch* must be used. The foundation of the Capitol building at Albany, N. Y., rests on an immense *area*, which is formed of successive layers of broken stone and concrete, making an *area* of several feet in thickness. The first stones of the piers are very large and flat and nearly cover the whole *area* so that there is little or no danger of an upward pressure.

471. Retaining or Sustaining Walls. These terms are applied to walls which sustain a lateral pressure from an embankment, or a head of water.

472. Retaining walls may yield by sliding either along the base of the foundation courses, or along one of the horizontal

joints, or by rotation about the exterior edge of some one of the horizontal joints, or the line of fracture may be oblique to the base.

473. The determination of the form and dimensions of a retaining wall for an embankment of earth is a problem of considerable intricacy, and the mathematical solutions which have been given of it have generally been confined to particular cases, for which approximate results alone have been obtained; these, however, present sufficient accuracy for all practical purposes within the limits to which the solutions are applicable. Among the many solutions of this problem, those given by M. Poncelet, of the Corps of French Military Engineers, in a Memoir on this subject, published in the *Mémoires de l'Officier du Génie*, No. 10, present a degree of research and completeness which peculiarly characterize all the writings of this gentleman, and have given to his productions a claim to the fullest confidence of practical men.

The following formula, applicable to cases of rotation about the exterior edge of the lowest horizontal joint, are taken from the memoir above cited.

Calling H , the height BC (Fig. 65) of a wall of uniform thickness, the face and back being vertical.

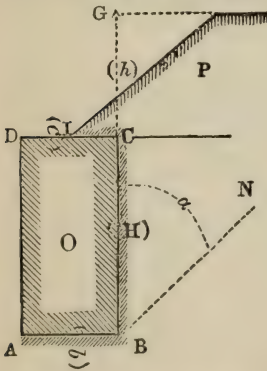


Fig. 65.—Represents a section O of a retaining wall with the face and back vertical.
 P , section of the embankment above the wall.

h , the mean height CG of the embankment, retained by the wall, above the top of the wall.

c , the *berm* DI , or distance between the foot of the embankment and the outer edge of the top of the wall.

a , the angle between the line of the natural slope BN of the earth of the embankment and the vertical BG .

$f = \cot. a$, the co-efficient of friction of the earth of the embankment.

w , the weight of a cubic foot of the earth.

w' , the weight of a cubic foot of the masonry of the wall.
 b , the base AB, or thickness of the wall at bottom.

Then,

$$b = 0.74 \tan. \frac{1}{2} \alpha \sqrt{\frac{w}{w'}} (h + 1.126H) + 0.0488h - 0.56c \tan. \alpha \left(\frac{h}{H} - 0.6 \frac{w}{w'} \right) \left(\frac{h}{H} - 0.25 \right).$$

The above formula gives the value of the base of a wall with vertical faces, within a near degree of approximation to the true result, only when the values of the quantities which enter into it are confined within certain limits. These limits are as follows: for h , between 0 and H ; c , between 0 and $\frac{1}{3}H$; f , between 0.6 and 1.4 , which correspond to values of α of 70° and 35° , being in the one case the angle which the line of the natural slope of very fine dry sand assumes, and in the other of heavy clayey earth; and for w , between w' , and $\frac{2}{3}w'$. Besides these limits, the formula also rests on the assumption that the moment of the pressure against the wall is 1.912 times the moment of strict equilibrium between it and the wall. This excess of stability given to the wall supposes an excess of resistance above the pressure against it equal to what obtains in the retaining walls of Vauban, for fortifications which have now stood the test of more than a century with security.

474. Having by the preceding formula calculated the value of b for a vertical wall, the base b' of another wall, presenting equal stability, but having a batter on the face, the back being vertical, which is the usual form of the cross sec-




Fig. 66—Represents a section O of a retaining wall with a sloping face AD. P, section of the embankment.

tion of retaining walls, can be calculated from the following notation and formula.

Calling (Fig. 66) b' the base of the sloping wall.

$n = \frac{Ad}{Dd'}$ the batter, or ratio of the base of the slope to the perpendicular, or height of the wall.

Then,

$$b' = b + \frac{1}{10}nH.$$

475. With regard to sliding either on the base of the foundation courses, or on the bed of any of the horizontal joints of the wall, M. Poncelet shows, in the memoir cited, by a comparison of the results obtained from calculations made under the suppositions both of rotation and sliding, that no danger need be apprehended from the latter, when the dimensions are calculated to conform to the former, so long as the limits of h are taken between 0 and $4H$; particularly if the precaution be taken to allow the mortar of the masonry to set firmly before forming the embankment behind the wall.

476. Mr. C. S. Constable read a paper before the American Society of Civil Engineers in New York, in 1873, in which he showed by means of a model and experiments that the prism which produces the maximum thrust or pressure was less than GCD. The wall, when composed of blocks, will not turn over bodily about the outer edge, but there will be a broken line of fracture as shown by the heavy line in (Fig. 67), the general direction of which corresponds to the natural slope

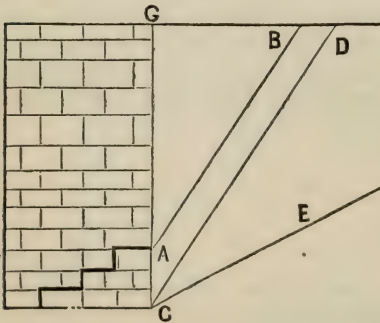


Fig. 67.—C G is the back of the wall. C E represents the natural slope of the earth. G C D the prism which gives the maximum pressure. A B a line parallel to C D.

of the earth, although the two have not necessarily the same direction. This being the case, it is evident that a portion of the prism GCD will not be active in overturning the wall, but on the other hand will prevent, or tend to prevent, a portion of the back of the wall from moving with the main part. As a result of this investigation it is evident that the formulas which are founded on the supposition that the whole of the prism GCD is active in producing a rotation of the wall

err on the safe side, and give an unnecessarily large margin for safety.

His experiments also showed that the wall might start to fall but not fall, and that it required considerable jarring to cause it to fall. When the movement began the face did not remain plane but became curved. This shows why in practice walls have assumed a curved face, and yet stand securely for many years. After a slight movement has taken place, the pressure due to the earth is slightly relieved, and the whole mass takes up a new position of equilibrium, until finally the earth nearly supports itself.

477. Form of Section of Retaining Walls. The more usual form of cross section is that in which the back of the wall is built vertically, and the face with a batter varying between one base to six perpendicular, and one base to twenty-four perpendicular. The former limit having been adopted, for the reasons already assigned, to secure the joints from the effects of weather; and the latter because a wall having a face more nearly vertical is liable in time to yield to the effects of the pressure, and lean forward.

478. The most advantageous form of cross section for economy of masonry is the one (Fig. 68) termed a *leaning*




Fig. 68—Represents a section O of a leaning retaining wall with a sloping face AD and the back BC counter-sloped.

retaining wall. The counter slope, or reversed batter of the back of the wall, should not be less than six perpendicular to one base. In this case strength requires that the perpendicular let fall from the centre of gravity of the section upon the base, should fall so far within the inner edge of the base, that the stone of the bottom course of the foundation may present sufficient surface to bear the pressure upon it.

479. Walls with a curved batter (Fig. 69) both upon the face and back, have been used in England, by some engineers, for quays. They present no peculiar advantages in strength

over walls with plane faces and backs, and require particular care in arranging the bond, and fitting the stones or bricks of the face.

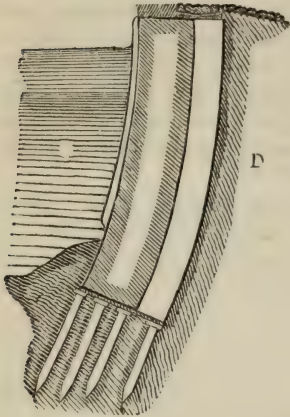


Fig. 69—Represents a section A of a wall with a curved face and back, and an elevation B of the counterforts.

C, water.

D, embankment behind the wall.

a, fender beams of timber.

480. Measures for increasing the Strength of Retaining Walls. These consist in the addition of counterforts, in the use of relieving arches, and in the modes of forming the embankment.

481. Counterforts give additional strength to a retaining wall in several ways. By dividing the whole line of the wall into shorter lengths between each pair of counterforts, they prevent the horizontal courses of the wall from yielding to the pressure of the earth, and bulging outward between the extremities of the walls; by receiving the pressure of the earth on the back of the counterfort, instead of on the corresponding portion of the back of the wall, its effect in producing rotation about the exterior foot of the wall is diminished; the sides of the counterforts acting as abutments to the mass of earth between them may, in the case of sand, or like soil, cause the portion of the wall between the counterforts to be relieved from a part of the pressure of the earth behind it, owing to the manner in which the particles of sand become buttressed against each other when confined laterally, and offer a resistance to pressure.

482. The horizontal section of counterforts may be either rectangular or trapezoidal. When placed against the back of a wall, the rectangular form offers the greater stability in the case of rotation, and is more economical in construction; the trapezoidal form gives a broader and therefore a firmer con-

nection between the wall and counterfort than the rectangular, a point of some consideration where, from the character of the materials, the strength of this connection must mainly depend upon the strength of the mortar used for the masonry.

483. Counterforts have been chiefly used by military engineers for the retaining walls of fortifications, termed *revêtements*. In regulating their form and dimensions, the practice of Vauban has generally been followed, which is to make the horizontal section of the counterfort trapezoidal, making the height of the trapezoid ef (Fig. 70), which corresponds to the

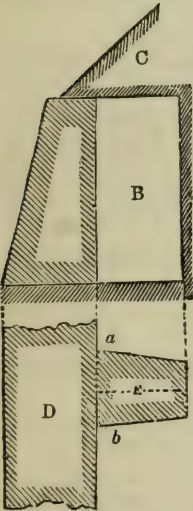


Fig. 70—Represents a section A and plan D of a wall, and an elevation B, and plan E of a trapezoidal counterfort.

length of the counterfort, *two-tenths of the height of the wall added to two feet*, the base of the trapezoid ab corresponding to the junction of the counterfort and back of the wall, *one-tenth of the height added to two feet*, and the side cd which corresponds to the back of the counterfort equal to two-thirds of the base ab . The counterforts are placed from 15 to 18 feet from centre to centre along the back of the wall, according to the strength required.

484. In adding counterforts to walls, the practice has generally been to regard them only as giving additional stability to the wall, and not as a means of diminishing its volume of masonry of which the addition of the counterforts ought to admit.

485. *Relieving Arches* are so termed from their preventing a portion of the embankment from resting against the back

of the wall, and thus relieving it from a part of the pressure. They consist (Fig. 71) of one or more tiers of brick arches




Fig. 71—Represents a section M and an elevation N of a wall and relieving arches in three tiers.

A, section of the wall.

c, c, c, sections of the arches through their crowns.

d, d, interior elevations of counterforts serving as piers of the arches.

e, e, interior end elevations of arches.

built upon counterforts, which act as the piers of the arches.

In arranging a combination of relieving arches and their piers, the latter, like ordinary counterforts, are placed about 18 feet apart between their centre lines; their length should be so regulated that the earth behind them resting on the arches, and falling under them with the natural slope, shall not reach the wall between the arch and the foot of the back of the wall below the arch. The thickness of the arches, as well as that of the counterforts, will depend upon the weight which the arches sustain. The dimensions of the wall will be regulated by the decreased pressure against it caused by the action of the arches, and the point at which this pressure acts.

486. Whenever it becomes necessary to form the embankment before the mortar of the retaining wall has had time to set firmly, the portion of the embankment next to the wall may be of a compact binding earth placed in layers inclining downward from the back of the wall, and well rammed; or of a stiff mortar made either of clay, or sand, with about $\frac{1}{10}$ th in bulk of lime. Instead of bringing the embankment directly against the back of the wall, dry stone, or fascines may be laid in to a suitable depth back from the wall for the same purpose. *The precaution, however, of allowing the mortar to set firmly before forming the embankment, should never be omitted except in cases of extreme urgency, and then the bond of the masonry should be arranged with peculiar care, to prevent disjunction along any of the horizontal joints.*

487. Walls built to sustain a pressure of water should be regulated in form and dimensions like the retaining walls of embankments. The buoyant effort of the water must be taken into account in determining the dimensions of the wall, whenever the masonry is so placed as to be partially immersed in the water.

488. Heavy walls, and even those of ordinary dimensions, when exposed to moisture, should be laid in hydraulic mortar. Grout has been tried in laying heavy rubble walls, but with decided want of success, the successive drenchings of the stone causing the sand to separate from the lime, leaving when dry a weak porous mortar. When the stone is laid in full mortar, grout may be used with advantage over each course, to fill any voids left in the mass.

489. Beton has frequently been used as a filling between the back and facing of water-tight walls; it presents no advantage over walls of cut, or rubble stone laid in hydraulic mortar, and causes unequal settling in the parts, unless great care is taken in the construction.

490. When a weight, arising from a mass of masonry or earth, rests upon two or more isolated supports, that portion of it which is distributed over the space, or *bearing* between any two of the supports, may be borne by a block of stone, termed a *lintel*, laid horizontally upon the supports, by a combination of blocks termed a *plate-bande*, so arranged as to resist, without disjunction, the pressure upon them; or by an arch.

491. **Lintel.** Owing to the slight resistance of stone to a cross strain, and to shocks, lintels of ordinary dimensions cannot be used alone with safety, for bearings over five or six feet. For wider bearings, a slight brick arch is thrown across the bearing above the lintel, and thus relieves it from the pressure of the parts above.

492. **Plate-bande.** The plate-bande is a combination of blocks cut in the form of truncated wedges. From the form of the blocks, the pressure thrown upon them causes a lateral pressure which must be sustained either by the supports, or by some other arrangement (Fig. 72).

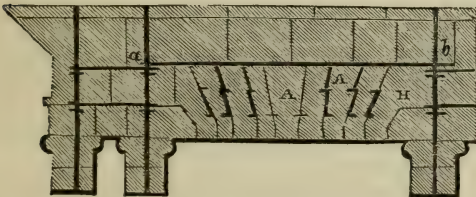


Fig. 72—Represents a cross section of a plate-bande, showing the manner in which the voussoirs A, A and B are cut and connected by metal cramps. *ab*, tie of wrought iron for the plate-bande fastened to the bolts *ca*, let into the piers of the plate-bande.

The plate-bande should be used only for narrow bearings, as the upper edges of the blocks at the acute angles are liable to splinter from the pressure. If the bearing exceeds 10 feet, the plate-bande should be relieved from the pressure

by a brick arch above it. Additional means of strengthening the plate-bande are sometimes used by forming a broken joint between the blocks, or by a projection made on the face of one block to fit into a corresponding indent in the adjacent one, or by connecting the blocks with iron bolts.

When, from any cause, the supports cannot be made sufficiently strong to resist the lateral pressure of the plate-bande, the extreme blocks must be united by an iron bar, termed a *tie*, suitably arranged to keep the blocks from yielding.

493. Arches. The arch is a combination of wedge-shaped blocks, termed *arch stones*, or *voussoirs*, truncated towards the angle of the wedges by a curved surface which is usually normal to the surfaces of the joints between the blocks. This inferior surface of the arch is termed the *soffit*. The upper, or outer surface of the arch is termed the *back* (Fig. 73).

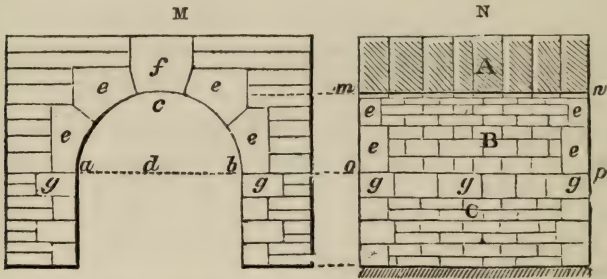


Fig. 73—Represents an elevation M of the head of a right cylindrical arch, and a section N through the crown of the arch A, with an elevation B of the soffit and the face C of the abutment.

- ab*, span of the arch.
- dc*, rise.
- acb*, curve of the intrados.
- e, e*, voussoirs forming ring courses of heads.
- f*, key stone.
- g*, cushion stone of abutment.
- mn*, crown of the arch.
- op*, springing line.

494. The extreme blocks of the arch rest against lateral supports, termed *abutments*, which sustain both the vertical pressure arising from the weight of the arch stones, and the weight of whatever lies upon them; also the lateral pressure caused by the action of the arch.

495. In a *range*, or series of arches placed side by side, the extreme supports are termed the abutments, the intermediate supports which sustain the intermediate arches and the halves of the two extreme ones are termed *piers*. When the size of the arches is the same, and their springing lines are

in the same horizontal plane, the piers receive no other pressure but that arising from the weight of the arches.

496. Arches are classified, from the form of the soffit, into *cylindrical, conical, conoidal, warped, annular, groined, cloistered,* and *domes*. They are also termed *right, oblique,* or *askew,* and *rampant,* from their direction with respect to a vertical, or horizontal plane.

497. Cylindrical, groined and cloistered arches are formed by the intersections of two or more cylindrical arches. The span of the arches may be different, but the rise is the same in each. The axes of the cylinders will be in the same plane, and they may intersect under any angle.

The groined arch (Fig. 74) is formed by removing those

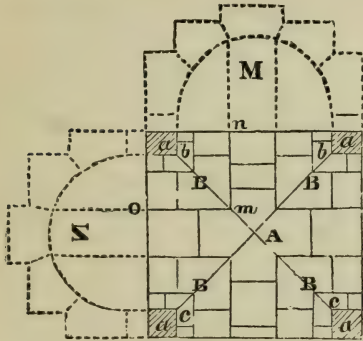


Fig. 74—Represents the plan of the soffit and the right sections M and N of the cylinders forming a groined arch.

aa, pillars supporting the arch.

bc, groins of the soffit.

om, mn, edges of coursing joints.

A, key-stone of the two arches formed of one block.

B, B, groin stones of one block below the key-stone forming a part of each arch.

portions of each cylinder which lie under the other and between their common curves of intersection; thus forming a projecting, or salient edge on the soffit along these curves.

The cloistered arch (Fig. 75) is formed by removing those portions of each cylinder which are above the other and exterior to their common intersection, forming thus re-entering angles along the same lines.

498. The planes of the joints in both of these arches are placed in the same manner as in the simple cylindrical arch. The inner edges of the corresponding course of voussoirs in each arch are placed in the same plane parallel to that of the axes of the cylinders. The portions of the soffit in each cylinder, corresponding to each course of voussoirs, which form either the groin in the one case, or the re-entering angle in the other, are cut from a single stone, to present no joint along the common intersection of the arches, and to give them a firmer bond.

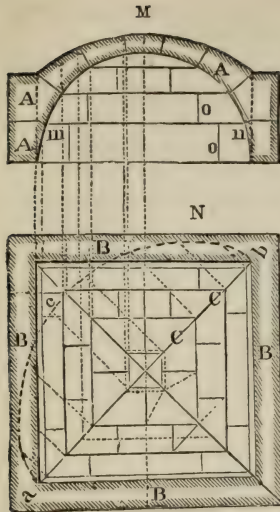


Fig. 75—Represents a section M of the voussoirs and an elevation of the soffit of a cloistered arch with a plan N of the soffit.

A, A, voussoirs.
nn, edge of coursing joint.
o, o, edges of heading joints.
 B, B, abutments of the arches.
acb, curve of the groin.
 C, C, groin stones of one block.

499. When the spans at the two ends of an arch are unequal, but the rise is the same, then the soffit of the arch is made of a conoidal surface. The curves of right section at the two ends may be of any figure, but are usually taken from some variety of the elliptical, or oval curves. The soffit is formed by moving a line upon the two curves, and parallel to the plane containing their spans.

The conoidal arch belongs to the class with warped soffits. A variety of warped surfaces may be used for soffits according to circumstances; the joints and the bond depending on the generation of the surface.

500. In arranging the joints in conoidal arches, the heading joints are contained in planes perpendicular to the axis of the arch. The coursing joints are also formed of plane surfaces, so arranged that the portion of the joint corresponding to each block is formed by a plane normal to the conoid at the middle point of the lower edge of the block. In this way the joints of the string course will not be formed of continuous surfaces. To make them so, it would be necessary to give them the form of warped surfaces, which present more difficulty in their mechanical execution, and not sufficient advantages over the method just explained to compensate for having them continuous.

501. The annular arch is formed by revolving the plane of a semi-circle, or semi-oval, or other curve, about a line drawn

without the figure and parallel to the rise of the arch (Fig. 76). One series of joints in this arch will be formed by conical surfaces passing through the inner edges of the stones which correspond to the string courses; and the other series will be planes passed through the axis about which the semi-circle is revolved. This last series should break joints with each other.

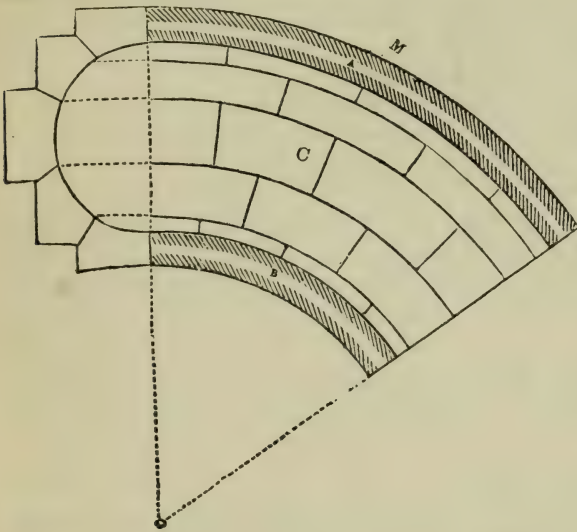


Fig. 76—Represents a plan M of the abutments A and B, and the soffit C of an annular arch. N, right section of the arch. a, position of vertical axis around which the section N is revolved.

502. The soffit of a dome is usually formed by revolving the quadrant of one of the usual curves of cylindrical arches around the rise of the curve; or else by revolving the semi-curve about the line of the span, and taking the half of the surface thus generated for the soffit of the dome. In the first of these cases the horizontal section of the dome at the springing line will be a circle; in the second the entire curve of the semi-curve by which the soffit is generated. The plan of domes may also be of regular polygonal figures, in which case the soffit will be a polygonal-cloistered arch formed of equal sections of cylinders (Fig. 77). The joints and the bond are determined in the same manner as in other arches.

503. The voussoirs which form the ring course of the heads, in ordinary cylindrical arches, are usually terminated by plane surfaces at top and on the sides, for the purpose of connecting them with the horizontal courses of the head which

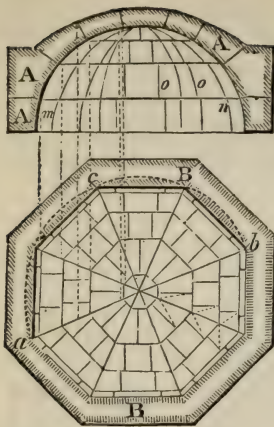


Fig. 77—Represents a section M of the voussoirs and an elevation of the soffit, with a plan N of the soffit of an octagonal-cloistered dome. The letters refer to the same parts as in Fig. 75.

lie above and on each side of the arch (Figs. 78 and 79). This connection may be arranged in a variety of ways. The two points to be kept in view are, to form a good bond between the voussoirs and horizontal courses, and to give a pleasing




Fig. 78—Represents a manner of connecting the voussoirs and horizontal courses in an oval arch. *o, o,* are examples of voussoirs with elbow joints.



Fig. 79—Represents a mode of arranging the voussoirs and horizontal courses in flat segment arches.

architectural effect by the arrangement. This connection should always give a symmetrical appearance to the halves of the structure on each side of the crown. To effect these several objects it may be necessary, in cases of oval arches, to make the breadth of the voussoirs unequal, diminishing usually those near the springing lines.

504. In small arches the voussoirs near the springing line are so cut as to form a part also of the horizontal course (see Fig. 78), forming what is termed an *elbow joint*. This plan is objectionable, both because there is a waste of material in forming a joint of this kind, and the stone is liable to crack when the arch settles.

505. The forms and dimensions of the voussoirs should be determined both by geometrical drawings and numerical

calculation, whenever the arch is important, or presents any complication of form. The drawings should, in the first place, be made to a scale sufficiently large to determine the parts with accuracy, and from these, pattern drawings giving the parts in their true size may be made for the use of the mason. To make the pattern drawings, the side of a vertical wall, or a firm horizontal area may be prepared, with a thin coating of mortar, to receive a thin smooth coat of plaster of Paris. The drawing may be made on this surface in the usual manner, by describing the curve either by points from its calculated abscissas and ordinates, or, where it is formed of circular arcs, by using the ordinary instrument for describing such arcs when the centres fall within the limits of the prepared surface. In ovals the positions of the extreme radii should be accurately drawn either from calculation, or construction. To construct the intermediate normals, whenever the centres of the arcs do not fall on the surface, an arc with a chord of about one foot may be set off on each side of the point through which the normal is to be drawn, and the chord of the whole arc, thus set off, be bisected by a perpendicular. This construction will generally give a sufficiently accurate practical result for elliptical and other curves of a large size.

506. The masonry of arches may be either of dressed stone, rubble, or brick.

In wide spans, particularly for oval and other flat arches, cut stone should alone be used. The joints should be dressed with extreme accuracy. As the voussoirs have to be supported by a framing of timber, termed a *centre*, until the arch is completed, and as this structure is liable to yield, both from the elasticity of the materials and the number of joints in the frame, an allowance for the settling in the arch, arising from these causes, is sometimes made, in cutting the joints of the voussoirs *false*, that is, not according to the true position of the normal, but from the supposed position the joints will take when the arch has settled thoroughly. The object of this is to bring the surfaces of the joints into perfect contact when the arch has assumed its permanent state of equilibrium, and thus prevent the voussoirs from breaking by unequal pressures on their coursing joints. This is a problem of considerable difficulty, and it will generally be better to cut the joints true, and guard against settling and its effects by giving great stiffness to the centres, and by placing between the joints of those voussoirs, where the principal movement takes place in arches, sheets of lead suitably hammered to fit the joint and yield to any pressure.

507. The manner of laying the voussoirs demands peculiar care, particularly in those which form the heads of the arch. The positions of the inner edges of the voussoirs are determined by fixed lines, marked on the abutments, or some other immovable object, and the calculated distances of the edges from these lines. These distances can be readily set off by means of the level and plumb-line. The angle of each joint can be fixed by a quadrant of a circle, connected with a plumb-line, on which the position of each joint is marked.

508. Brick may be used alone, or in combination with cut stone, for arches of considerable size. When the thickness of a brick arch exceeds a brick and a half, the bond from the soffit outward presents some difficulties. If the bricks are laid in concentric layers, or *shells*, a continuous joint will be formed parallel to the surface of the soffit, which will probably yield when the arch settles, causing the shells to separate (Fig. 80). If the bricks are laid like ordinary string courses,

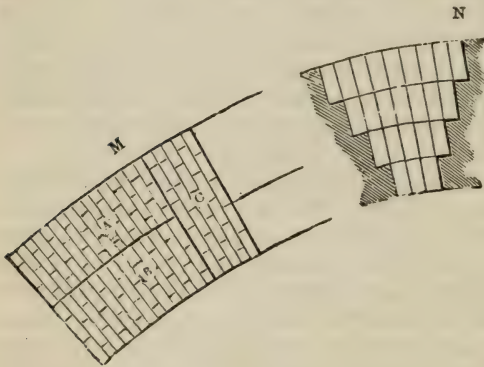


Fig. 80—Represents an end view, M, of a brick arch built with blocks, C, and shells, A and B.

N, represents the manner of arranging the courses of brick forming the crown of the arch.

forming continuous joints from the soffit outward, these joints, from the form of the bricks, will be very open at the back, and, from the yielding of the mortar, the arch will be liable to injury in settling from this cause. To obviate both of these defects, the arch may be built partly by the first plan and partly by the second, or as it is termed in shells and *blocks*. The crown, or key of the arch should be laid in a block, increasing the breadth of the block by two bricks for each course from the soffit outward. These bricks should be laid in hydraulic cement, and be well wedged with pieces of thin hard slate between the joints.

509. When a combination of brick and cut stone is used, the

ring courses of the heads, with some intermediate ring courses, the bottom string courses, the keystone course, and a few intermediate string courses, are made of cut stone (Fig. 81), the

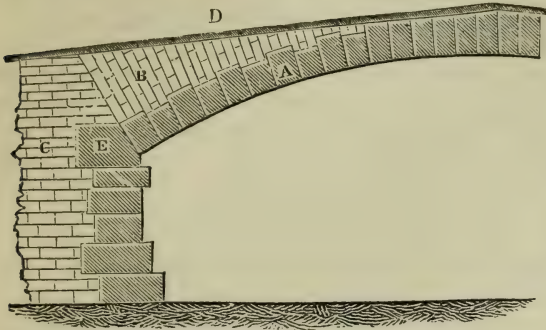


Fig. 81 — Represents a cross section of a stone segment arch, capped with brick and beton. A, stone voussoirs. B and D, brick and beton capping. C, abutment. E, cushion stone.

intermediate spaces being filled in with brick. The brick portions of the soffit may, if necessary, be thrown within the stone portions, forming plain *caissons*.

510. The centres of large arches should not be struck until the whole of the mortar has set firmly. After the centres are struck, the arch is allowed to assume its permanent state of equilibrium, before any of the superstructure is laid.

511. When the heads of the arch form a part of an exterior surface, as the faces of a wall, or the outer portions of a bridge, the voussoirs of the head ring courses are connected with the horizontal courses, as has been explained; the top surface of the voussoirs of the intermediate ring courses are usually left in a roughly dressed state to receive the courses of masonry termed the *capping* (see Fig. 81), which rests upon the arch between the walls of the head. Before laying the capping, the joints of the voussoirs on the back of the arch should be carefully examined, and, wherever they are found to be open from the settling of the arch, they should be filled up with soft-tempered mortar, and by driving in pieces of hard slate. The capping may be variously formed of rubble, brick, or beton. Where the arches are exposed to the filtration of rain water, as in those used for bridges and the casemates of fortifications, the capping should be of beton laid in layers, and well rammed, with the usual precautions for obtaining a solid homogeneous mass.

512. The difficulty of forming water-tight cappings of masonry has led engineers, within a few years back, to try a coating of asphalt upon the surface of beton. The surface

of the beton capping is made uniform and smooth by the trowel, or float, and the mass is allowed to become thoroughly dry before the asphalte is laid. Asphalte is usually laid on in two layers. Before applying the first, the surface of the beton should be thoroughly cleansed of dust, and receive a coating of mineral tar applied hot with a swab. This application of hot mineral tar is said to prevent the formation of air bubbles in the layers of asphalte which, when present, permit the water to percolate through the masonry. The first layer of asphalte is laid on in squares, or thin blocks, care being taken to form a perfect union between the edges of the squares by pouring the hot liquid along them in forming each new one. The surface of the first layer is made uniform, and rubbed until it becomes smooth and hard with an ordinary wooden float. In laying the second layer, the same precautions are taken as for the first, the squares breaking joints with those of the first. Fine sand is strewed over the surface of the top layer, and pressed into the asphalte before it becomes hard.

Coverings of asphalte have been used both in Europe and in our military structures for some years back with decided success. There have been failures, in some instances, arising in all probability either from using a bad material, or from some fault of workmanship.

513. In a range of arches, like those of bridges, or casemates, the capping of each arch is shaped with two inclined surfaces, like a common roof. The bottoms of these surfaces, by their junction, form gutters where the water collects, and from which it is conveyed off in conduits, formed either of iron pipes, or of vertical openings made through the masonry of the piers which communicate with horizontal covered drains. A small arch of sufficient width to admit a man to examine its interior, or a square culvert, is formed over the gutter. When the spaces between the head walls above the capping is filled in with earth, a series of drains running from the top, or *ridge* of the capping, and leading into the main gutter drain, should be formed of brick. They may be best made by using dry brick laid flat, and with intervals left for the drains, these being covered by other courses of dry brick with the joints in some degree open. The earth is filled in upon the upper course of bricks, which should be so laid as to form a uniform surface.

514. From observations taken on the manner in which large cylindrical arches settle, and experiments made on a small scale, it appears that in all cases of arches where the

rise is equal to or less than the half span they yield (Fig. 82) by the crown of the arch falling inward, and thrusting outward the lower portions, presenting five joints of rupture, one at the keystone, one on each side of it which limit the portions that fall inward, and one on each side near the springing lines which limit the parts thrust outward. In



Fig. 82—Represents the manner in which flat arches yield by rupture.

o, joint of rupture at the keystone.
m, m, joints of rupture below the keystone.
n, n, joints of rupture at springing lines.

pointed arches, or those in which the rise is greater than the half span, the tendency to yielding is, in some cases, different; here the lower parts may fall inward (Fig. 83), and thrust upward and outward the parts near the crown.




Fig. 83—Represents the manner in which pointed arches may yield.

The letters refer to same points as in Fig. 82.

The angle which a line drawn from the centre of the arch to the joint of rupture makes with a vertical line is called the *angle of rupture*. This term is also used when the arch is stable, or when there is no joint of rupture, in which case it refers to that point about which there is the greatest tendency to rotate. It may also be defined as including that portion of the arch near the crown which will cause the greatest *thrust* or horizontal pressure at the crown. This *thrust* tends to crush the *voussoirs* at the crown, and also to overturn the abutments about some outer joint. The thrust is rarely sufficient to crush ordinary stone. The most common mode of failure is by rupturing, or turning about a joint. In very thick arches rupture may take place from *slipping* on the joints.

515. The joints of rupture below the keystone vary in arches of different thicknesses and forms, and in the same arch with the weight it sustains.

516. The problem for finding the joints of rupture by calculation, and the consequent thickness of the abutments necessary to preserve the arch from yielding, has been solved

by a number of writers on the theory of the equilibrium of arches, and tables for effecting the necessary numerical calculations have been drawn up from their results to abridge the labor in each case.

517. In cloistered arches the abutments may be less than in an ordinary cylindrical arch of the same length; and in groined arches, in calculating the resistance offered by the abutments, the counter resistance offered by the weight of one portion in resisting the thrust of the other, must be taken into consideration.

518. When abutments, as in the case of edifices, require to be of considerable height, and therefore would demand extraordinary thickness, if used alone to sustain the thrust of the arch, they may be strengthened by the addition to their weight made in carrying them up above the imposts like the *battlements* and *pinnacles* in Gothic architecture; by adding to them ordinary, full, or arched buttresses, termed *flying buttresses*; or by using ties of iron connecting the *voussoirs* near the joints of rupture below the keystone. Tie-rods are evidently the safest expedient. The employment of these different expedients, their forms and dimensions, will depend on the character of the structure and the kind of arch. The iron tie, for example, cannot be hidden from view except in the plate-bande, or in very flat segment arches, and wherever its appearance would be unsightly some other expedient must be tried.

Circular rings of iron have been used to strengthen the abutments of domes, by confining the lower courses of the dome and relieving the abutment from the thrust.

519. In a range of arches of unequal size, the piers will have to sustain a lateral pressure occasioned by the unequal horizontal thrust of the arches. In arranging the form and dimensions of the piers this inequality of thrust must be estimated for, taking also into consideration the position of the imposts of the unequal arches.

520. **Precautions against Settling.** One of the most difficult and important problems in the construction of masonry, is that of preventing unequal settling in parts which require to be connected but sustain unequal weights, and the consequent ruptures in the masses arising from this cause. To obviate this difficulty requires on the part of the engineer no small degree of practical tact. Several precautions must be taken to diminish as far as practicable the danger from unequal settling. Walls sustaining heavy vertical pressures should be built up uniformly, and with great attention to the

bond and correct fitting of the courses. The materials should be uniform in quality and size; hydraulic mortar should alone be used; and the permanent weight not be laid on the wall until the season after the masonry is laid. As a farther precaution, when practicable, a trial weight may be laid upon the wall before loading it with the permanent one.

Where the heads of arches are built into a wall, particularly if they are designed to bear a heavy permanent weight, as an embankment of earth, the wall should not be carried up higher than the imposts of the arches until the settling of the latter has reached its final term; and as there will be danger of disjunction between the piers of the arches and the wall at the head, from the same cause, these should be carried up independently, but so arranged that their after-union may be conveniently effected. It would moreover be always well to suspend the building of the arches until the season following that in which the piers are finished, and not to place the permanent weight upon the arches until the season following their completion.

521. Pointing. The mortar in the joints near the surfaces of walls exposed to the weather should be of the best hydraulic lime, or cement, and as this part of the joint always requires to be carefully attended to, it is usually filled, or as it is termed *pointed*, some time after the other work is finished. The period at which pointing should be done is a disputed subject among builders, some preferring to point while the mortar in the joint is still fresh, or *green*, and others not until it has become hard. The latter is the more usual and better plan. The mortar for pointing should be poor, that is, have rather an excess of sand; the sand should be of a fine uniform grain, and but little water be used in tempering the mortar. Before applying the pointing, the joint should be well cleansed by scraping and brushing out the loose matter, and then be well moistened. The mortar is applied with a suitable tool for pressing it into the joint, and its surface is rubbed smooth with an iron tool. The practice among our military engineers is to use the ordinary tools for calking in applying pointing; to calk the joint with the mortar in the usual way, and to rub the surface of the pointing until it becomes hard. *To obtain pointing that will withstand the vicissitudes of our climate is not the least of the difficulties of the builder's art.* The contraction and expansion of the stone either causes the pointing to crack, or else to separate from the stone, and the surface water penetrating into the cracks thus made, when acted upon by frost, throws out the

pointing. Some have tried to meet this difficulty by giving the surface of the pointing such a shape, and so arranging it with respect to the surfaces of the stones forming the joint, that the water shall trickle over the pointing without entering the crack, which is usually between the bed of the stone and the pointing.

522. The term *flash pointing* is sometimes applied to a coating of hydraulic mortar laid over the face or back of a wall, to preserve either the mortar joints, or the stone itself, from the action of moisture, or the effects of the atmosphere. Mortar for flash pointing should also be made poor, and when it is used as a stucco to protect masonry from atmospheric action, it should be made of coarse sand, and be applied in a single uniform coat over the surface, which should be prepared to receive the stucco by having the joints thoroughly cleansed from dust and loose mortar, and being well moistened.

No pointing of mortar has been found to withstand the effects of weather in our climate on a long line of coping. Within a few years a pointing of asphalte has been tried on some of our military works, and has given thus far promise of a successful issue.

523. Stucco exposed to weather is sometimes covered with paint, or other mixtures, to give it durability. Coal tar has been tried, but without success in our climate. M. Raucourt de Charleville, in his work *Traité des Mortiers*, gives the following compositions for protecting exposed stuccoes, which he states to succeed well in all climates. For important work, three parts of linseed oil boiled with one-sixth of its weight of litharge, and one part of wax. For common works, one part of linseed oil, one-tenth of its weight of litharge, and two or three parts of resin.

The surfaces must be thoroughly dry before applying the compositions, which should be laid on hot with a brush.

524. **Repairs of Masonry.** In effecting repairs in masonry, when new work is to be connected with old, the mortar of the old should be thoroughly cleaned off wherever it is injured along the surface where the junction is effected, and the surface thoroughly wet. The bond and other arrangements will depend upon the circumstances of the case; the surfaces connected should be fitted as accurately as practical, so that by using but little mortar, no disunion may take place from settling.

525. An expedient, very fertile in its applications to hydraulic constructions, has been for some years in use among the French engineers, for stopping leaks in walls and renew-

ing the beds of foundations which have yielded, or have been otherwise removed by the action of water. It consists in injecting hydraulic cement into the parts to be filled, through holes drilled through the masonry, by means of a strong syringe. The instruments used for this purpose (Fig. 83 *a*) are usually cylinders of wood, or of cast iron; the bore uniform, except at the end, which is terminated with a nozzle of the usual conical form; the piston is of wood, and is driven down by a heavy mallet. In using the syringe, it is adjusted to the hole; the hydraulic cement in a semi-fluid state poured

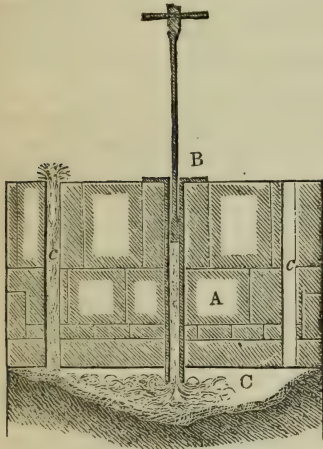


Fig. 83 *a*—Represents the arrangements for injecting hydraulic cement under a wall. A, section of the wall with vertical holes *c, c* drilled through it. B, syringe and piston for injecting the cement into the space C under the wall.

into it; a wad of tow, or a disk of leather being introduced on top before inserting the piston. The cement is forced in by repeated blows on the piston.

526. A mortar of hydraulic lime and fine sand has been used for the same purpose; the lime being ground fresh from the kiln, and used before slaking, in order that by the increase of volume which takes place from slaking, it might fill more compactly all interior voids. The use of unslaked lime has received several ingenious applications of this character; its after expansion may prove injurious when confined. The use of sand in mortar for injections has by some engineers been condemned, as from the state of fluidity in which the mortar must be used, it settles to the bottom of the syringe, and thus prevents the formation of a homogeneous mass.

527. **Effects of Temperature on Masonry.** Frost is the most powerful destructive agent against which the engineer has to guard in constructions of masonry. During severe

winters in the northern parts of our country, it has been ascertained, by observation, that the frost will penetrate earth in contact with walls to depths *exceeding ten feet*; it therefore becomes a matter of the first importance to use every practicable means to drain thoroughly all the ground in contact with masonry, to whatever depths the foundations may be sunk below the surface; for if this precaution be not taken, accidents of the most serious nature may happen to the foundations from the action of the frost. If water collects in any quantity in the earth around the foundations, it may be necessary to make small covered drains under them to convey it off, and to place a stratum of loose stone between the sides of the foundations and the surrounding earth to give it a free downward passage.

It may be laid down as a maxim in building, that *mortar which is exposed to the action of frost before it has set, will be so much damaged as to impair entirely its properties.* This fact places in a stronger light what has already been remarked, on the necessity of laying the foundations and the structure resting on them in hydraulic mortar, to a height of at least three feet above the ground; for, although the mortar of the foundations might be protected from the action of the frost by the earth around them, the parts immediately above would be exposed to it, and as those parts attract the moisture from the ground, the mortar, if of common lime, would not set in time to prevent the action of the frosts of winter.

In heavy walls the mortar in the interior will usually be secured from the action of the frost, and masonry of this character might be carried on until freezing weather commences; but still in all important works it will be by far the safer course to suspend the construction of masonry several weeks before the ordinary period of frost.

During the heats of summer, the mortar is injured by a too rapid drying. To prevent this the stone, or brick, *should be thoroughly moistened before being laid; and afterwards, if the weather is very hot, the masonry should be kept wet until the mortar gives indications of setting.* The top course should always be well moistened by the workmen on quitting their work for any short period during very warm weather.

The effects produced by a high or low temperature on mortar in a green state are similar. In the one case the freezing of the water prevents a union between the particles of the lime and sand; and in the other the same arises from the water being rapidly evaporated. In both cases the mortar when it has set is weak and pulverulent.

CHAPTER IV.

FRAMING.

528. FRAMING is the art of arranging beams of solid materials for the various purposes to which they are applied in structures. A *frame* is any arrangement of beams made for sustaining strains.

529. That branch of framing which relates to the combinations of beams of timber is denominated *Carpentry*.

530. Timber and iron are the only materials in common use for frames, as they are equally suitable to resist the various strains to be met with in structures. Iron, independently of offering greater resistance to strains than timber, possesses the further advantage of being susceptible of receiving the most suitable forms for strength without injury to the material; while timber, if wrought into the best forms for the object in view, may, in some cases, be greatly injured in strength.

531. The object to be attained in framing is to give, by a suitable combination of beams, the requisite degree of strength and stiffness demanded by the character of the structure, united with a lightness and an economy of material of which an arrangement of a massive kind is not susceptible. To attain this end, the beams of the frame must be of such forms, and be so combined that they shall not only offer the greatest resistance to the efforts they may have to sustain, but shall not change their relative positions from the effect of these efforts.

532. The forms of the beams will depend upon the kind of material used, and the nature of the strain to which it may be subjected, whether of tension, compression, or a cross strain.

533. The general shape given to the frame, and the combinations of the beams for this purpose, will depend upon the object of the frame and the directions in which the efforts act upon it.

In frames of timber, for example, the cross sections of each beam are generally uniform throughout, these sections being either circular, or rectangular, as these are the only simple

forms which a beam can receive without injury to its strength. In frames of cast-iron, each beam may be cast into the most suitable form for the strength required, considering the economy of the material.

534. In combining the beams, whatever may be the general shape of the frame, the parts which compose it must, as far as practicable, present triangular figures, each side of the triangles being formed of a single beam; the connection of the beams at the angular points, termed the *joints*, being so arranged that no yielding can take place. In all combinations, therefore, in which the principal beams form polygonal figures, secondary beams must be added, either in the directions of the diagonals of the polygon, or so as to connect each pair of beams forming an angle of the polygon, for the purpose of preventing any change of form of the figure, and of giving the frame the requisite stiffness. These secondary pieces receive the general appellation of *braces*. When they sustain a strain of compression they are termed *struts*; when one of extension, *ties*.

535. As one of the objects of a frame is to transmit the strain it directly receives to firm points of support, the beams of which it is formed should be so combined that this may be done in the way which shall have the least tendency to change the shape of the frame and to fracture the beams.

536. The points of support of a frame may be either above or below it. In the former case, the frame will consist of a suspended system, in which the polygon will assume a position of stable equilibrium, its sides being subjected to a strain of extension. In the latter case the frame, if of a polygonal form, must satisfy the essential conditions already enumerated, in order that its state of equilibrium shall be stable.

537. The object of the structure will necessarily decide the general shape of the frame, as well as the direction of the strains to which it will be subjected. An examination, therefore, of the frames adapted to some of the more usual structures will be the best course for illustrating both the preceding general principles and the more ordinary combinations of the beams and joints.

538. **Frames for Cross Strains.** The parts of a frame which receive a cross strain may be horizontal, as the beams, or *joists* of a floor; or inclined, as the beams, or *rafters* which form the inclined sides of the frame of a roof. The pressure producing the cross strain may either be uniformly distributed over the beams, as in the cases just cited, or it

may act only at one point, as in the case of a weight laid upon the beam.

In all of these cases the extremities of the beam should be firmly fixed against immovable points of support; the longer side of the rectangular section of the beam should be parallel to the direction of the strain, as this is the best position for strength.

If the distance between the points of support, or the *bearing*, be not great, the framing may consist simply of a row of parallel beams of such dimensions, and placed so far asunder as the strain borne may require. When the beams are




Fig. 84—Represents a cross section of horizontal beams *a, a* braced by diagonal battens *b*.

narrow, or the depth of the rectangle considerably greater than the breadth (Fig. 84), short struts of battens may be placed at intervals between each pair of beams, in a diagonal direction, uniting the bottom of the one with the top of the other, to prevent the beams from twisting, or yielding laterally. This also increases the stiffness of the structure by distributing the strains.

539. When the bearing and strain are so great that a single beam will not present sufficient strength and stiffness, a combination of beams, termed a *built beam*, which may be *solid*, consisting of several layers of timber laid in juxtaposition, and firmly connected together by iron bolts and straps—or *open*, being formed of two beams, with an interval between them, so connected by cross and diagonal pieces, that a strain upon either the upper or lower beam will be transmitted to the other, and the whole system act under the effect of the strain like a solid beam.

540. **Solid built Beams.** In framing solid built beams, the pieces in each course (Fig. 85) are laid abutting end to



Fig. 85—Represents a solid built beam of three courses, the pieces of each course breaking joints and confined by iron hoops.

end with a square joint between them, the courses breaking joints to form a strong bond between them. The courses are firmly connected either by iron bolts, formed with a screw and nut at one end to bring the courses into close con-

tact, or else by iron bands driven on tight, or by iron stirrups (Fig. 86) suitably arranged with screw ends and nuts for the same purpose.




Fig. 86—Represents an iron stirrup or hoop with nuts or female screws *c* which confine the cross piece of the stirrup *b*.

When the strain is of such a character that the courses would be liable to work loose and slide along their joints, the beams of the different courses may be made with shallow indentations (Figs. 87, 88), accurately fitting into each other ;



Fig. 87—Represents a solid built beam of three courses arranged with indentations and confined by iron hoops.




Fig. 88—Represents a solid built beam, the top part being of two pieces *b, b* which abut against a broad flat iron bolt *a*, termed a *king bolt*.

or shallow rectangular notches (Fig. 89) may be cut across each beam, being so placed as to receive blocks, or *keys* of




Fig. 89—Represents a solid built beam with keys *b, b* of hard wood between the courses.

hard wood. The keys are sometimes made of two wedge-




Fig. 90—Represents the keys in the form of double, or *folding wedges* *a, b* let into a shallow notch in the beam *c*.

shaped pieces (Fig. 90), for the purpose of causing them to fit the notches more closely, and to admit of being driven tight upon any shrinkage of the woody fibre.

The joints between the courses may be left slightly open without impairing in an appreciable degree the strength of the combination. This is a good method in beams exposed to

moisture, as it allows of evaporation from the free circulation of the air through the joints. Felt, or stout paper saturated with mineral tar, has been recommended to secure the joints from the action of moisture. The prepared material is so placed as to occupy the entire surface of the joint, and the whole is well screwed together.

541. Joints. A joint is the surface between two pieces which come in contact with each other, and which are connected together. The form and arrangement of joints will depend upon the relative position of the beams joined, and the object of the joint.

In all arrangements of joints, the axes of the beams connected should lie in the same plane in which the strain upon the frame acts; and the combination should be so arranged that the parts will accurately fit when the frame is put together, and that any portion may be displaced without disconnecting the rest. The simplest forms most suitable to the object in view will usually be found to be the best.

In adjusting the surfaces of the joints an allowance should be made for any settling in the frame which may arise either from the shrinking of the timber in seasoning while in the frame, or from the fibres yielding to the action of the strain. This is done by leaving sufficient play in the joints when the frame is first set up, to admit of the parts coming into perfect contact when the frame has attained its final settling. Joints formed of plane surfaces present more difficulty in this respect than curved joints, as the bearing surfaces in the latter case will remain in contact should any slight change take place in the relative positions of the beams from settling; whereas in the former a slight settling might cause the strains to be thrown upon a corner, or edge of the joint, by which the bearing surfaces might be crushed, and the parts of the framework wrenched asunder from the leverage which such a circumstance might occasion.

The surface of a joint subjected to pressure should be as great as practicable, to secure the parts in contact from being crushed by the strain; and the surface should be nearly perpendicular to the direction of the strain to prevent sliding.

A thin plate of iron, or lead, may be inserted between the surfaces of joints where, from the magnitude of the strain, one of them is liable to be crushed by the other, as in the case of the end of one beam resting upon the face of another.

542. Folding wedges, and pins, or *tree-nails*, of hard wood, are used to bring the surfaces of joints firmly to their bearings, and retain the parts of the frame in their places. The

wedges are inserted into square holes, and the pins into auger-holes made through the parts connected. As the object of these accessories is simply to bring the parts connected into close contact, they should be carefully driven, in order not to cause a strain that might crush the fibres.

To secure joints subjected to a heavy strain, bolts, straps, and hoops of wrought iron are used. These should be placed in the best direction to counteract the strain and prevent the parts from separating; and wherever the bolts are requisite they should be inserted at those points which will least weaken the joint.

543. Joints of Beams united end to end. When the axes of the beams are in the same right line, the form of the joint will depend upon the direction of the strain. If the strain is one of compression, the ends of the beams may be united by a square joint perpendicular to their axes, the joint being secured (Fig. 91) by four short pieces so placed as to embrace




Fig. 91—Represents the manner in which the end joint of two beams *a* and *b* is fished or secured by side pieces *c* and *d* bolted to them.

the ends of the beams, and being fastened to the beams and to each other by bolts. This arrangement, termed *fishing a beam*, is used only for rough work. It may also be used when the strain is one of extension; in which case the short pieces (Fig. 92) may be notched upon the beams, or else keys




Fig. 92—Represents a fished joint in which the side pieces *c* and *d* are either let into the beams or secured by keys *e*, *e'*.

of hard wood, inserted into shallow notches made in the beams and short pieces, may be employed to give additional security to the joint.

A joint termed a *scarf* may be used for either of the foregoing purposes. This joint may be formed either by halving



Fig. 93—Represents a scarf joint secured by iron plates *c, c*, keys, *d, d*, and bolts.

the beams on each other near their ends (Fig. 93), and securing the joints by bolts, or straps; or else by so arranging the ends of the two beams that each shall fit into shallow triangular notches cut into the other, the joint being secured by iron hoops. This last method is employed for round timber.

544. When beams united at their ends are subjected to a cross strain, a scarf joint is generally used, the under part of the joint being secured by an iron plate confined to the beams by bolts. The scarf for this purpose may be formed simply by halving the beams near their ends; but a more usual and better form (Fig. 94) is to make




Fig. 94—Represents a scarf joint for a cross strain secured at bottom by a piece of timber *c* confined to the beams by iron hoops *d, d* and keys *e, e*.

the portion of the joint at the top surface of the beams perpendicular to their axes, and about one third of their depth; the bottom portion being oblique to the axis, as well as the portion joining these two.

When the beams are subjected to a cross strain and to one of extension in the direction of their axes, the form of the scarf must be suitably arranged to resist each of these strains. The one shown in Fig. 95 is a suitable and usual form for



Fig. 95—Represents a scarf joint arranged to resist a cross strain and one of extension. The bottom of the joint is secured by an iron plate confined by bolts. The folding wedge key inserted at *c* serves to bring all the surfaces of the joints to their bearings.

these objects. A folding wedge key of hard wood is inserted into a space left between the parts of the joint which catch when the beams are drawn apart. The key serves to bring the surfaces of the joints to their bearings, and to form an abutting surface to resist the strain of extension. In this

form of scarf the surface of the joint which abuts against the key will be compressed; the portions of the beams just above and below the key will be subjected to extension. These parts should present the same amount of resistance, or have an equality of cross section. The length of the scarf should be regulated by the resistance with which the timber employed resists detrusion compared with its resistance to compression and extension.

545. When the axes of beams form an angle between them, they may be connected at their ends either by halving them on each other, or by cutting a mortise in the centre of one beam at the end, and shaping the end of the other to fit into it. See Fig. 97.

546. Joints for connecting the end of one beam with the face of another. The joints used for this purpose are termed *mortise and tenon joints*. Their form will depend upon the angle between the axes of the beams.

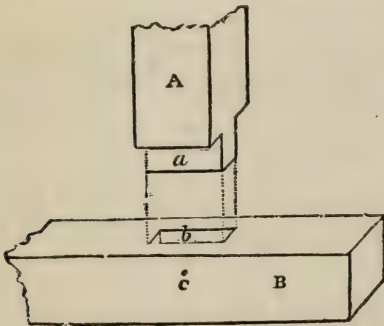


Fig. 96—Represents a mortise and tenon joint when the axes of the beams are perpendicular to each other.

a, tenon on the beam A.
b, mortise in the beam B.
c, pin to hold the parts together.

When the axes are perpendicular to each other, the mortise (Fig. 96) is cut into the face of the beam, and the end of the other beam is shaped into a tenon to fit the mortise.

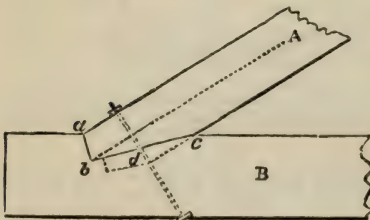


Fig. 97—Represents a mortise and tenon joint when the axes of the beams are oblique to each other. A notch whose surfaces *ab* and *bc* are at right angles is cut into the beam B, and a shallow mortise *d* is cut below the surface *bc*. The end of the beam A is arranged to fit the notch and mortise in B. The joint is secured by a screw bolt.

When the axes of the beams are oblique to each other, a triangular notch (Fig. 97) is usually cut into the face of

one beam, the sides of the notch being perpendicular to each other, and a shallow mortise is cut into the lower surface of the notch; the end of the other beam is suitably shaped to fit the notch and mortise.

The direction of the strain and the effect it may produce upon the joint must in all cases regulate its form. In some cases the circular joint may be more suitable than those forms which are plane surfaces; in others a double tenon may be better than the simple joint.

547. Tie Joints. These joints are used to connect beams which cross, or lie on each other. The simplest and strongest form of tie joint consists in cutting a notch in one or both of the beams to connect them securely. But when the beams do not cross, but the end of one rests upon the other, a notch of a trapezoidal form (Fig. 98) may be cut in the lower beam




Fig. 98—Represents an ordinary dove-tail joint secured by a pin at c.

to receive the end of the upper, which is suitably shaped to fit the notch. This, from its shape, is termed a *dove-tail joint*. It is of frequent use in joinery, but is not suitable for heavy frames where the joints are subjected to considerable strains, as it soon becomes loose from the shrinking of the timber.

548. Open built Beams. In framing open built beams, the principal point to be kept in view is to form such a connection between the upper and lower solid beams, that they shall be strained uniformly by the action of a strain at any point between the bearings. This may be effected in various ways, (Fig. 99.) The upper and lower beams may consist




Fig. 99—Represents an open built beam; A and B are the top and bottom rails or strings; a, a, cross pieces, either single or in pairs; b, diagonal braces in pairs; c, single diagonal braces.

either of single beams or of solid built beams; these are connected at regular intervals by pieces at right angles to them, between which diagonal pieces are placed. By this arrange-

ment the relative position of all the parts of the frame will be preserved, and the strain at any point will be brought to bear upon the intermediate points.

549. Framing for intermediate Supports. Beams of ordinary dimensions may be used for wide bearings when intermediate supports can be procured between the extreme points.

The simplest and most obvious method of effecting this is to place upright beams, termed *props*, or *shores*, at suitable intervals under the supported beam.

When the props would interfere with some other arrangement, and points of support can be procured at the extremities below those on which the beam rests, inclined struts (Fig. 100) may be used. The struts must have a suitably formed step at the foot, and be connected at top with the beam by a suitable joint.

In some cases the bearing may be diminished by placing



Fig. 100—Represents a horizontal beam C supported near the middle by inclined struts A, A.

on the points of support short pieces, termed *corbels* (Fig. 101), and supporting these near their ends by struts.



Fig. 101—Represents a horizontal beam c supported by vertical posts a, a, with corbel pieces d, d and inclined struts e, e to diminish the bearing.

In other cases a portion of the beam, at the middle, may be strengthened by placing under it a short beam, called a

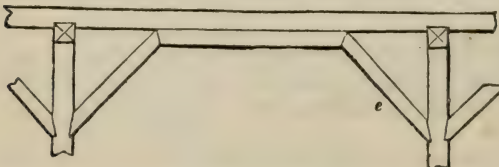


Fig. 102—Represents a horizontal beam c, strengthened by a straining beam f and inclined struts e, e.

straining beam (Fig. 102), against the ends of which the struts abut.

Whenever the bearing may require it the two preceding arrangements (Fig. 103) may be used in connection.

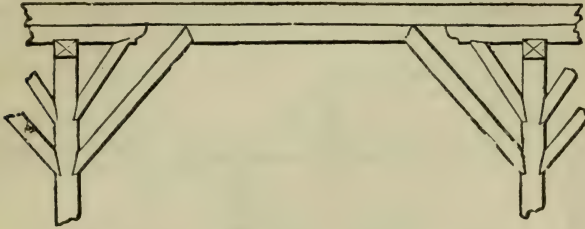


Fig. 103—Represents a combination of Figs. 101 and 102.

In all combinations with struts, a lateral thrust will be thrown on the point of support where the foot of the strut rests. This strain must be provided for in proportioning the supports.

550. When intermediate supports can be procured only above the beam, an arrangement must be made which shall answer the purpose of sustaining the beam at its intermediate points by suspension. The combination will depend upon the number of intermediate points required.

When the beam requires to be supported only at the middle, it may be done as shown in Fig. 104. If the suspending piece be of iron, it must be arranged at one end with a screw and nut. When the support is of timber, a single beam, called a *king post*, (Fig. 104,) may be used, against the head

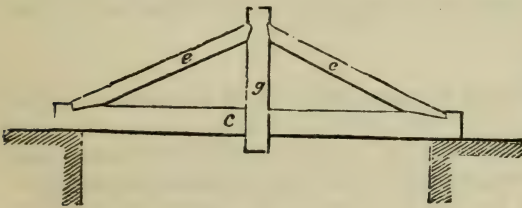


Fig. 104—Represents a horizontal beam *c* supported in its middle by a king post *g* suspended from the struts *e, e*.

of which the two inclined pieces may abut; the foot of the post is connected with the beam by a bolt, an iron stirrup, or a suitable joint. Instead of the ordinary king post, two beams may be used; these are placed opposite to each other and bolted together, embracing between them the supported beam and the heads of the inclined beams which fit into shallow notches cut into the supporting beams. Pieces arranged

in this manner for suspending portions of a frame receive the name of *suspension pieces*, or *bridle pieces*.

When two intermediate points of support are required, they may be obtained as shown in Fig. 105. The suspension

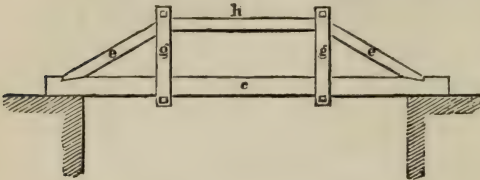


Fig. 105—Represents a beam *c* supported at two points by posts *g, g* suspended from the struts *e, e* and straining beam *h*.

pieces in this case may be either posts, termed *queen posts*, arranged like a king post, iron rods, or bridle pieces. This combination may be used for very wide bearings, (Fig. 106,) by suitably increasing the number of inclined pieces and straining beams.

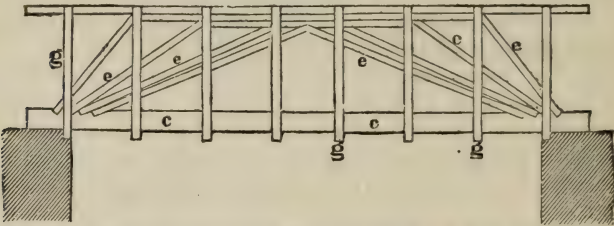


Fig. 106—Represents a beam *c* suspended from a combination of struts and straining beams by posts *g, g*.

551. Experiments on the Strength of Frames. Experimental researches on this point have been mostly restricted to those made with models on a comparatively small scale, owing to the expense and difficulty attendant upon experiments on frames having the form and dimensions of those employed in ordinary structures.


Among the most remarkable experiments on a large scale, are those made by order of the French government at Lorient, under the direction of M. Riebell, the superintending engineer of the port, and published in the *Annales Maritimes et Coloniales*, Feb. and Nov., 1837.

The experiments were made by first setting up the frame to be tried, and, after it had settled under the action of its

own weight, suspending from the back of it, by ropes placed at equal intervals apart, equal weights to represent a load uniformly distributed over the back of the frame.

The results contained in the following table are from experiments on a truss (Fig. 107) for the roof of a ship shed. The truss consisted of two rafters and a tie beam, with sus-

Fig. 107.



pension pieces in pairs, and diagonal iron bolts, which were added because it was necessary to scarf the tie beam. The span of the truss was $65\frac{1}{2}$ feet; the rafters had a slope of 1 perpendicular to 4 base. The thickness of the beams, measured horizontally, was about $2\frac{1}{2}$ inches, their depth about 18 inches. The amount of the settling at each rope was ascertained by fixed graduated vertical rods, the measures being taken below a horizontal line marked 0.

WEIGHTS BORNE BY THE TRUSS.	Amount of settling on the right of the ridge below the horizontal 0, in inches.				
	At 18 inches from the ridge.	At 4 ft. 6 in. from the ridge.	At 8 ft. from the ridge.	At 10 ft. from the ridge.	At 15 ft. from the ridge.
Weight uniformly distributed, 1654 lbs.....	0.15	0.15	0.15	0.15	0.15
Do. do. 8680 lbs.....	1.6	1.7	1.9	1.8	1.1
Do. do. 1654 lbs. and 1368 lbs., suspended from the centre of the frame.....	0.4	0.5	0.4	0.3	0.2
8680 lbs., uniformly distributed, and 1368 lbs. from the centre.....	2.0	2.1	2.3	2.1	1.2

The following table gives the results of experiments made on frames of the usual forms of straight and curved timber for roof trusses. The curved pieces were made of two thicknesses, each $3\frac{1}{2}$ inches. The numbers in the fifth column give the ratios between the weight of the frame and that of the weight borne by which the elasticity was not impaired.

DESCRIPTION OF THE FRAMES.	Span, or bearing.	Rise, or versed sine.	Depth of beams.	Horizontal breadth of beams.	Ratio between weight in lbs. of frame, and that of the load borne.	Weight borne without impairing elasticity of the wood.	Weight by which the elasticity was visibly changed.
Frame formed of two rafters and a tie beam..	25 ft.	8 ft.	8.5 in.	3.1 in.	14.30	2300	3916
Do. do. do. and suspension pieces in pairs, (Fig. 108)..	8.88	2770	5520
Frame of a segment arch confined by a tie beam, (Fig. 109).....	54 ft.	11 ft.	12 in.	7 in.	8.85	6520	12240
Do. do. do. with suspension pieces in pairs, (Fig. 110)..	2.82	9500	18077
Frame of a segment arch with rafters confined at their foot by a tie piece, (Fig. 111)..	3.91	6111	21896
Frame of a full centre arch confined by a tie beam	50 ft.	25 ft.	1.00	4336	5161
Do. do. do. with suspension pieces in pairs....	0.91	7338	8153

Fig. 108.

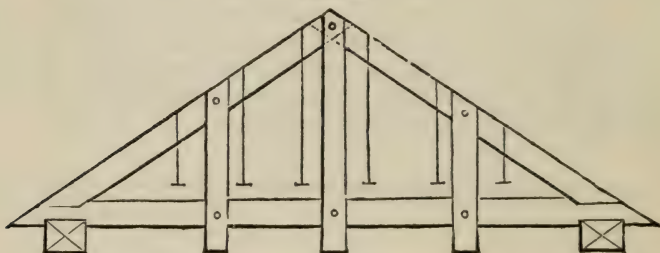


Fig. 109.

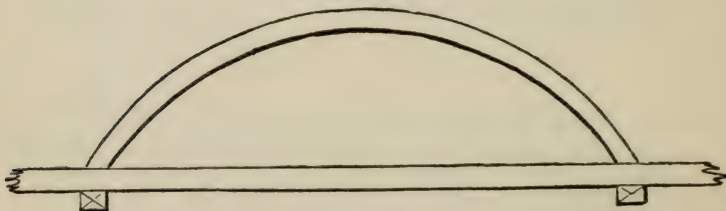


Fig. 110.

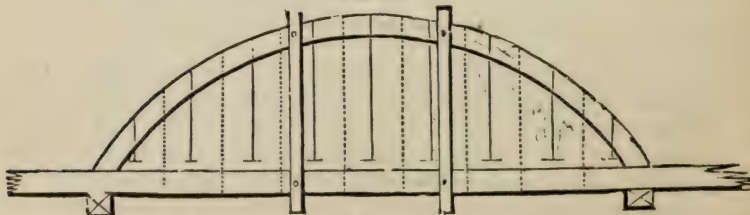


Fig. 111.

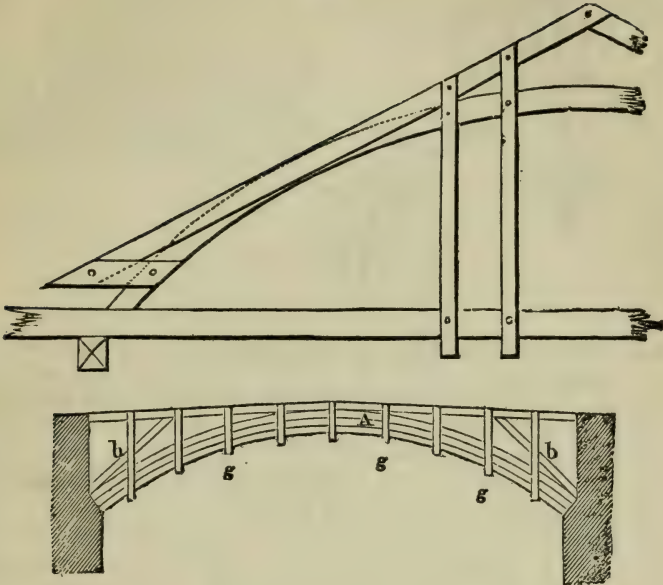


Fig. 112—Represents a wooden arch A formed of a solid built beam of three courses which support the beams c, c by the posts g, g which are formed of pieces in pairs.

b, b, inclined struts to strengthen the arch by relieving it of a part of the load on the beams c, c.

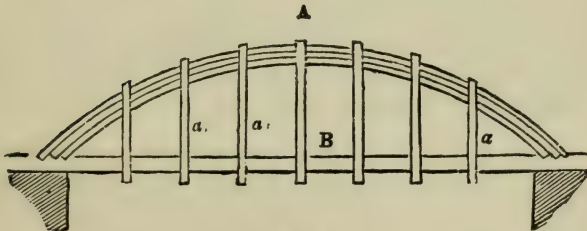


Fig. 113—Represents a wooden arch of a solid built beam A which supports the horizontal beam B by means of the posts a, a. The arch is let into the beam B, which acts as a tie to confine its extremities.

552. Wooden arches may also be formed by fastening together several courses of boards, giving the frame a polygonal form, (Fig. 114,) corresponding to the desired curvature, and then shaping the outer and inner edges of the arch to the proper curve. Each course is formed of boards cut into

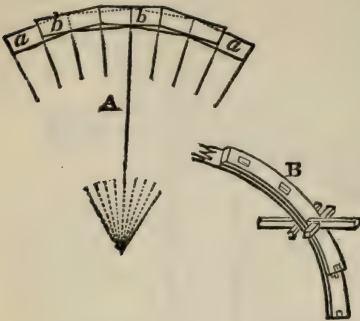


Fig. 114—Represents an elevation A of a wooden arch formed of short pieces *a*, *b* which abut end to end and break joints. B represents a perspective view of this combination, showing the manner in which the parts are keyed together.

sharp lengths, depending on the curvature required; these pieces abut end to end, the joints being in the direction of the radii of curvature, and the pieces composing the different courses break joints with each other. The courses may be connected either by jibs and keys of hard wood, or by iron bolts. This method is very suitable for all light framework where the pressure borne is not great.

Wooden arches are chiefly used for bridges and roofs. They serve as intermediate points of support for the framing on which the roadway rests in the one case, and the roof covering in the other. In bridges the roadway may lie either above the arch, or below it; in either case vertical posts, iron rods, or bridles connect the horizontal beams with the arch.

553. The greatest strain in wooden arches takes place near the springing line; this part should, therefore, when practicable, be relieved of the pressure that it would directly receive from the beams above it by inclined struts, so arranged as to throw this pressure upon the lateral supports of the arch.

The pieces which compose a wooden arch may be bent into any curve. The one, however, usually adopted is an arc of a circle, as the most simple for the mechanical construction of the framing, and presenting all desirable strength.

CHAPTER V.

BRIDGES.

- I. CLASSIFICATION. II. STONE BRIDGES. III. WOODEN BRIDGES. IV. CAST-IRON BRIDGES. V. WROUGHT-IRON TRUSS BRIDGES. VI. TUBULAR BRIDGES. VII. SUSPENSION BRIDGES. VIII. SWING BRIDGES. IX. AQUEDUCT BRIDGES.

I.

CLASSIFICATION.

554. A *bridge* is a structure for supporting a roadway over a body or stream of water, or over a depression in the earth.

If the structure is over a depression in which there is usually no water, it is called a *viaduct*.

If the structure supports a water-way, it is called an *aqueduct*, and if the aqueduct is over a river, it is sometimes called an *aqueduct-bridge*.

Bridges may be classed according to their mechanical features; in which case we have—

1. Arches.
2. Trussed bridges.
3. Tubular bridges.
4. Suspension bridges.

They may also be classed according to the materials which compose them; as Stone, Wood, and Iron.

The former is more convenient for the purposes of analysis, but the latter will be used in this work.

II.

STONE BRIDGES.

555. A stone bridge consists of a roadway which rests upon one or more arches, usually of a cylindrical form, the abutments and piers of the arches being of sufficient height and strength to secure them and the roadway from the effects of an extraordinary rise in the water-course.

556. The general location of a bridge will depend upon the approaches, and the particular locality may be modified by the character of the banks, the soil or subsoil, and the bends in the stream. High embankments and deep excavations will naturally be avoided, if possible. The faces of the piers and abutments should be nearly or quite parallel to the thread of the stream.

557. Survey. With whatever considerations the locality may have been selected, a careful survey must be made not only of it, but also of the water-course and its environs for some distance above and below the point which the bridge will occupy, to enable the engineer to judge of the probable effects which the bridge, when erected, may have upon the natural regimen of the water-course.

The object of the survey will be to ascertain thoroughly the natural features of the surface, the nature of the subsoil of the bed and banks of the water-course, and the character of the water-course at its different phases of high and low water, and of freshets. This information will be embodied in a topographical map; in cross and longitudinal sections of the water-course and the substrata of its bed and banks, as ascertained by soundings and borings; and in a descriptive memoir which, besides the usual state of the water-course, should exhibit an account of its changes, occasioned either by permanent or by accidental causes, as from the effects of extraordinary freshets, or from the construction of bridges, dams, and other artificial changes either in the bed or banks.

558. Water-way. When the natural water-way of a river is obstructed by any artificial means, the contraction, if considerable, will cause the water, above the point where the obstruction is placed, to rise higher than the level of that below it, and produce a fall, with an increased velocity due to it, in the current between the two levels. These causes, during heavy freshets, may be productive of serious injury to agriculture, from the overflowing of the banks of the water-course;—may endanger if not entirely suspend navigation, during the seasons of freshets;—and expose any structure which, like a bridge, forms the obstruction, to ruin, from the increased action of the current upon the soil around its foundations. If, on the contrary, the natural water-way is enlarged at the point where the structure is placed, with the view of preventing these consequences, the velocity of the current, during the ordinary stages of the water, will be decreased, and this will occasion deposits to be formed at the point, which, by gradually filling up the bed, might, on a

sudden rise of the water, prove a more serious obstruction than the structure itself; particularly if the main body of the water should happen to be diverted by the deposit from its ordinary channels, and form new ones of greater depth around the foundations of the structure.

The water-way left by the structure should, for the reasons above, be so regulated that no considerable change shall be occasioned in the velocity of the current through it during the most unfavorable stages of the water.

559. For the purpose of deciding upon the most suitable velocity for the current through the contracted water-way formed by the structure, the velocity of the current and its effects upon the soil of the banks and bed of the natural water-way should be carefully noted at those seasons when the water is highest; selecting, in preference, for these observations, those points above and below the one which the bridge is to occupy, where the natural water-way is most contracted.

560. The velocity of the current at any point may be ascertained by the simple process of allowing a light ball, or *float* of some material, like white wax, or camphor, whose specific gravity is somewhat less than that of water, to be carried along by the current of the middle thread of the water-course, and noting the time of its passage between two fixed stations.

561. From the velocity at the surface, ascertained in this way, the average, or *mean velocity* of the water, which flows through the cross-section of any water-way between the stations where the observations are taken, is nearly four-fifths of the velocity at the surface.

Having the mean velocity of the natural water-way, that of the artificial water-way will be obtained from the following expression,

$$v = m \frac{S}{s} V,$$

in which s and v represent, respectively, the area and mean velocity of the artificial water-way; S and V , the same data of the natural water-way; and m a constant quantity, which, as determined from various experiments, may be represented by the mixed number 1,097.

With regard to the effect of the increased velocity on the bed, there are no experiments which directly apply to the cases usually met with. The following table is drawn up from experiments made in a confined channel, the bottom and sides of the channel being formed of rough boards:—

Stages of accumulation termed	Velocity of river in feet per second.	Nature of the bottom which just bears such velocities.	Specific gravity of the material.
Ordinary floods....	} 3.2 2.17	Angular stones, the size of a hen's egg..	2.25
		Rounded pebbles one inch in diameter.	2.614
Uniform tenors....	} 1.07 0.62	Gravel of the size of garden beans....	2.545
		Gravel of the size of peas.....	2.545
Gliding.....	} 0.71 0.351	Coarse yellow sand.....	2.36
Dull.....		0.26	Sand, the grains the size of aniseeds... Brown potters' clay.....

562. Bays. As a general rule, there should be an odd number of bays, whenever the width of the water-way is too great to be spanned by a single arch. Local circumstances may require a departure from this rule; but when departed from, it will be at the cost of architectural effect; since no secondary feature can occupy the central point in any architectural composition without impairing the beauty of the structure to the eye; and as the arches are the main features of a stone bridge, the central point ought to be occupied by one of them.

The width of the bays will depend mainly upon the character of the current, the nature of the soil upon which the foundations rest, and the kind of material that can be obtained for the masonry.

For streams with a gentle current, which are not subject to heavy freshets, narrow bays, or those of a medium size may be adopted, because, even a considerable diminution of the natural water-way will not greatly affect the velocity under the bridge, and the foundations therefore will not be liable to be undermined. The difficulty, moreover, of laying the foundations in streams of this character is generally inconsiderable. For streams with a rapid current, and which are, moreover, subject to great freshets, wide bays will be most suitable, in order, by procuring a wide water-way, to diminish the danger to the points of support, in placing as few in the stream as practicable.

563. Classification of Arches. Arches are classed, according to their concave surface, as: *cylindrical, conical, conoidal, warped, annular, groined, cloistered, and domes.*

A *right arch* is one in which the axis is perpendicular to the face; and an *oblique arch* is one in which the axis is not perpendicular to the face.

A *rampant arch* is one in which the axis is not in a horizontal plane.

564. Surfaces of the Arch. The *soffit* is the inner concave surface.

567. Cylindrical Arch. This is the most usual and the simplest form of arch. The soffit consists of a portion of a cylindrical surface. When the section of the cylinder perpendicular to the axis of the arch, termed a *right section*, cuts from the surface a semicircle, the arch is termed a *full centre arch*; when the section is an arc less than a semicircle, it is termed a *segmental arch*; when the section gives a semi-ellipse, it is termed an *elliptical arch*; when the section gives a curve resembling a semi-ellipse, formed of arcs of circles tangent to each other, the arch is termed an *oval*, (Fig. 115, or *basket handle*), and is called a curve of *three*,




Fig. 116—Represents the half of a pointed curve of four centres,
 ab , half span.
 bc , rise,
 m and n , centres of the half curve ac .

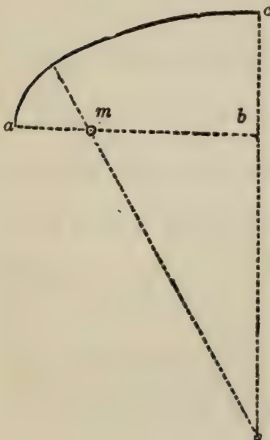


Fig. 117—Represents the half of an obtuse or surbased curve of four centres,
 ab , half span.
 bc , rise.
 m and n , centres of the half curve ac .

five, *seven*, etc., centres. In order to make the curve horizontal at the crown and symmetrical in reference to a vertical line through the centre, there must be an odd number of arcs. When the intrados is composed of two arcs meeting at the highest point of the curve, it is called a *pointed*, (Fig. 116,) or an *obtuse* or *surbased* arch, (Fig. 117.)

568. Oblique Arches. If the obliquity of the arch is small, it may be constructed like the right arch, but when the obliquity is considerable, or in other words when the angle between the axis and face is considerably less or greater than 90 degrees, the pressure upon the voussoirs near the end of the springing lines would be very oblique to the beds, and at the acute angles would tend to force the voussoirs out of place if the coursing joints are made parallel to the axis. To obviate this defect the coursing joints are inclined to the cylindrical elements, as will now be explained.

An ideal mode of determining the coursing joints is to conceive the arch to be intersected by an indefinite number of vertical planes parallel to the face, thus making an indefinite number of curves like the end ones. Then begin at any point, as *d*, Fig. 118, and pass a line along the soffit so as to cut all the former curves at right angles, and we have an ideal coursing joint. The line *d c*, Fig. 118, represents such a line. Other similar curves are also shown. The equation of these when developed is logarithmic. They are all asymptotes to the springing line. The plan of these curves is shown in Fig. 119. A suitable number of vertical intersections may be selected for determining the ring-joints, portions of which only are used, as *b a*, Fig. 118, and *b', a'*, Fig. 119.

Fig. 118.

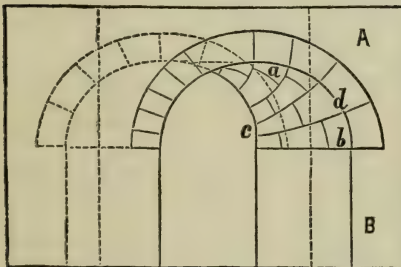


Fig. 118—Elevation of an oblique arch, in which the coursing joints *d c*, etc., are normal to the ring-joints, *b a*, etc.

B is the abutment.

A the filling over the back.

Fig. 119—Plan of the oblique arch shown in Fig. 118, showing the plan of the coursing joint and heading joints.

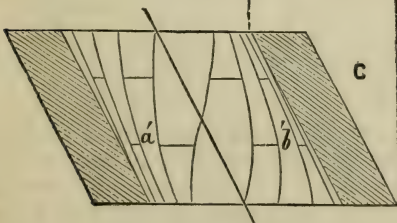


Fig. 119.

This mode of determining the coursing joints is very objectionable in practice, because the voussoirs must constantly vary in width as we pass from one end to the other; and as the bed-surfaces are warped, it makes it exceedingly difficult to make the voussoirs of proper shape.

The method of making the coursing joints nearly or quite parallel to each other, sometimes called the English method, is more simple, and gives as good results as the preceding method.

Fig. 120.

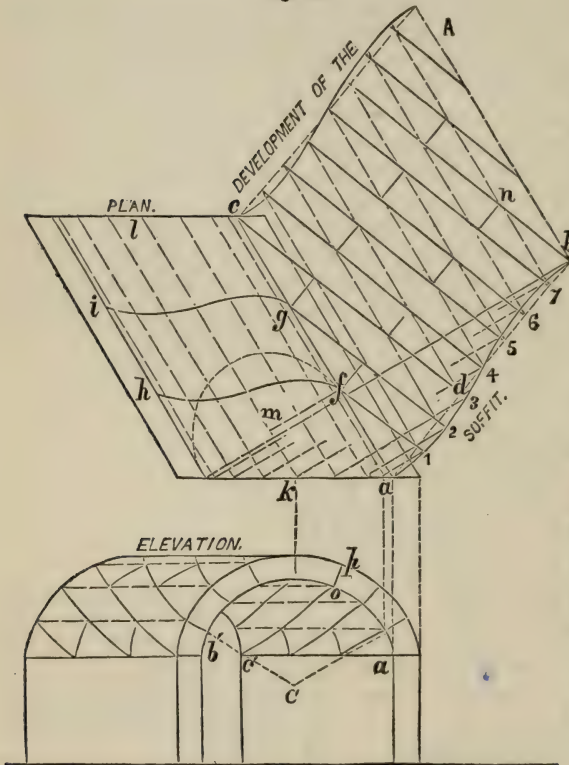


Fig. 120 is the plan of an oblique arch.

kl is the axis, ac the springing line, ak the face; ab and cA the development of the intrados of oblique section. The right section, mf , is the arc of a circle; hg and ig are horizontal projections of heading joints; fn is the development of the joint hfg . $c 2, c 3$, etc., are the developments of coursing joints.

Fig. 121 is the elevation of an oblique arch, of which Fig. 120 is the plan.

$a' o$ is the soffit, ac' is the springing line, $c' o$, spiral coursing joint. C is a point directly below the axis, from which all the joints, as po , in the face radiate.

Fig. 121.

Fig. 121 is the elevation of such an oblique arch, and Fig. 120 is the plan. The system here shown is sometimes called "Buck's System." In order to construct this system graphically, we conceive that the soffit is developed, or rolled out about the springing line ac . Let mf be a right

section (which is here supposed to be circular). Conceive that it is revolved down to coincide with the horizontal plane, and that the circumference is divided into a convenient number of equal parts, and through the points of division conceive that cylindrical elements are drawn, as shown in the plan. In the development the circumference of the semicircle will become the line fb , and the cylindrical elements will be, as shown, parallel to the springing line ac . From the points where the horizontal projections of the cylindrical elements intersect the face ak , draw lines parallel to fb , and note their intersections with the developed position of the cylindrical elements, and the curve adb through these points will be the development of the intrados of oblique section. In a similar way find cA .

Join ab with a straight line, and divide it into as many equal parts as there are to be voussoirs in the face. In the figure there are eight such parts. When there is an even number there will be a joint at the crown, but when an odd number there will be the appearance of a keystone at the crown. From c at the end of the springing-line ac draw a perpendicular cd to the line ab , and if it passes through one of the divisions previously determined on ab , we proceed with the construction; but if it does not, we make such a change in the data as will make it perpendicular. This may be done in several ways. We may erect a perpendicular to ab from the joint which is nearest the foot of the perpendicular previously drawn, and note where it intersects the springing-line, and change the length of the arch so that it will pass through that point. Or we may change the obliquity of the arch, or change the number of divisions of the line ab . If the foot of the perpendicular should fall near a division, the line may be changed so as to pass through the point and leave it slightly out of a perpendicular. We might also disregard the condition that the perpendicular dc should pass through the end of the springing-line ac ; but this is objectionable, because the opposite sides of the arch would then not be alike.

Having fixed the position of cd , we proceed to draw lines through the several points of division of ab , parallel to cd . It should be observed that points through which these parallel lines are drawn are on the straight line adb , and not on the curved line $a1, 2$, etc. The parallel lines thus drawn are the *coursing joints*. The development of the *ring joints* fn , etc., are perpendicular to the developed coursing joints, and hence will be normal to each other in their true position in the

arch; and hence it is evident that the intrados in oblique section ab will not be perpendicular to the coursing joints. And since the projection of the face is a straight line, ak , it is evident that the horizontal projection of a ring joint will be a curved line fh , the position of which may be determined by reversing the process by which $a\ 1\ 2\ b$ was found. The horizontal projection of the coursing joints will also be curved lines.

This construction evidently makes the divisions $a\ 1-12-23$, etc., on the curved line adb , unequal. The space $a\ 1$ on the development is laid off on the arc in the elevation from a . The space $1-2$ is next laid off, and so on. By developing the extrados and determining the points of division on the back of the arch, we may construct the radial lines in the face of the arch. These lines are slightly curved in the arch, but it is found, by constructing the arch on a large scale, that the chords of the arcs op , etc., all pass through a common point C . The coursing joints and ring joints in the elevation are easily determined from the plan.

The bed-surfaces of the voussoirs may be generated by conceiving a radial line to pass through one corner of them (which will be normal to the soffit) and moved along on a coursing joint, keeping it constantly normal to the soffit. This line will generate a true helicoidal surface. The end surfaces of the voussoirs are generated in a similar way by moving a radial line along a ring joint, and hence these surfaces are also helicoidal. The lengths of the end voussoirs, measured on the back of the arch next to the oblique angles, will be shorter than those next to the acute angles, while all those in the body of the arch will be like each other.

Mr. Hart, an English author, proposed a method which differed from the one above explained in the following particulars: The spaces in the curved line adb were made equal to each other; the coursing joints were straight, and passed through the points of division at the opposite ends of the arch in the developed intrados; hence, the coursing joints in this system are not parallel to each other. Another distinction is, the ring joints and end-faces of all the voussoirs are parallel to the end of the arch, and hence the end-faces are plane. This might simplify the construction, but it does not use the material from which the voussoirs are cut as economically as the preceding system. In this system the bed-surfaces are helicoidal, as in the preceding system. The preceding system seems to be thoroughly scientific and quite as easily executed as the latter, or of any other conceivable system in which the

joints are spiral. In practice, *templets* and *bevels* are made, in order to guide the workmen in making the angles and surfaces of the *voussoirs*.

569. Arched Bridges. Cylindrical arches with any of the usual forms of curve of intrados may be used for bridges. The selection will be restricted by the width of the bay, the highest water-level during freshets, the approaches to the bridge, and the architectural effect which may be produced by the structure, as it is more or less exposed to view at the intermediate stages between high and low water.

Oval and segment arches are mostly preferred to the full centre arch, particularly for medium and wide bays, for the reasons that, for the same level of roadway, they afford a more ample water-way under them, and their heads and spandrels offer a smaller surface to the pressure of the water during freshets than the full centre arch under like circumstances.

The level of the springing lines will depend upon the rise of the arches, and the height of their crowns above the water-level of the highest freshets. The crown of the arches should not, as a general rule, be less than three feet above the highest known water-level, in order that a passage-way may be left for floating bodies descending during freshets. Between this, the lowest position of the crown, and any other, the rise should be so chosen that the approaches, on the one hand, may not be unnecessarily raised, nor, on the other, the springing lines be placed so low as to mar the architectural effect of the structure during the ordinary stages of the water.

When the arches are of the same size, the axis of the roadway and the principal architectural lines which run lengthwise along the heads of the bridge, as the top of the parapet, the cornice, etc., etc., will be horizontal, and the bridge, to use a common expression, be on a *dead level* throughout. This has for some time been a favorite feature in bridge architecture, few of the more recent and celebrated bridges being without it, as it is thought to give a character of lightness and boldness to the structure.

570. Centres. Before an arch is constructed a strong support or framework is erected to support the arch until the work is completed. This support is called *the centering of the arch*. It must be made strong, and so as to settle as little as possible while the masonry is being erected; and in arches of long span it must be so erected and supported that it may be removed without causing local or cross strains in the arch. To accomplish this, the centering should be removed from the entire soffit at the same time. It is espe-

cially detrimental to relieve one side whilst the other side is firmly supported.

571. Means used for striking Centres. When the arch is completed the centres are detached from it, or struck. To effect this in large centres an arrangement of wedge blocks is used, termed the *striking-plates*, by means of which the centre may be gradually lowered and separated from the soffit of the arch. This arrangement consists (Fig. 125) in forming steps upon the upper surface of the beam which forms the framed support to receive a wedge-shaped block, on which another beam, having its under surface also arranged with steps, rests. The struts of the rib either abut against the upper surface of the top beam, or else are inserted into cast-iron sockets, termed *shoe-plates*, fastened to this surface. The centre is struck by driving back the wedge block.

572. When the struts rest upon intermediate supports between the abutments, double or *folding* wedges may be placed under the struts, or else upon the back pieces of the ribs under each bolster. The latter arrangement presents the advantage of allowing any part of the centre to be eased from the soffit, instead of detaching the whole at once as in the other methods of striking wedges. This method was employed for the centres of Grosvenor Bridge (Fig. 124), over the river Dee at Chester, and was perfectly successful both in allowing a gradual settling of the arch at various points, and in the operation of striking.

573. A novel application of sand to the striking of centres has lately been made with success. Vessels containing the sand are placed on the supports for the centres, and are so arranged near the bottom that the sand can be allowed to run out slowly when the time comes for striking. The centres are placed on these vessels and keyed up in the usual way. To lower them, the sand is allowed to run out and let the centres gradually down. This method has the advantage of steadiness of lowering each rib of the centre, and of not allowing one to come down more rapidly than the others. After the sand has all run out, the centres can be taken down in the ordinary manner.

574. For small light arches (Fig. 122) the ribs may be formed of two or more thicknesses of short boards, firmly nailed together; the boards in each course abutting end to end by a joint in the direction of the radius of curvature of the arch, and breaking joints with those of the other course. The ribs are shaped to the form of the intrados of the arch,

to receive the bolsters, which are of battens cut to suitable lengths and nailed to the ribs.

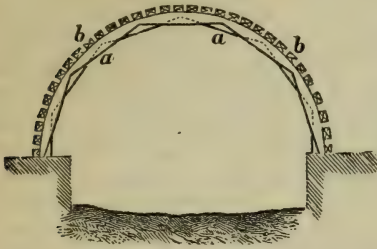


Fig. 122—Represents the rib of a centre for light arches.
a, a, rib formed of planks.
b, b, bolster pieces which receive the masonry.

575. For heavy arches with wide spans, when firm intermediate points of support can be procured between the abutments, the back pieces (Fig. 123) may be supported by shores

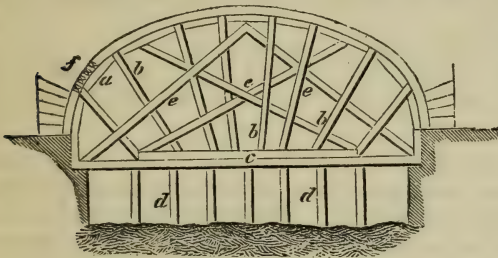


Fig. 123—Represents the rib of a centre with intermediate points of support.
a, back pieces of the rib which receive the bolsters *f*.
b, b, struts which support the back pieces.
e, e, braces.
c, solid beam resting on the intermediate supports *d, d*, which receive the ends of the struts *b, b*.

placed under the blocks in the direction of the radii of curvature of the arch, or of inclined struts (Fig. 124) resting on the points of support. The shores, or struts, are prevented from bending by braces suitably placed for the purpose.

If intermediate points of support cannot be obtained, a broad framed support must be made at each abutment to receive the extremities of the struts that sustain the back pieces. The framed support (Fig. 125) consists of a heavy beam laid either horizontally or inclined, and is placed at that joint of the arch (the one which makes an angle of about 30° with the horizon) where the voussoirs, if unsupported beneath, would slide on their beds. This beam is borne by shores, which find firm points of support on the foundations of the abutment.

The back pieces of the centre (Fig. 125) may be supported by inclined struts, which rest immediately upon the framed support, one of the two struts under each block resting upon one of the framed supports, the other on the one on the oppo-

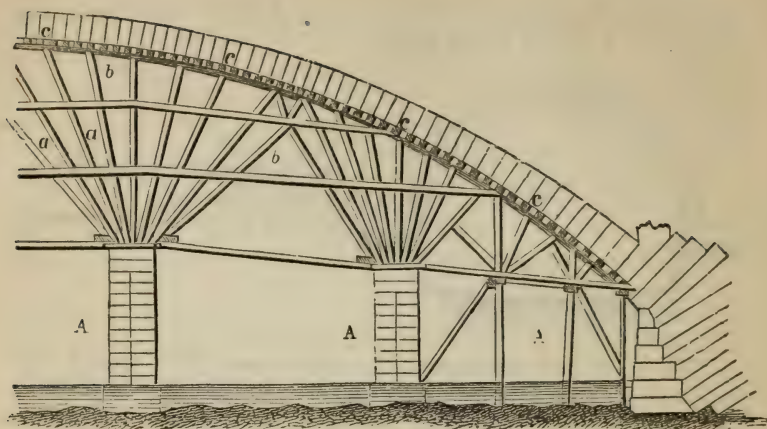


Fig. 124—Represents a part of the rib of Grosvenor Bridge over the Dee at Chester. Span 200 feet.

A, A, intermediate points of support.

a, a, a, struts resting upon cast-iron sockets on the supports A.

b, b, two courses of plank each $4\frac{1}{2}$ inches thick bent over the struts a, a, to the form of the arch, the courses breaking joints.

c, c, folding wedges laid upon the back pieces b of each rib to receive the bolsters on which the voussoirs are laid.

site side, the two struts being so placed as to make equal angles with the radius of curvature of the arch drawn through the middle point of the block. Bridle pieces, placed in the direction of the radius of curvature, embrace the blocks and struts in the usual manner, and prevent the latter from sagging. This combination presents a figure of invariable form, as the strain at any one point is received by the struts and transmitted directly to the fixed points of support. It has the disadvantage of requiring beams of great length when the span of the arch is considerable, and of presenting frequent crossing of the struts where notches will be requisite, and the strength of the beams thereby diminished.

The centre of Waterloo Bridge, over the Thames (Fig. 125), was framed on this principle. To avoid the inconveniences resulting from the crossing of the struts, and of building beams of sufficient length where the struts could not be procured from a single beam, the device was adopted of receiving the ends of several struts at the points of crossing into a large cast-iron socket suspended by a bridle piece.

576. When the preceding combination cannot be employed, a strong truss (Fig. 126), consisting of two inclined struts, resting upon the framed supports, and abutting at top against a straining beam, may be formed to receive the ends of some

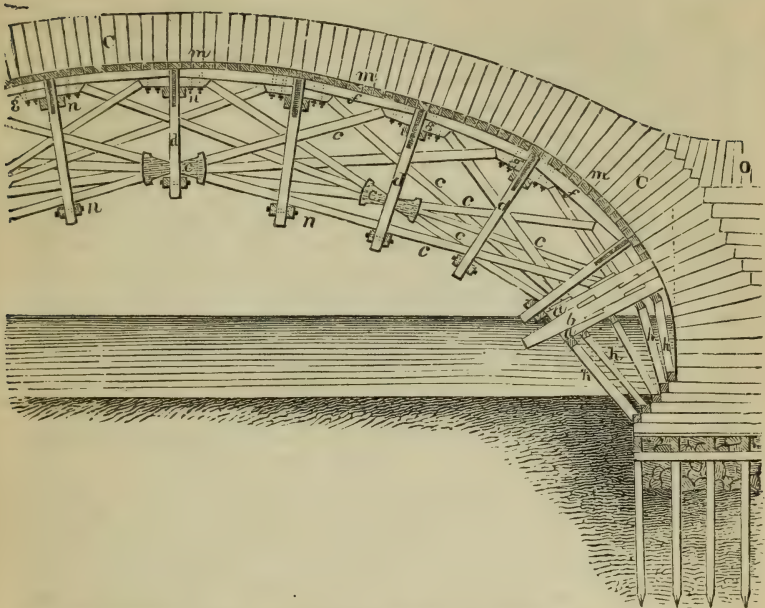


Fig. 125—Represents a part of a rib of Waterloo Bridge over the Thames.

a, a, b, three heavy beams, forming the *striking plates*, which with the shores *h, h*, form the framed support for the struts of the centre.

c, c, struts abutting against the blocks *g, g* placed under the joints of the back pieces *f, f*.

d, d, bridle or radial pieces in pairs which are confined at top and bottom between the horizontal ties *n, n* of the ribs, also in pairs.

e, c, cast-iron sockets.

m, m, bolsters of the centre resting on the back pieces *f*.

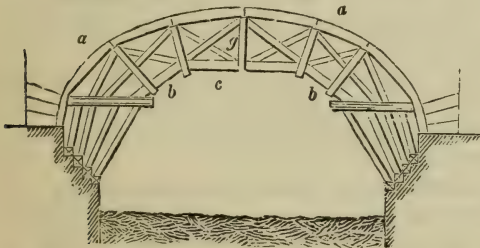


Fig. 126—Represents a frame for a rib in which the two inclined struts *b, b* and the straining beams *c* form intermediate supports for some of the struts that support the back pieces *a, a*. *e* and *d* are the framed extreme supports

of the struts which support the back pieces. This combination, and all of a like character, require that the arch should not be constructed more rapidly on one side of the centre than on the other, as any inequality of strain on the two halves of the centre would have a tendency to change the shape of the frame, thrusting it in the direction of the greater strain.

577. Style of Architecture. The design and construction of a bridge should be governed by the same general principles as any other architectural composition. As the object of a bridge is to bear heavy loads, and to withstand the effects of one of the most destructive agents with which the engineer has to contend, the general character of its architecture should be that of strength. It should not only be secure, but to the apprehension appear so. It should be equally removed from Egyptian massiveness and Corinthian lightness; while, at the same time, it should conform to the features of the surrounding locality, being more ornate and carefully wrought in its minor details in a city, and near buildings of a sumptuous style, than in more obscure quarters; and assuming every shade of conformity, from that which would be in keeping with the humblest hamlet and tamest landscape to the boldest features presented by Nature and Art. Simplicity and strength are its natural characteristics; all ornament of detail being rejected which is not of obvious utility, and suitable to the point of view from which it must be seen; as well as all attempts at boldness of general design which might give rise to a feeling of insecurity, however unfounded in reality. The heads of the bridge, the cornice, and the parapet should generally present an unbroken outline; this, however, may be departed from in bridges where it is desirable to place recesses for seats, so as not to interfere with the footpaths; in which case a plain buttress may be built above each starting to support the recess and its seats, the utility of which will be obvious, while it will give an appearance of additional strength when the height of the parapet above the startings is at all considerable.

578. Construction. The methods of laying the foundations of structures of stone, &c., described under the article of Masonry, are alike applicable to all structures which come under this denomination.

579. Various expedients have been tried to secure the bed of the natural water-way around and between the piers; among the most simple and efficacious of which is that of covering the surface to be protected by a bed of stone broken into fragments of sufficient bulk to resist the velocity of the current in the bays, if the soil is of an ordinary clayey mud; but, if it be of loose sand or gravel, the surface should be first covered by a bed of tenacious clay before the stone be thrown in. The voids between the blocks of stone, in time, become filled with a deposit of mud, which, acting as a cement, gives to the mass a character of great durability.

580. The foundation courses of the piers should be formed of heavy blocks of cut stone bonded in the most careful manner, and carried up in offsets. The faces of the piers should be of cut stone well bonded. They may be built either vertically, or with a slight batter. Their thickness at the impost should be greater than what would be deemed sufficient under ordinary circumstances; as they are exposed to the destructive action of the current, and of shocks from heavy floating bodies; and from the loss of weight of the parts immersed, owing to the buoyant effort of the water, their resistance is decreased. The most successful bridge architects have adopted the practice of making the thickness of the piers at the impost between one sixth and one eighth of the span of the arch. The thickness of the piers of the bridge of Neuilly, near Paris, built by the celebrated Perronet, whose works form an epoch in modern bridge architecture, is only one ninth of the span, its arches also being remarkable for the boldness of their curve.

581. The usual practice is to give to all the piers the same proportional thickness. It has, however, been recommended by some engineers to give sufficient thickness to a few of the piers to resist the horizontal thrust of the arches on either side of them, and thus secure a part of the structure from ruin, should an accident happen to any of the other piers. These masses, to which the name *abutment piers* has been applied, would be objectionable from the diminution of the natural water-way that would be caused by their bulk, and from the additional cost for their construction, besides impairing the architectural effect of the structure. They present the advantage, in addition to their main object, of permitting the bridge to be constructed by sections, and thus procure an economy in the cost of the wooden centres for the arches.

582. The projection of the starlings beyond the heads of the bridge, their form, and the height given to them above the springing lines, will depend upon local circumstances. As the main objects of the starlings are to form a *fender* or *guard* to secure the masonry of the spandrels, &c., from being damaged by floating bodies, and to serve as a cut-water to turn the current aside, and prevent the formation of whirls, and their action on the bed around the foundations, the form given to them should subserve both these purposes. Of the different forms of horizontal section which have been given to starlings (Figs. 127, 128, 129, 130), the semi-ellipse, from experiments carefully made, with these ends in view, appears best to satisfy both objects.




Fig. 127.




Fig. 128.




Fig. 129.




Fig. 130.

Figs. 127, 128, and 129—Represent horizontal sections of starlings A of the more usual forms, and part of the pier B above the foundation courses. Fig. 130 represents the plan of the hood of a starling laid in courses, the general shape being that of the quarter of a sphere.

The up and down stream starlings, in tidal rivers not subject to freshets and ice, usually receive the same projections, which, when their plan is a semi-ellipse, must be somewhat greater than the semi-width of the pier. Their general vertical outline is columnar, being either straight or swelled (Figs. 131, 132, 133, 134). They should be built as high as the ordi-

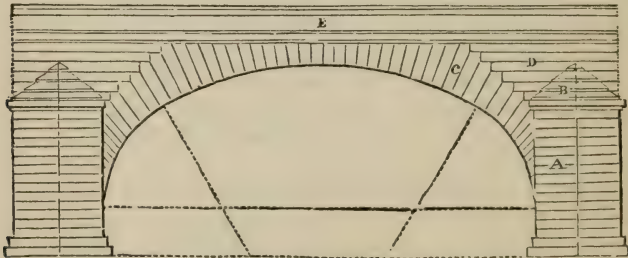


Fig. 131—Represents in elevation starlings A, their hoods B, the voussoirs C, the spandrels D, and the combination of their courses and joints with each other in an oval arch of three centres. E, parapet; F, cornice.

nary highest water-level. They are finished at top with a coping stone to preserve the masonry from the action of rain, &c.: this stone, termed the *hood*, may receive a conical, a spheroidal, or any other shape which will subserve the object in view, and produce a pleasing architectural effect, in keeping with the locality.

In streams subject to freshets and ice, the up-stream starlings should receive a greater projection than those down stream, and, moreover, be built in the form of an inclined plane (Fig. 135) to facilitate the breaking of the ice, and its passage through the arches.



Fig. 135—Represents a side elevation and plan N of a pier of the Potomac aqueduct, arranged with an ice-breaker starling.

A, up-stream starling, with the inclined ice-breaker D, which rises from the low-water level above that of the highest freshets.

B, down-stream starling.

C, face of pier.

E, top of pier.

F, horizontal projection of top of ice breaker.

GG, horizontal projection of faces of pier and starlings.

583. Where the banks of a water-course spanned by a bridge are so steep and difficult of access that the roadway must be raised to the same level with their crests, security for the foundation, and economy in the construction demand that *hollow* or *open piers* be used instead of a solid mass of masonry. A construction of this kind requires great precaution. The facing courses of the piers must be of heavy blocks dressed with extreme accuracy. The starlings must be built solid. The faces must be connected by one or more cross tie-walls of heavy, well-bonded blocks; the tie-walls being connected from distance to distance vertically by strong tie-blocks; or, if the width of the pier be considerable, by a tie-wall along its centre line.

584. The foundations, the dimensions, and the form of the abutments of a bridge will be regulated upon the same principles as the like parts of other arched structures; a judicious conformity to the character of strength demanded by the

structure, and to the requirements of the locality, being observed. The walls which at the extremities of the bridge form the continuation of the heads, and sustain the embankments of the approaches,—and which, from their widening out from the general line of the heads, so as to form a gradual contraction of the avenue by which the bridge is approached, are termed the *wing-walls*,—serve as firm buttresses to the abutments. In some cases the back of the abutment is terminated by a cylindrical arch (Fig. 136) placed on end, or having its right-line elements vertical, which connects the

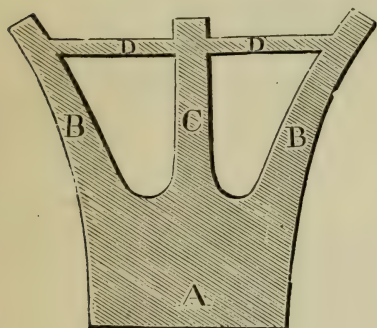


Fig. 136—Represents a horizontal section of an abutment A, with curved wing-walls B, B, connected with a central buttress C, and a cross tie-wall D.

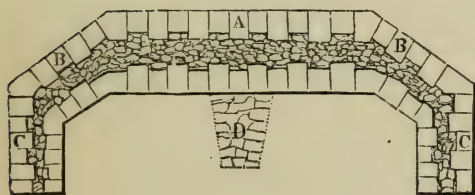


Fig. 137—Represents a horizontal section of an abutment A, with straight wing-walls B, B, terminated by return-walls C, C, D, central buttress.

two wing-walls. In others (Fig. 137) a rectangular-shaped buttress is built back from the centre line of the abutment, and is connected with the wing-walls either by horizontal arches, or by a vertical cross tie-wall.

585. The wing-walls may be either plane surface walls (Fig. 138) arranged to make a given angle with the heads of the bridge, or they may be curved surface-walls presenting their concavity (Fig. 145) or their convexity to the exterior; or of any other shape, whether presenting a continuous or a broken surface, that the locality may demand.

586. The arches of bridges demand great care in propor-

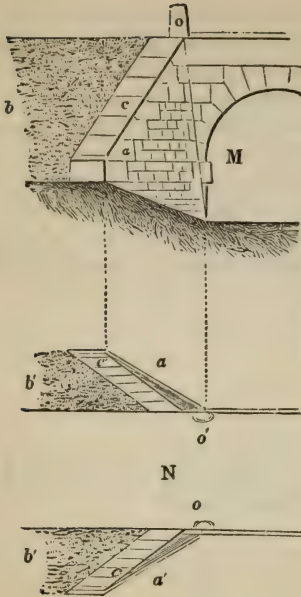


Fig. 138—Represents an elevation M and plan N of a portion of a single arch bridge with straight wing-walls sustaining an embankment across the valley of the water-course.

a, a', face of wing-wall.
b, b', side slope of embankment.
c, c', top of wing-wall.
o, o', fender or guard stones.

tioning the dimensions of the voussoirs, and procuring accuracy in their forms, as the strength of the structure, and the permanence of its figure, will chiefly depend upon the attention bestowed on these points. Peculiar care should be given in arranging the masonry above the piers which lies between the two adjacent arches. In some of the more recent bridges, (Fig. 139,) this part is built up solid but a short distance above the imposts, generally not higher than a fourth of the rise, and is finished with a reversed arch to give greater security against the effects of the pressure thrown upon it.

The backs of the arches should be covered with a watertight capping of beton, and a coating of asphaltum.

587. The entire spandrel courses of the heads are usually not laid until the arches have been uncentred, and have settled, in order that the joints of these courses may not be subject to any other cause of displacement than what may arise from the effects of variations of temperature upon the arches. The thickness of the head-walls will depend upon the method adopted for supporting the roadway. If this be by a filling of earth between the head-walls, then their thickness must be calculated not only to resist the pressure of the earth which they sustain, but allowance must also be made for the

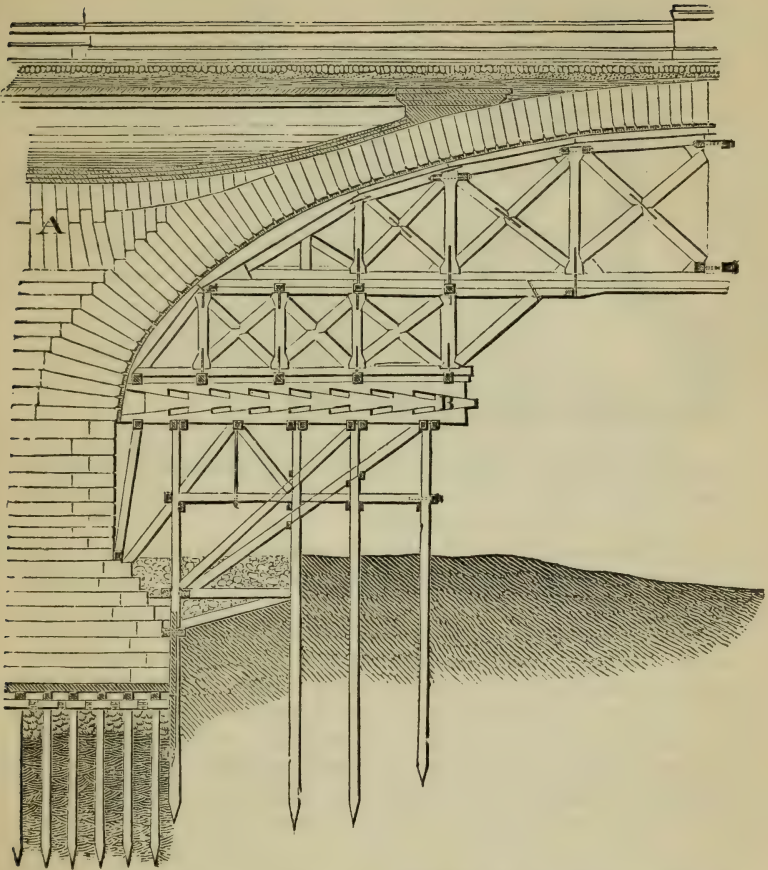


Fig. 139—Represents a longitudinal section of a portion of a pier and foundations, and of an arch and its centre of the new London bridge over the Thames.

A, finish of solid spandrel with reversed arch.

B, wedge of striking plates.

C, recess over the starlings for seats.

effects of the shocks of floating bodies in weakening the bond, and separating the blocks from their mortar-bed. The more approved methods of supporting the roadway, except for very flat segment arches, are to lay the road materials either upon broad flagging stones (Figs. 139, 140,) which rest upon thin brick walls built parallel to the head-walls, and supported by the piers and arches; or by small arches, (Fig. 141) for which these walls serve as piers; or by a system of small groined arches supported by pillars resting upon the piers

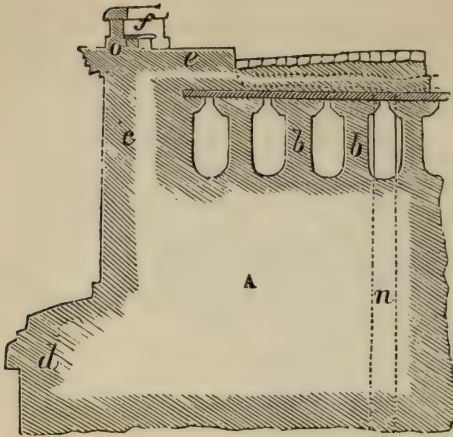


Fig. 140—Represents a profile of Fig. 139 through the centre of the pier, showing the arrangement of the roadway and its drainage, &c.

A, section of masonry of pier and spandrel.

b, b, sections of walls parallel to head-wall, which support the flagging stone on which the roadway is laid.

c, section of head-wall and buttress above the starting d.

e, footpath.

f, recess for seats over the buttress.

o, cornice and parapet.

n, vertical conduit in the pier communicating with two others under the roadway from the side channels.

and main arches. When either of these methods is used, the head-walls may receive a mean thickness of one fifth of their height above the solid spandrel.

588. Superstructure. The superstructure of a bridge consists of a cornice, the roadway and footpaths, &c., and a parapet.

The object of the cornice is to shelter the face of the head-walls from rain. To subserve this purpose, its projection beyond the surface to be sheltered should be the greater as the altitude of the sheltered part is the more considerable. This rule will require a cornice with supporting blocks, (Fig. 142,) termed *modillions*, below it, whenever the projecting part would be actually, or might seem, insecure from its weight. The height of the cornice, including its supports, should generally be equal to its projections; this will often require more or less of detail in the profile of the cornice, in order that it may not appear heavy. The top surface of the cornice should be a little above that of the footpath, or roadway, and be slightly sloped outward; the bottom should be arranged with a suitable *larmier*, or *drip*, to prevent the water from finding a passage along its under surface to the face of the wall.

589. The parapet surmounts the cornice, and should be high enough to secure vehicles and foot-passengers from accidents, without however intercepting the view from the bridge. The parapet is usually a plain low wall of cut stone, surmounted by a coping slightly rounded on its top surface. In bridges which have a character of lightness, like those with flat segment arches, the parapet may consist of alternate panels of

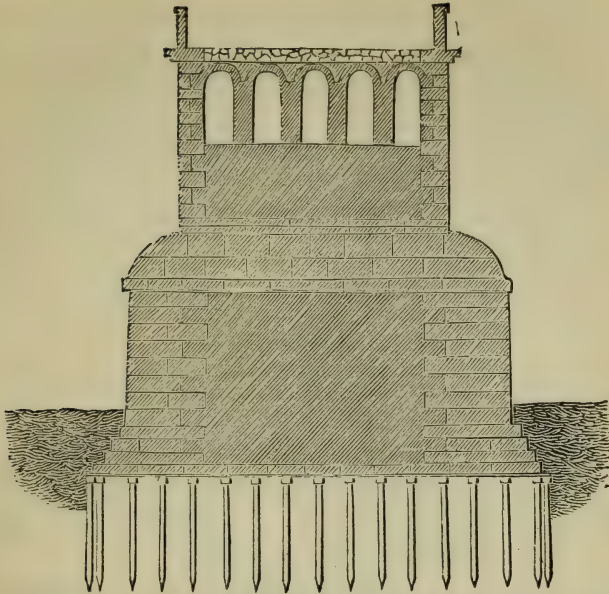


Fig. 141—Represents a section through the axis of a pier of bridge built of stone with brick filling, showing the arrangement for supporting the roadway on small arches,




Fig. 142—Represents a section through the crown of an arch, showing the cornice *a*, modillion *b*, parapet *c*, and footpath *a*.

A, key-stones.
B, side elevation of soffit.

plain wall and balustrades, provided this arrangement be otherwise in keeping with the locality. The exterior face of the parapet should not project beyond that of the heads. The blocks of which it is formed, and particularly those of the coping, should be firmly secured with copper or iron cramps.

590. Strong and durable stone, dressed with the chisel, or hammer, should alone be used for the masonry of bridges where the span of the arch exceeds fifty feet. The interior of

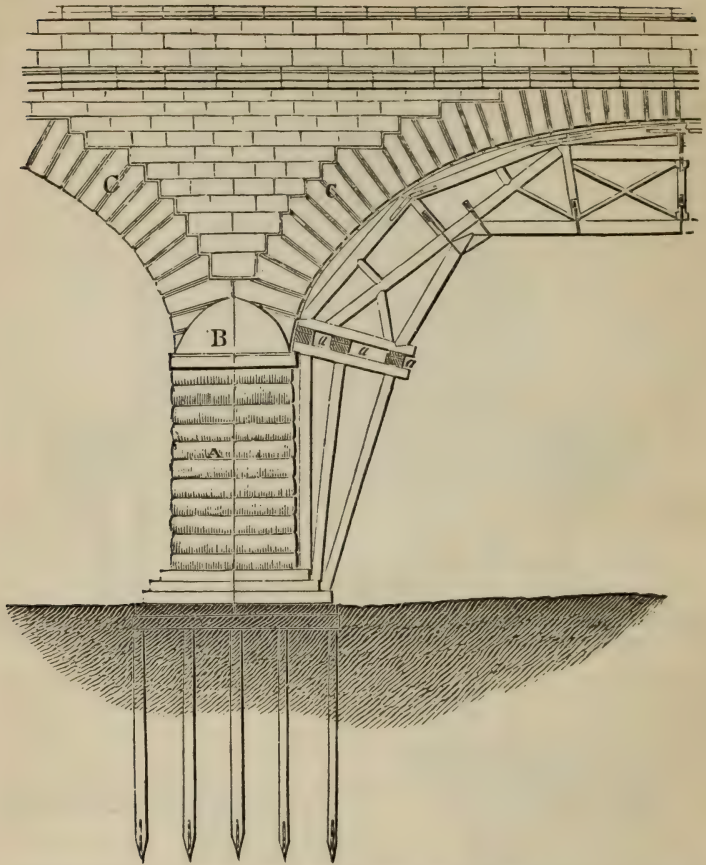


Fig. 143—Represents an elevation of a pier, a portion of two arches, and the centre of the bridge of which Fig. 141 is the section.

A, face of starling.

B, hood.

C, voussoirs with chamfered joints.

the piers, and the backing of the abutments and head-walls, may, for economy, be of good rubble, provided great attention be bestowed upon the bond and workmanship. For medium and small spans a mixed masonry of dressed stone and rubble, or brick, may be used; and, in some cases, brick alone. In all these cases (Figs. 141, 143) the starlings,—the foundation courses,—the impost stone,—the ring courses, at least of the heads,—and the key-stone, should be of good dressed stone. The remainder may be of coursed rubble, or of the best brick,

for the facing, with good rubble or brick for the fillings and backings. In a mixed masonry of this character the courses of dressed stone may project slightly beyond the surfaces of the rest of the structure. The architectural effect of this arrangement is in some degree pleasing, particularly when the joints are chamfered; and the method is obviously useful in structures of this kind, as protection is afforded by it to the surfaces which, from the nature of the material, or the character of the work, offer the least resistance to the destructive action of floating bodies. Hydraulic mortar should alone be used in every part of the masonry of bridges.

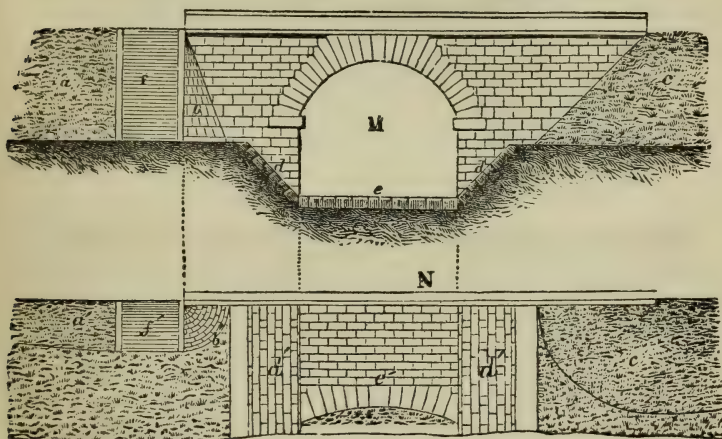


Fig. 144—Elevation M and plan N, showing the manner of arranging the embankments of the approaches, when the head-walls of the bridge are simply prolonged.

a, a', side slope of embankment,

b, b', dry stone facing of the embankment where its end is rounded off, forming a quarter of a cone finish.

f, f', flight of steps for foot-passengers to ascend the embankment.

c, c', embankment arranged as above, but simply sodded.

d, d', facing of dry stone for the side slopes of the banks.

e, e', facing of the bottom of the stream.

591. Approaches. The approaches should be so made as to procure an easy and safe access to the bridge, and not obstruct unnecessarily other channels of communication.

When several avenues meet at a bridge, or where the width of the roadway of a direct avenue is greater than that of the bridge, the approaches are made by gradually widening the outlet from the bridge, until it attains the requisite width, by means of wing-walls of any of the usual forms that may

suit the locality. The form of wing-wall (Fig. 145) presenting a concave surface outward is usually preferred when suited to the locality, both for its architectural effect and its strength. When made of dressed stone it is of more difficult construction and more expensive than the plane surface wall.

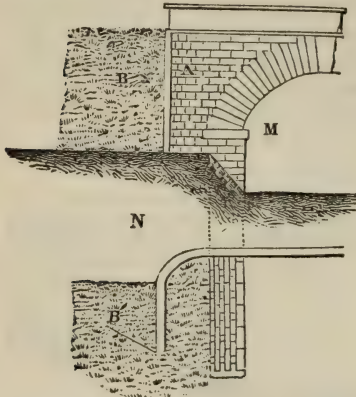


Fig. 145—Represents an elevation M and plan N of a curved face wing-wall.
A, front view of wing-wall.
B, B', slope of embankment.

592. Water-wings. To secure the natural banks near the bridge, and the foundations of the abutments from the action of the current, a facing of dry stone or of masonry should be laid upon the slope of the banks, which should be properly prepared to receive it, and the foot of the facing must be secured by a mass of loose stone blocks spread over the bed around it, in addition to which a line of square-jointed piles may be previously driven along the foot. When the face of the abutment projects beyond the natural banks, an embankment faced with stone should be formed, connecting the face with points on the natural banks above and below the bridge. By this arrangement, termed the *water-wings*, the natural water-way will be gradually contracted to conform to that left by the bridge.

593. Enlargement of Water-way. In the full centre and oval arches, when the springing lines are placed low, the spandrels present a considerable surface and obstruction to the current during the higher stages of the water. This not only endangers the safety of the bridge, by the accumulation of drift-wood and ice which it occasions, but, during these epochs, gives a heavy appearance to the structure. To remedy these defects the solid angle, formed by the heads and the soffit of the arch, may be truncated, the base of the cuneiform-shaped mass taken away being near the springing lines

of the arch, and its apex near the crown. The form of the detached mass may be variously arranged. In the bridge of Neuilly, which is one of the first where this expedient was resorted to, the surface, marked F, (Figs. 133, 134) left by detaching the mass in question, is warped, and lies between two plane curves, the one an arc of a circle *no*, traced on the head of the bridge, the other an oval, *m o o p*, traced on the soffit of the arch. This affords a funnel-shaped water-way to each arch, and, during high water, gives a light appearance to the structure, as the voussoirs of the head ring-course have then the appearance of belonging to a flat segmental arch.

594. General Remarks. The architecture of stone bridges has, within a somewhat recent period, been carried to a very high degree of perfection, both in design and in mechanical execution. France, in this respect, has given an example to the world, and has found worthy rivals in the rest of Europe, and particularly in Great Britain. Her territory is dotted over with innumerable fine monuments of this character, which attest her solicitude as well for the public welfare as for the advancement of the industrial and liberal arts. For her progress in this branch of architecture, France is mainly indebted to her School and her Corps of *Ponts et Chaussées*; institutions which, from the time of her celebrated engineer Perronet, have supplied her with a long line of names, alike eminent in the sciences and arts which pertain to the profession of the engineer.

England, although on some points of mechanical skill pertaining to the engineer's art the superior of France, holds the second rank to her in the *science* of her engineers. Without establishments for professional training corresponding to those of France, the English engineers, as a body, have, until within a few years, labored under the disadvantage of having none of those institutions which, by creating a common bond of union, serve not only to diffuse science throughout the whole body, but to raise merit to its proper level, and frown down alike, through an enlightened *esprit de corps*, the assumptions of ignorant pretension, and the malevolence of petty jealousies.

Among the works of this class, in this country, may be cited the railroad bridge, called the *Thomas Viaduct*, over the Patapsco, on the line of the Baltimore and Washington railroad, designed and built by Mr. B. H. Latrobe, the engineer of the road. This is one of the few existing bridge structures with a curved axis. The engineer has very happily met the double difficulty before him, of being obliged

to adopt a curved axis, and of the want of workmen sufficiently conversant with the application of working drawings of a rather complicated character, by placing full centre cylindrical arches upon piers with a trapezoidal horizontal section. This structure, with the exception of some minor details in rather questionable taste, as the slight iron parapet railing, for example, presents an imposing aspect, and does great credit to the intelligence and skill of the engineer at the time of its construction, but recently launched in a new career. The fine single arch, known as the *Carrolton Viaduct*, on the Baltimore and Ohio railroad, is also highly creditable to the science and skill of the engineer and mechanics under whom it was raised. One of the largest bridges in the United States, designed and partly executed in stone, is the *Potomac Aqueduct* at Georgetown, where the Chesapeake and Ohio canal intersects the Potomac river. This work, to which a wooden superstructure has been made, was built under the superintendence of Captain Turnbull of the U. S. Topographical Engineers.

595. The following table contains a summary of the principal details of some of the more noted stone bridges of Europe:

NAME OF BRIDGE.	River.	Form of Arch.	Number of arches.	Span of widest span.	Rise.	Depth of key-stone.	Width between the heads.	Date.	Name of Engineer.
Vieille-Brionde	Allier.	Segment.	1	178	69	5.3	..	1454	Grenier & Estone.
Rialto	"	1	98.6	23	1578	Michel Angelo.
Claix	Drac.	"	1	150	54	3.1	..	1611
Neuilly	Seine.	Elliptical.	5	127.9	31.9	5.3	47.9	1774	Perronet.
Lavaur	Agout.	"	1	160.5	65	10.9	..	1775	Saget.
Saint-Maxence	Oise.	Segment.	3	76.7	6	5	41.5	1784	Perronet.
Gignac	Erault.	Elliptical.	1	160	44	6.5	..	1793	Garipuy.
Jena	Seine.	Segment.	5	91.8	10.8	4.6	43.7	1811	Lamandé.
Rouen	Seine.	"	5	101.7	13.7	4.6	49.2	1813	Lamandé.
Waterloo	Thames.	Elliptical.	9	120	35	4.9	45	1816	Rennie.
Gloucester	Severn.	"	1	150	54	4.5	35	1827	Telford.
London	Thames.	"	5	152	37.8	5	56	1831	Rennie.
Turin	Dora Riparia.	Segment.	1	147.6	18	4.9	40	..	Mosca.
Grosvenor	Dee.	"	1	200	42	4	..	1833	Hartley.

596. Among the recent French bridges, presenting some interesting features in their construction, may be cited that of *Souillac* over the Dordogne. The river at this place having a torrent-like character, and the bed being of lime-stone rock with a very uneven surface, and occasional deep fissures filled with sand and gravel, the obstacle to using either the caisson, or the ordinary coffer-dam for the foundations, was very great. The engineer, M. Vicat, so well known by his

researches upon mortar, etc., devised, to obviate these difficulties, the plan of enclosing the area of each pier by a coffer-work accurately fitted to the surface of the bed, and of filling this with beton to form a bed for the foundation courses. This he effected, by first forming a framework of heavy timber, so arranged that thick sheeting-piles could be driven close to the bottom, between its horizontal pieces, and form a well-jointed vessel to contain the semi-fluid material for the bed. After this coffer-work was placed, the loose sand and gravel was scooped from the bottom, the asperities of the surface levelled, and the fissures were voided, and refilled with fragments of a soft stone, which it was found could be more compactly settled, by ramming, in the fissures, than a looser and rounder material like gravel. On this prepared surface, the bed of beton, which was from 12 to 15 feet in thickness, was gradually raised, by successive layers, to within a few feet of the low-water level, and the stone superstructure then laid upon it, by using an ordinary coffer-dam that rested on the framework around the bed. In this bridge, as in that of Bordeaux, a provisional trial-weight, greater than the permanent load, was laid upon the bed, before commencing the superstructure.

To give greater security to foundations, they may be surrounded with a mass of loose stone blocks thrown in and allowed to find their own bed. Where piles are used and project some height above the bottom, besides the loose stone, a grating of heavy timber, placed between and enclosing the piling, may be used to give it greater stiffness and prevent outward spreading. In streams of a torrent character, where the bed is liable to be worn away, or shifted, an artificial covering, or apron of stone laid in mortar, has, in some cases, been used, both under the arches and above and below the bridge, as far as the bed seemed to require this protection. At the bridge of Bordeaux loose stone was spread over the river-bed between the piers, and it has been found to answer perfectly the object of the engineer, the blocks having, in a few years, become united into a firm mass by the clayey sediment of the river deposited in their interstices. At the elegant cast-iron bridge, built over the *Lary*, near Plymouth, resort was had to a similar plan for securing the bed, which is of shifting sand. The engineer, Mr. Rendel, here laid, in the first place, a bed of compact clay upon the sand bed between the piers, and imbedded in it loose stone. This method, which for its economy is worthy of note, has fully answered the expectations of the engineer.

III.

WOODEN BRIDGES.

597. Abutments. The abutments and piers of wooden bridges may be either of stone or of timber. Stone supports are preferable to those of timber, both on account of the superior durability of stone, and of its offering more security than frames of timber against the accidents to which the piers of bridges are liable from freshets, ice, &c.

598. Wooden abutments may be formed by constructing what is termed a *crib-work*, which consists of large pieces of square timber laid horizontally upon each other, to form the upright or sloping faces of the abutment. These pieces are halved into each other at the angles, and are otherwise firmly connected together by diagonal ties and iron bolts. The space enclosed by the crib-work, which is usually built up in the manner just described, only on three sides, is filled with earth carefully rammed, or with dry stone, as circumstances may seem to require.

A wooden abutment of a more economical construction may be made, by partly imbedding large beams of timber placed in a vertical or an inclined position, at intervals of a few feet from each other, and forming a facing of thick plank to sustain the earth behind the abutment. Wooden piers may also be made according to either of the methods here laid down, and be filled with loose stone, to give them sufficient stability to resist the forces to which they may be exposed; but the method is clumsy, and inferior, under every point of view, to stone piers, or to the methods which are about to be explained.

599. The simplest arrangement of a wooden pier consists (Fig. 146) in driving heavy square or round piles in a single row, placing them from two to four feet apart. These upright pieces are sawed off level, and connected at top by a horizontal beam, termed a *cap*, which is either mortised to receive a tenon made in each upright, or else is fastened to the uprights by bolts or pins. Other pieces, which are notched and bolted in pairs on the sides of the uprights, are placed in an inclined or diagonal position, to brace the whole system firmly. The several uprights of the pier are placed in the direction of the thread of the current. If thought necessary, two horizontal beams, arranged like the diagonal pieces, may be added to the system just below the lowest water-level. In a pier of this kind, the place of the starlings is supplied by two in-

clined beams on the same line with the uprights, which are termed *fender-beams*.

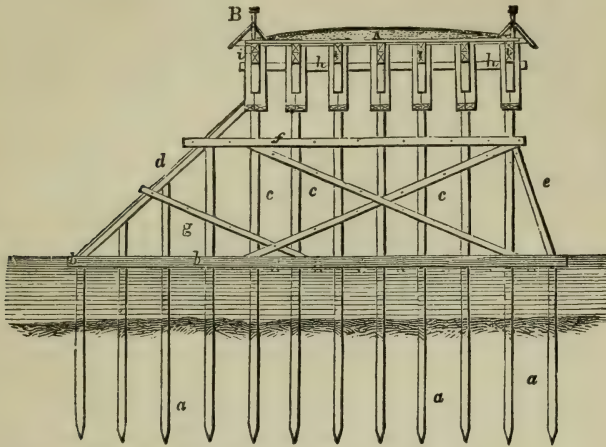


Fig. 146—Elevation of a wooden pier.

- a, piles of substructure.
- b, b, capping of piles arranged to receive the ends of the uprights c, c, which support the string-pieces i, i.
- d, upper fender beam.
- e, lower fender beam.
- f, horizontal ties bolted in pairs on the uprights.
- g, g, diagonal braces bolted in pairs on the uprights.
- h, capping of the uprights placed under the string pieces.
- A, roadway.
- B, parapet.

600. A strong objection to the system just described, arises from the difficulty of replacing the uprights when in a state of decay. To remedy this defect, it has been proposed to




Fig. 147—Plan O, elevation M, and cross section N, showing the arrangement of the capping of the foundation piles with the uprights.

- a, piles.
- b, capping of four beams bolted together.
- c, uprights.

drive large piles in the positions to be occupied by the uprights (Fig. 147), to connect these piles below the low-water level by four horizontal beams, firmly fastened to the heads of the piles, which are sawed off at a proper height to receive the

horizontal beams. The two top beams have large square mortises to receive the ends of the uprights, which rest on those of the piles. The rest of the system may be constructed as in the former case. By this arrangement the uprights, when decayed, can be readily replaced, and they rest on a solid substructure not subject to decay; shorter timber also can be used for the piers than when the uprights are driven into the bed of the stream.

601. In deep water, and especially in a rapid current, a single row of piles might prove insufficient to give stability to the uprights; and it has therefore been proposed to give a sufficient spread to the substructure to admit of bracing the uprights by struts on the two sides. To effect this, three piles (Fig. 148) should be driven for each upright; one just under its position, and the other two on each side of this, on a line perpendicular to that of the pier. The distance between the three piles will depend on the inclination and length that it may be deemed necessary to give the struts. The heads of the three piles are sawed off level, and connected by two horizontal clamping pieces below the lowest water.




Fig. 148—Elevation of the arrangement of a wide foundation for a wooden pier.

- a, upright.
- b, b, piles of the foundation.
- c, c, capping of the piles.
- d, d, struts to strengthen the uprights.
- e, e, clamping pieces bolted in pairs on the uprights.

A square mortise is left in these two pieces, over the middle pile, to receive the uprights. The uprights are fastened together at the bottom by two clamping pieces, which rest on those that clamp the heads of the piles, and are rendered firmer by the two struts.

602. In localities where piles cannot be driven, the uprights of the piers may be secured to the bottom by means of a grating, arranged in a suitable manner to receive the ends of the uprights. The bed, on which the grating is to rest, having been suitably prepared, it is floated to its position, and sunk either before or after the uprights are fastened to it, as may be found most convenient. The grating is retained in its place by loose stone. As a farther security for the piers, the uprights may be covered by a sheathing of boards, and the spaces between the sheathing be filled in with gravel.

603. As wooden piers are not of a suitable form to resist

heavy shocks, ice-breakers should be placed in the stream, opposite to each pier, and at some distance from it. In streams with a gentle current, a simple inclined beam (Fig. 149) covered with thick sheet-iron, and supported by uprights




Fig. 149—Elevation M and plan N of a simple ice-breaker.
a, a, foundation piles.
b, b, capping of piles.
c, c, uprights.
d, inclined fender-beam shod with iron.

and diagonal pieces, will be all that is necessary for an ice-breaker. But in rapid currents a crib-work, having the form of a triangular pyramid (Fig. 150), the up-stream edge of

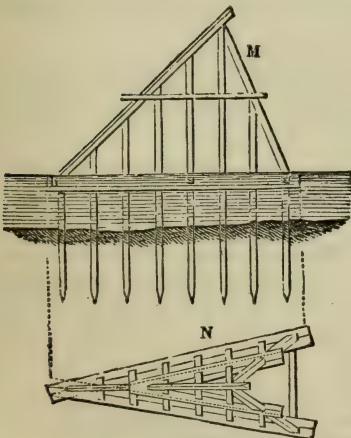


Fig. 150—Elevation M and plan N of the frame of an ice-breaker to be filled in with broken stone.

which is covered with iron, will be required, to offer sufficient resistance to shocks. The crib-work may be filled in, if it be deemed advisable, with blocks of stone.

604. In determining the length of the span the engineer must take into consideration the fact that wooden bridges require more frequent repairs than those of stone, arising

from the decay of the material, and from the effects of shrinking and vibrations upon the joints of the frames, and that the difficulty of replacing decayed parts, and readjusting the framework, increases rapidly with the span.

605. Bridge-frames may be divided into two general classes. To the one belong all those combinations, whether of straight or of curved timber, that exert a lateral pressure upon the abutments and piers, and in which the superstructure is generally above the bridge-frame. To the other, those combinations which exert no lateral pressure upon the points of support, and in which the roadway, &c., may be said to be suspended from the bridge-frame.

606. Definitions of some of the terms employed in bridge nomenclature.

A *Chord* is the upper or lower member in a *truss*. It extends from end to end of the structure. There are usually two chords, an upper and a lower chord. These may be parallel, as in Figs. 157 and 167, or the upper one may be curved (arched) and the lower one horizontal, or both may be curved. These pieces by some English writers are called *booms*, and by others *stringers*. The lower chord is often called a *tie*. The upper chord is sometimes called a *straining beam*.


A *Tie* is a piece which connects two parts and is subjected to tension.

A *Strut* is a general term which is applied to a piece in a truss which is subjected to compression. In proportioning it, it is treated as a *pillar*. In its more restricted sense, it is a *short* piece which is subjected to compression.

A *Tie-Strut*, or *Strut-Tie*, is a piece which may be subjected to tension and compression at different times, under different conditions of loading.

A *Brace* is an inclined piece which is subjected to compression. It is an inclined *strut*. In bridges, braces are sometimes distinguished as *main-braces* and *counter-braces*. This

Fig. 151.

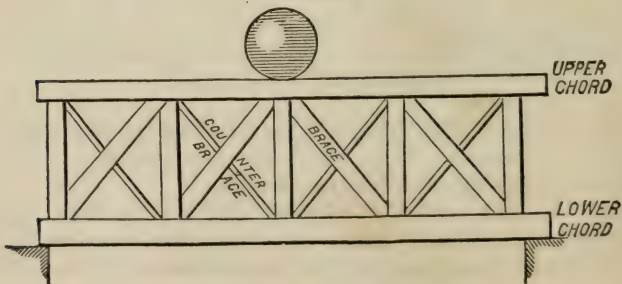

distinction is quite unnecessary in an analytical point of view, as will be seen hereafter, but it is so common in practice that it will not do to ignore it.

A *Main-Brace* is a brace which inclines from the end of a truss towards the centre, as in Fig. 151.

A *Counter-Brace* is one which inclines from the centre and towards the ends. In the same panel the counter-brace inclines the opposite way from the main-brace. See Fig. 151.

A *Tie-Brace* performs the office of both main and counter-brace; it is the same as a *Tie-Strut*.

607. Long's Truss. This was one of the first trusses of this country in which a scientific arrangement of the parts was observed. It was composed entirely of wood, even iron bolts for splicing the main beams being avoided. It consists in forming both the upper and lower beams (Fig. 152) of three parallel beams, sufficient space being left between the

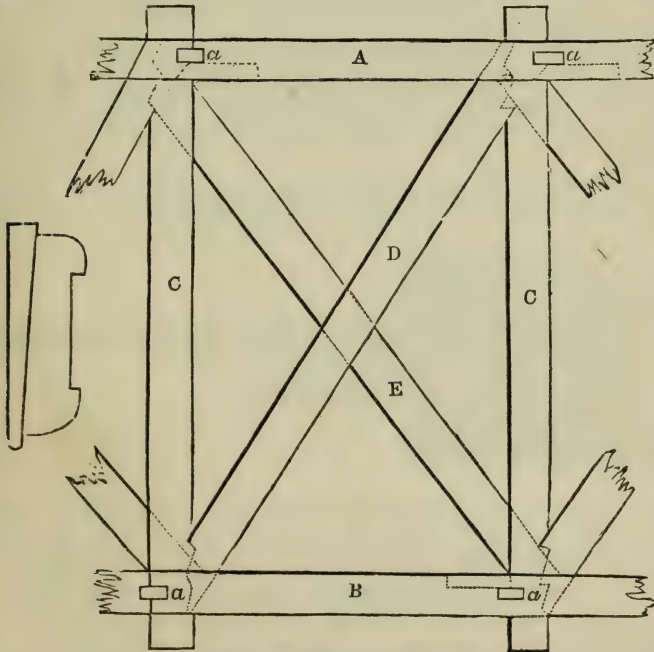


Fig. 152—Represents a panel of Long's truss.
 A and B, top and bottom strings of three courses.
 C, C, posts in pairs.
 D, braces in pairs.
 E, counter-brace single.
 a, a, mortises where jibs and keys are inserted.
 F, jib and key of hard wood.

one in the centre and the other two to insert the cross pieces, termed the *posts*; the posts consist of beams in pairs placed at suitable intervals along the strings, with which they are connected by wedge blocks, termed *jibs* and *keys*, which are inserted into rectangular holes made through the strings, and fitting a corresponding shallow notch cut into each post. A *brace* connects the top of one post with the foot of the one adjacent by a suitable joint. Another diagonal piece, termed the *counter-brace*, is placed crosswise between the two braces and their posts, with its ends abutting against the centre beam of the upper and lower strings. The counter-braces are connected with the posts and braces by wooden pins, termed *tree-nails*.

In wide bearings, the strings require to be made of several beams abutting end to end; in this case the beams should break joints, and short beams should be inserted between the centre and exterior beams wherever the joints occur, to strengthen them.

The beams in this combination are all of uniform cross section, the joints and fastenings are of the simplest kind, and the parts are well distributed to call into play the strength of the strings, and to produce uniform stiffness and strain.

608. Town's Truss.—The combination of Mr. Town (Fig. 153) consists in two main strings, each formed of two or




Fig 153.—Represents an elevation A, and end view, B, of a portion of Town's truss.

a, a, top strings.
b, b, bottom strings.
c, c, diagonal braces.

three parallel beams of two thicknesses breaking joints. Between the parallel beams are inserted a series of diagonal beams crossing each other. These diagonals are connected with the strings and with each other by tree-nails. When the strings are formed of three parallel beams, diagonal pieces are placed between the centre and exterior beams, and two intermediate strings are placed between the two courses of diagonals.

This combination, commonly known as the *lattice* truss, is of very easy mechanical execution, the beams being of a uni-

form cross section and length. The strains upon it are borne by the tree-nails, and when used for structures subjected to variable strains and jars, it loses its stiffness and sags between the points of support. It is more commendable for its simplicity than scientific combination.

609. Howe's Truss.—This truss consists of (Fig. 154) an upper and lower string, each formed of several thicknesses of beams placed side by side and breaking joints. On the upper side of the lower string and the lower side of the upper, blocks of hard wood are inserted into shallow notches; the blocks are bevelled off on each side to form a suitable point of support, or *step* for the diagonal pieces. One series of the diagonal pieces are arranged in pairs, the others are single and placed between those in pairs. Two strong bolts of iron, which pass through the blocks, connect the upper and lower strings, and are arranged with a screw cut on one end and a nut to draw the parts closely together.

This combination presents a judicious arrangement of the parts. The blocks give abutting surfaces for the braces superior to those obtained by the ordinary forms of joint for this purpose. The bolts replace advantageously the timber

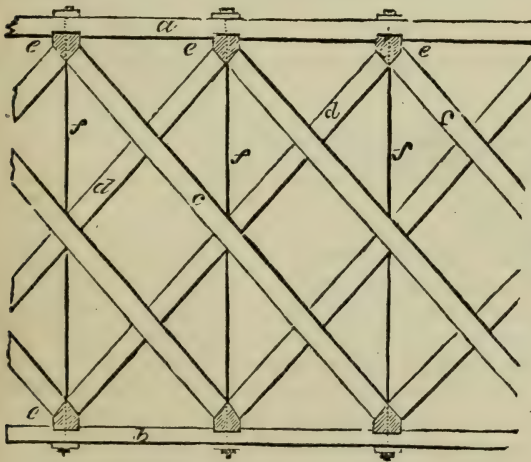


Fig. 154 — Represents an elevation of a portion of Howe's truss.
a, top string.
b, bottom strings.
c, *c*, diagonal braces in pairs.
d, single braces.
e, *e*, steps of hard wood for braces.
f, *f*, iron rods with nuts and screws.

posts, and in case of the frame working loose and sagging, their arrangement for tightening up the parts is simple and efficacious.

610. Schuylkill Bridge.—This bridge, designed and built by L. Wernwag, has the widest span of any wooden




Fig 86 is a perspective view of a part of one panel of the Howe truss, and shows quite clearly how the parts are arranged. For an analysis of these structures, see Wood's Treatise on Bridges and Roofs. ↓

bridge in this country. The bridge-frame (Fig. 155) consisted

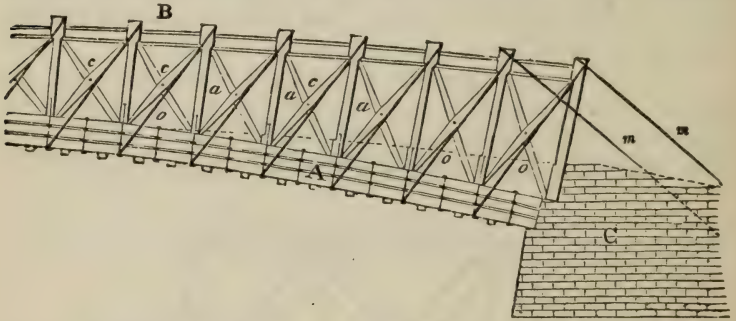


Fig. 155—Represents a side view of a portion of the open-curved rib of the bridge over the Schuylkill at Philadelphia.

A, lower curved built beam.

B, top beam.

a, a, posts.

c, c, diagonal braces.

o, o, iron diagonal ties.

m, m, iron stays anchored in the abutment C.

of five ribs. Each rib is an open-built beam formed of a bottom curved solid-built beam and of a single top beam, which are connected by radial pieces, diagonal braces, and inclined iron stays. The bottom curved beam is composed of three concentric solid-built beams, slightly separated from each other, each of which has seven courses of curved scantling in it, each course 6 inches thick by 13 inches in breadth; the courses, as well as the concentric beams, being firmly united by iron bolts, &c. A roadway that rests upon the bottom curved ribs is left on each side of the centre rib, and a footpath between each of the two exterior ribs. The bridge was covered in by a roof and a sheathing on the sides.

611. Burr's Truss.—Burr's plan, which (Fig. 156) consists

in forming each rib of an open-built beam of straight timber, and connecting with it a curved solid-built beam formed of two or more thicknesses of scantling, between which the

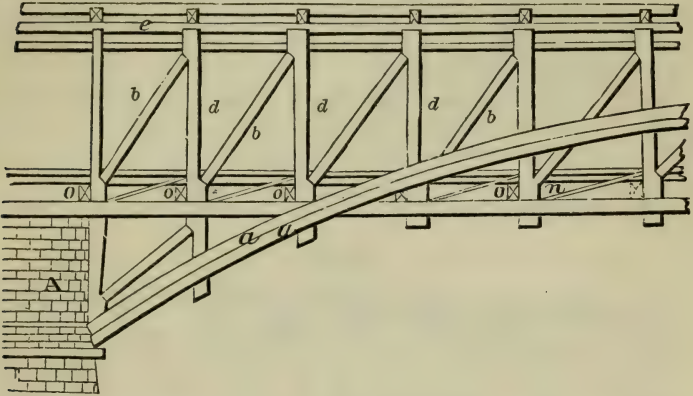



Fig. 156—Represents a side view of a portion of a rib of Burr's bridge.

a, a, arch timbers,
d, d, queen-posts,
b, b, braces,
c, c, chords,

e, e, plate of the side frame.
o, o, floor girders on which the flooring joists and flooring boards rest.
n, n, check braces,
i, i, tie-beams of roof.
A, portion of pier,

framework of the open-built beam is clamped. The open-built beam consists of a horizontal bottom beam of two thicknesses of scantling, termed the *chords*, between which are secured the uprights, termed the *queen posts*,—of a single top beam, termed the *plate of the side frame*, which rests upon the uprights, with which it is connected by a mortise and tenon joint,—and of diagonal braces and other smaller braces, termed *check braces*, placed between the uprights.

Fig. 157.

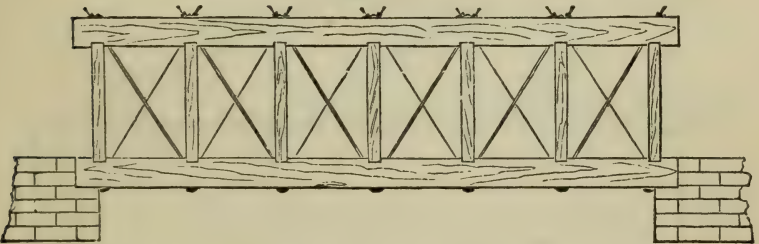


The curved-built beam, termed the *arch-timbers*, is bolted upon the timbers of the open-built beam. The bridge-frame

may consist of two or more ribs, which are connected and stiffened by cross ties and diagonal braces. The roadway-flooring is laid upon cross pieces, termed the *floor girders*, which may either rest upon the chords, or else be attached at any intermediate point between them and the top beam. The roadway and footpaths may be placed in any position between the several ribs.

612. Pratt's Truss. This truss (Fig. 157) has the same general form as Howe's, but differs in its details. The verticals here are wooden posts instead of iron rods, and the diagonals are iron ties instead of wooden braces.

613. McCallum's Truss. This truss (Fig. 158) is a modi-


Fig. 158.

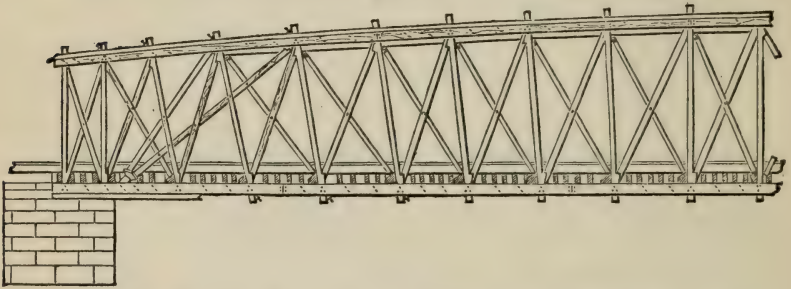


fication of Howe's, the essential difference of which consists in a curved upper chord instead of a horizontal one. The long braces at the end—called *arch braces*,—are not essential to this system. This system is stiffer than similar ones having horizontal chords.

614. A simple but effective structure, shown in Fig. 159,

Fig. 159.

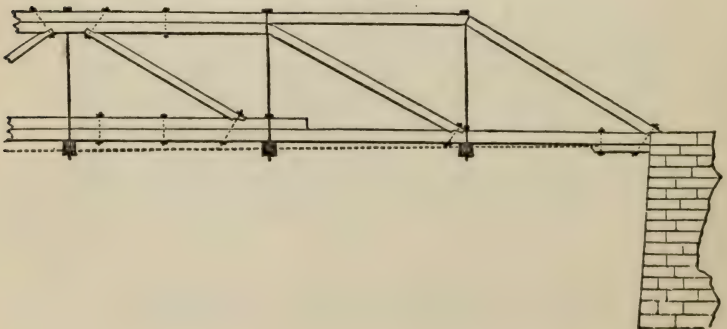

has been in use for some time on the N. Y. State canals for common road bridges, and for crossings on farms. There are no counter-braces, which, as may readily be shown, are unnecessary for short spans. (See Wood's *Treatise on Bridges and Roofs*, pp. 120 and 121.) The lower timber may be spliced, or in any other manner made continuous throughout. Another timber, which is placed on this, extends over two or four of the central bays. The verticals, which are iron rods, are made divergent, as shown in Fig. 159a.

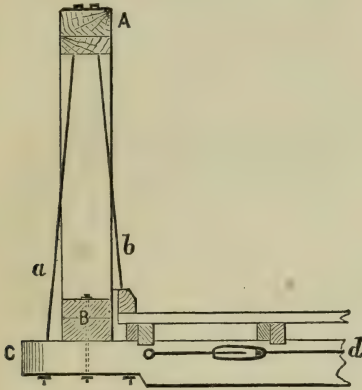

159 a. Cross section of a New York State canal bridge.
A, upper chord.
B, lower chord.
a, *b*, suspending rods, which incline outward.
C, a floor-girder.
d, a diagonal rod.

615. Wooden Arches. A wooden arch may be formed by bending a single beam (Fig. 160) and confining its extremi-




Fig. 160—Represents a horizontal beam *c* supported at its middle point by a bent beam *b*.

ties to prevent it from resuming its original shape. A beam in this state presents greater resistance to a cross strain than when straight, and may be used with advantage where great stiffness is required, provided the points of support are of sufficient strength to resist the lateral thrust of the beam. This method can be resorted to only in narrow bearings.

For wide arches a curved-built beam must be adopted; and for this purpose a solid (Figs. 161 and 162) or an open-built beam may be used, depending on the bearing to be spanned by the arch. In either case the curved beams are built in

the same manner as straight beams, the pieces of which they are formed being suitably bent to conform to the curvature of the arch, which may be done either by steaming the pieces, by mechanical power, or by the usual method of softening the woody fibres by keeping the pieces wet while subjected to the heat of a light blaze.

Fig. 161.

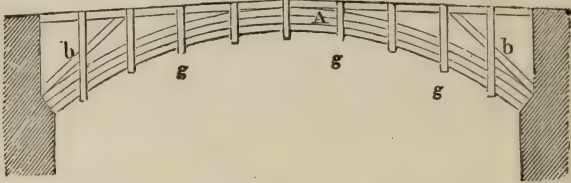


Fig. 161—Represents a wooden arch A, formed of a solid-built beam of three courses, which support the beams c, c by the posts g, g, which are formed of pieces in pairs. b, b, inclined struts to strengthen the arch by relieving it of a part of the load on the beams c, c.

Fig. 162.

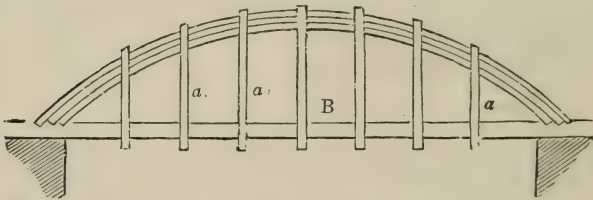


Fig. 162—Represents a wooden arch of a solid-built beam A, which supports the horizontal beam B by means of the posts a, a. The arch is let into the beam B, which acts as a tie to confine its extremities.

616. The number of ribs in the bridge-frame will depend on the general strength required by the object of the structure, and upon the class of frame adopted. In the first class, in which the roadway is usually above the frames, any requisite number of ribs may be used, and they may be placed at equal intervals apart, or else be so placed as to give the best support to the loads which pass over the bridge. In the second class, as the frame usually lies entirely, or projects partly above the roadway, &c., if more than two ribs are required, they are so arranged that one or two, as circumstances may demand, form each head of the bridge, and one or two more are placed midway between the heads, so as to leave a sufficient width of roadway between the centre and adjacent ribs. The footpaths are usually, in this case, either placed

between the two centre ribs, or, when there are two exterior ribs, between them.

617. In frames which exert a lateral pressure against the abutments and piers, the lowest points of the framework should be so placed as to be above the ordinary high-water level; and plates of some metal should be inserted at those points, both of the frame and of the supports, where the effect of the pressure might cause injury to the woody fibre.

618. The roadway usually consists of a simple flooring formed of cross joists, termed the *roadway-bearers*, or *floor-girders*, and flooring-boards, upon which a road-covering either of wood or stone is laid. A more common and better arrangement of the roadway, now in use, consists in laying longitudinal joists of smaller scantling upon the roadway-bearers, to support the flooring-boards. This method preserves more effectually than the other the roadway-bearers from moisture. Besides, in bridges which, from the position of the roadway, do not admit of vertical diagonal braces to stiffen the framework, the only means, in most cases, of effecting this object is in placing horizontal diagonal braces between each pair of roadway-bearers. For like reasons, stone road-coverings for wooden bridges are generally rejected, and one of plank used, which, for a horse-track, should be of two thicknesses, so that, in case of repairs, arising from the wear and tear of travel, the boards resting upon the flooring-joists may not require to be removed. The footpaths consist simply of a slight flooring of sufficient width, which is usually detached from and raised a few inches above the roadway surface.

619. When the bridge-frame is beneath the roadway, a distinct parapet will be requisite for the safety of passengers. This may be formed either of wood, of iron, or of the two combined. It is most generally made of timber, and consists of a hand and foot rail connected by upright posts and stiffened by diagonal braces. A wooden parapet, besides the security it gives to passengers, may be made to add both to the strength and stiffness of the bridge, by constructing it of timber of a suitable size, and connecting it firmly with the exterior ribs.

620. In bridge-frames in which the ribs are above the roadway, a timber sheathing of thin boards will be requisite on the sides, and a roof above, to protect the structure from the weather. The tie-beams of the roof-trusses may serve also as ties for the ribs at top, and may receive horizontal diagonal braces to stiffen the structure, like those of the roadway-

bearers. The rafters, in the case in which there is no centre rib, and the bearing, or distance between the exterior ribs, is so great that the roadway-bearers require to be supported in the middle, may serve as points of support for suspension pieces of wood, or of iron, to which the middle point of the roadway-bearers may be attached.

621. The frame and other main timbers of a wooden bridge will not require to be coated with paint, or any like composition, to preserve them from decay when they are roofed and boarded in to keep them dry. When this is not the case, the ordinary preservatives against atmospheric action may be used for them. The under surface and joints of the planks of the roadway may be coated with bituminous mastic when used for a horse-track; in railroad bridges a metallic covering may be suitably used when the bridge is not traversed by horses.

622. Wooden bridges can produce but little other architectural effect than that which naturally springs up in the mind of an educated spectator in regarding any judiciously-contrived structure. When the roadway and parapet are above the bridge-frame, a very simple cornice may be formed by a proper combination of the roadway-timbers and flooring, which, with the parapet, will present not only a pleasing appearance to the eye, but will be of obvious utility in covering the parts beneath from the weather. In covered bridges, the most that can be done will be to paint them with a uniform coat of some subdued tint. At best, from their want of height as compared with their length, covered wooden bridges must, for the most part, be only unsightly, and also apparently insecure structures when looked at from such a point of view as to embrace all the parts in the field of vision; and any attempt, therefore, to disguise their true character, and to give them by painting the appearance of houses, or of stone arches, while it must fail to deceive even the most ignorant, will only betray the bad taste of the architect to the more enlightened judge.

The art of erecting wooden bridges has been carried to great perfection in almost every part of the world where timber has, at any period, been the principal building material at the disposal of the architect; but iron at the present day is fast taking the place of wood in the more important bridges.

623. The following Table contains the principal dimensions of some of the most celebrated American and European wooden bridges:

NAME, ETC., OF BRIDGE.	Number of bays.	Width of widest bay.	Rise or depth of rib.
Wettengen bridge.....	1	390 ft.	—
Bridge of Schaffhausen.....	2	193 “	—
Bridge of Kandel.....	1	166 “	—
Bridge of Bamberg.....	1	208 “	16.9 ft.
Bridge of Freysingen.....	2	153 “	11.6 “
Essex bridge.....	1	250 “	—
Upper Schuylkill bridge.....	1	340 “	20 “
Market-street bridge.....	3	195 “	12 “
Trenton bridge.....	5	200 “	27 “
Columbia bridge.....	29	200 “	—
Richmond bridge.....	19	153 “	15.4 “
Springfield bridge.....	7	180 “	18 “
Susquehanna bridge.....	10	250 “	—

IV.

CAST-IRON BRIDGES.

624. Bridges of cast iron admit of even greater boldness of design than those of timber, owing to the superiority, both in strength and durability, of the former over the latter material; and they may therefore be resorted to under circumstances very nearly the same in which a wooden structure would be suitable.

625. The abutments and piers of cast-iron bridges should be built of stone, as the corrosive action of salt water, or even of fresh water when impure, would in time render iron supports of this character insecure; and timber, when exposed to the same destructive agents, is still less durable than cast iron.

626. The curved ribs of cast-iron bridge-frames have undergone various modifications and improvements. In the earlier bridges, they were formed of several concentric arcs, or curved beams, placed at some distance asunder, and united by radial pieces; the spandrels being filled either by contiguous rings, or by vertical pieces of cast iron upon which the roadway bearers were laid.

In the next stage of progress towards improvement, the curved ribs were made less deep, and were each formed of several segments, or panels cast separately in one piece, each panel consisting of three concentric arcs connected by radial pieces, and having flanches, with other suitable arrangements, for connecting them firmly by wrought-iron keys, screw-bolts, &c.; the entire rib thus presenting the appearance of three concentric arcs connected by radial pieces. The spandrels were filled either with panels formed like those of the curved

ribs, with iron rings, or with a lozenge-shaped reticulated combination. The ribs were connected by cast-iron plates and wrought-iron diagonal ties.

In the more recent structures, the ribs have been composed of voussoir-shaped panels, each formed of a solid thin plate with flanches around the edges; or else of a curved tubular rib, formed like those of Polonceau, or of Delafield, described further on. The spandrel-filling is either a reticulated combination, or one of contiguous iron rings. The ribs are usually united by cast-iron tie-plates, and braced by diagonal ties of cast and wrought iron.

609. The roadway-bearers and flooring may be formed either of timber, or of cast iron. In the more recent structures in England, they have been made of the latter material; the roadway-bearers being cast of a suitable form for strength, and for their connection with the ribs; and the flooring-plates being of cast-iron.

The roadway and footpaths, formed in the usual manner, rest upon the flooring-plates.

The parapet consists, in most cases, of a light combination of cast or wrought iron, in keeping with the general style of the structure.

627. The English engineers have taken the lead in this branch of architecture, and, in their more recent structures, have carried it to a high degree of mechanical perfection and architectural elegance. Among the more celebrated cast-iron bridges in England, that of *Coalbrookdale* belongs to the first epoch above mentioned; those of *Staines* and *Sunderland* to the second; and to the third, the bridge of *Southwark* at London; that of *Tewkesbury* over the Severn; that over the Lary near Plymouth, and a number of others in various parts of the United Kingdom.

The French engineers have not only followed the lead set them by the English, but have taken a new step, in the tubular-shaped ribs of M. Polonceau. The *Pont des Arts* at Paris, a very light bridge for foot-passengers only, and which is a combination of cast and wrought iron, belongs to their earliest essays in this line; the *Pont d'Austerlitz*, also at Paris, which is a combination similar to those of Staines and Sunderland, belongs to their second epoch; and the *Pont du Carrousel*, in the same city, built upon Polonceau's system, with several others on the same plan, belong to the last.

In the United States a commencement can hardly be said to have been made in this branch of bridge architecture;

the bridge of eighty feet span, with tubular ribs, constructed by Major Delafield at Brownsville, stands almost alone, and is a step contemporary with that of Polonceau in France.

The following Table contains a summary description of some of the most noted European cast-iron bridges :

NAME OF BRIDGE.	River.	No. of arches.	Span in feet.	Rise in feet.	No. of ribs.	Date.	Engineer.
Coalbrookdale.....	Severn.....	1	100.5	40	5	1779	—
Wearmouth.....	Wear.....	1	240	30	6	1796	Burdon.
Staines.....	1	181	16.5	7	1802	—
Austerlitz.....	Seine.....	5	106.6	10.6	—	1805	Lamandé.
Vauxhall.....	Thames.....	9	78	—	9	1816	Walker.
Southwark.....	Thames.....	3	240	24	8	1818	Rennie.
Tewkesbury.....	Severn.....	1	170	17	6	—	Telford.
Lary.....	Lary.....	5	100	14.5	5	1827	Rendel.
Carrusel.....	Seine.....	3	150	16	5	1838	Polonceau.

628. Iron Arches. Cast-iron arches may be used for the same objects as those of timber. The frames for these purposes consist of several parallel ribs of uniform dimensions, which are cast into an arch form, the ribs being connected by horizontal ties, and stiffened by diagonal braces. The weight of the superstructure is transmitted to the curved ribs in a variety of ways; most usually by an open cast-iron beam, the lower part of which is so shaped as to rest upon the curved rib, and the upper part suitably formed for the object in view. These beams are also connected by ties, and stiffened by diagonal braces.

Each rib, except for narrow spans, is composed of several pieces, or segments, between each pair of which there is a

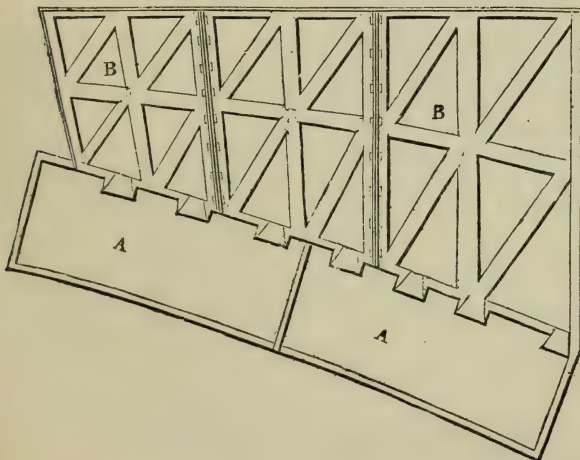


Fig. 162—Represents a portion of a cast-iron plate arch with an open cast-iron beam.

A, A, segments of the arch.

B, B, panels of the open beam connected at the joints *a b*.

joint in the direction of the radius of curvature. The forms and dimensions of the segments are uniform. The segments are usually either solid (Fig. 163) or open plates of uniform thickness, having a flanch of uniform breadth and depth at each end, and on the entrados and intrados. The flanch serves both to give strength to the segment and to form the connection between the segments and the parts which rest upon the rib.

The ribs are connected by tie-plates, which are inserted between the joints of the segments, and are fastened to the segments by iron screw bolts, which pass through the end flanches of the segments and the tie-plate between them. The tie-plates may be either open or solid; the former being usually preferred on account of their superior lightness and cheapness.

The framework of the ribs is stiffened by diagonal pieces, which are connected either with the ribs or the tie-plates. The diagonal braces are cast in one piece, the arms being ribbed, or *feathered*, and tapering from the centre towards the ends in a suitable manner to give lightness combined with strength.

The open beams (Fig. 163), which rest upon the curved ribs, are cast in a suitable number of panels; the joint between each pair being either in the direction of the radii of the arch, or else vertical. These pieces are also cast with flanches, by which they are connected together, and with the other parts of the frame. The beams, like the ribs, are tied together and stiffened by ties and diagonal braces.

Beams of suitable forms for the purposes of the structure are placed either lengthwise or crosswise upon the open beams.

629. Curved ribs of a tubular form have, within a few years back, been tried with success, and bid fair to supersede the ordinary plate rib, as with the same amount of metal they combine more strength than the flat rib.

The application of tubular ribs was first made in the United States by Major Delafield of the U. S. Corps of Engineers, in an arch for a bridge of 80 feet span. Each rib was formed of nine segments; each segment (Fig. 164) being cast in one piece, the cross section of which is an elliptical ring of uniform thickness, the transverse axis of the ellipse being in the direction of the radius of curvature of the rib. A broad elliptical flanch with ribs, or stays, is cast on each end of the segment, to connect the parts with each other; and three *chairs*, or *saddle-pieces*, with grooves in them, are cast upon the entrados of each segment, and at equal intervals apart, to receive the open beam which rests on the curved rib.

The ribs are connected by an open tie plate (Fig. 164). Raised elliptical projections are cast on each face of the tie plate, where it is connected with the segments, which are adjusted accurately to the interior surface of each pair of segments, between which the tie plate is embraced. The segments and plate are fastened by screw bolts passed through the end flanches of the segments.

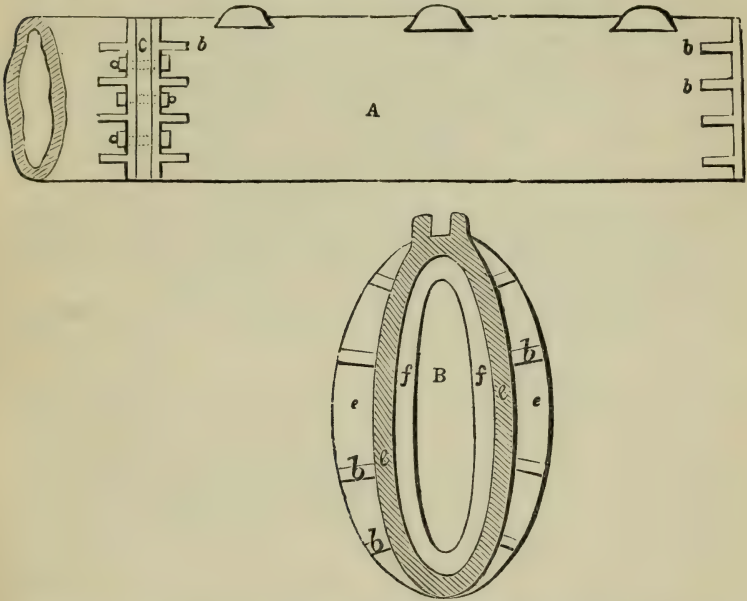


Fig. 164—Represents a side view A, and a cross section and end view B, through a saddle-piece of the tubular arch of Major Delafield.

a, a (Fig. A), a side view, and (Fig. B) an end view of the elliptical flanches of the end of each segment.

b, b, shoulders, or ribs to strengthen the flanches against lateral strains.

c, tie-plate, between the ribs.

f, f (Fig. B) side view of the rim of the tie-plate fitted to the interior of the tube.

d, d, (Figs. A and B) saddle-pieces to receive the open beams of a form similar to Fig. 163, which rest on the tubular ribs.

e, cross section of the rib through the saddle-piece.

The tie plates form the only connection between the curved ribs; the broad-ribbed flanches of the segments, and the raised rims of the tie plates inserted into the ends of the tubes, giving all the advantages and stiffness of diagonal pieces.

630. Tubular ribs with an elliptical cross section have been used in France for many of their bridges. They were first introduced but a few years back by M. Polonceau, after

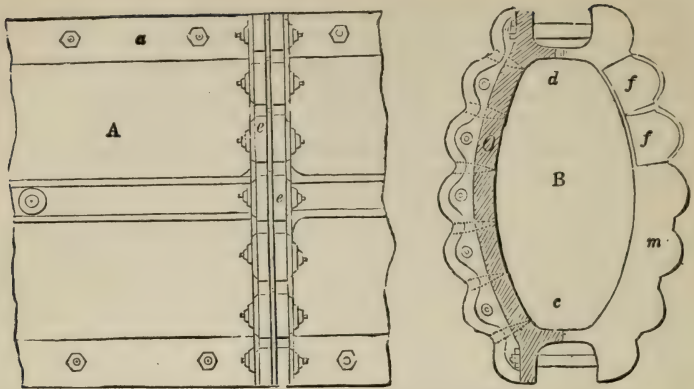


Fig. 165.—Represents a side view A, and a cross section and end view B, through a joint of M. Polonceau's tubular arch.
a, *a*, top flanch, *b*, *b*, bottom flanch of the semi-segments united along the vertical joint *cd* through the axis of the rib.
g h, side view of the joint between the flanches *e*, *e* of two semi-segments.
m, inner side of the flanches.
c, cross section of a semi-segment and top and bottom flanches.
f, *f*, thin wedges of wrought iron placed between the end flanches of the semi-segments to bring the parts to their proper bearing.

whose designs the greater part of these structures have been built. According to M. Polonceau's plan, each rib consists of two symmetrical parts divided lengthwise by a vertical joint. Each half of the rib is composed of a number of segments so distributed as to break joints, in order that when the segments are put together there shall be no continuous cross joint through the ribs.

The segments (Fig. 165) are cast with a top and bottom flanch, and one also at each end. The halves of the rib are connected by bolts through the upper and lower flanches, and the segments by bolts through the end flanches.

For the purposes of adjusting the segments and bringing the rib to a suitable degree of tension, flat pieces of wrought iron of a wedge shape are driven into the joints between the segments, and are confined in the joints by the bolts which fasten the segments and which also pass through these wedges.

To connect the ribs with each other, iron tubular pieces are placed between them, the ends of the tubes being suitably adjusted to the sides of the ribs. Wrought-iron rods which serve as ties pass through the tubes and ribs, being arranged with screws and nuts to draw the ribs firmly against the tubular pieces. Diagonal pieces of a suitable form are

placed between the ribs to give them the requisite degree of stiffness.

In the bridges constructed by M. Polonceau according to this plan, he supports the longitudinal beams of the roadway by cast-iron rings which are fastened to the ribs and to each other, and bear a chair of suitable form to receive the beams.

631. Open cast-iron beams are seldom used except in combination with cast-iron arches. Those of wrought iron are frequently used in structures. They may be formed of a top and bottom rail connected by diagonal pieces, forming the ordinary lattice arrangement, or a piece bent into a curved

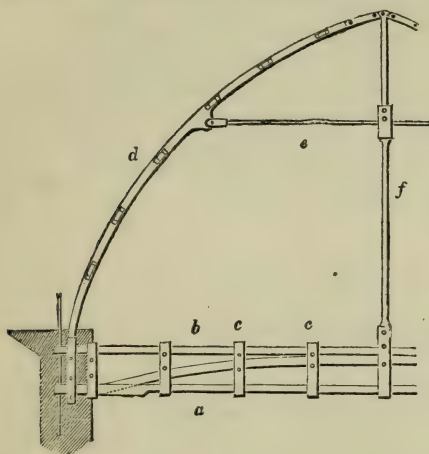


Fig. 166—Represents an open beam of wrought iron consisting of a top and bottom rail *a* and *b*, with an intermediate curved piece, the whole secured by the pieces *c, c*, in pairs bolted to them. *d, e,* and *f* represent the parts of a truss of a curved light roof, connected with the open beam; and also the manner in which the whole are secured to the wall.

form may be placed between the rails, or any other suitable combination (Fig. 166) may be used which combines lightness with strength and stiffness.

632. **Effects of Temperature on Stone and Cast-iron Bridges.** The action of variations of temperature upon masses of masonry, particularly in the coping, has already been noticed. The effect of the same action upon the equilibrium of arches was first observed by M. Vicat in the stone bridge built by him at Souillac, in the joints of which periodical changes were found to take place, not only from the ranges of temperature between the seasons, but even daily. Similar phenomena were also very accurately noted by Mr. George Rennie in a stone bridge at Staines.

From these recorded observations the fact is conclusively established, that the joints of stone bridges, both in the arches

and spandrels, are periodically affected by this action, which must consequently at times throw an increased amount of pressure upon the abutments, but without, under ordinary circumstances, any danger to the permanent stability of the structure.

When iron was first proposed to be employed for bridges, objections were brought against it on the ground of the effect of changes of temperature upon this metal. The failure in the abutments of the iron bridge at Staines was imputed to this cause, and like objections were seriously urged against other structures about to be erected in England. To put this matter at rest, observations were very carefully made by Sir John Rennie upon the arches of Southwark bridge, built by his father. From these experiments it appears that the mean rise of the centre arch at the crown was about $\frac{1}{40}$ th of an inch for each degree of Fahr., or 1.25 inches for 50° Fahr. The change of form and increase of pressure arising from this cause do not appear to have affected in any sensible degree the permanent stability either of this structure, or of any of a like character in Europe.

V.

IRON TRUSSED BRIDGES.

633. AMONG the earliest and most meritorious of the iron bridges of this country is Whipple's Trapezoidal Truss (see Fig. 167). So far as the arrangement of ties and struts are concerned it is similar to the Pratt Truss.

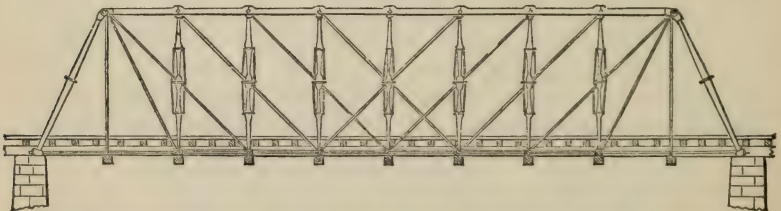


Fig. 167.—The upper chord is of cast-iron and made in sections, the length of each piece being equal to the length of a bay. The lower chord is composed of a succession of links (see Fig. 168), which receive cast-iron blocks at their ends. The cast-iron blocks form steps for securing the lower ends of the vertical posts. The posts have openings near the middle of their length, through which the main and counter-ties pass. The posts are trussed at the middle, as shown in the figure.

In this truss the end members are inclined, so that the general form of the outline is that of a trapezoid. All un-

necessary members are omitted, and hence comparatively few counter-ties are used. In the Fig. only two are shown—one each side of the centre. The number of counter-ties depends upon the relation of the moving load to that of the weight of the bridge (see articles 107 and 108 of Wood's *Treatise on Bridges and Roofs*).

The lower chord is sometimes made of links of iron (Fig. 168), which pass over cast-iron blocks under the vertical




Fig. 168.—One of the links of the lower chord.

posts (Fig. 169). The lower chord may be, and at the pres-



Fig. 169.—A joint in the lower chord of a Whipple Truss.

ent day often is, made of eye-bars (Fig. 170). The proper



Fig. 170.—One end of an eye-bar used in tension members of bridges and roofs.

form and dimensions of the eyes and the proper size of the pins has been the subject of considerable experiment.

At first it was supposed that the total section on both sides of the eye should equal half the section of the pin, but experiments quickly showed that when made in this proportion the eyes would tear out before the shearing strength of the pin was reached. According to some experiments made by Sir Charles Fox, he concluded that it was best to make the bearing surface between the pin and concave surface of the eye about equal to the least section of the link; or, in other words, the diameter of the pin should equal about two-thirds of the diameter of the link.

This rule, however, is not rigidly adhered to by our most eminent bridge builders. Each has a rule of his own. Some make the eye thicker than the link; others make them somewhat pear-shaped by adding material back of the eye (Fig. 171); while still others make them of the form shown in Fig. 172.



Fig. 171.—Form of eye-bar.

But in all cases the total section of the material through the eye is made to exceed that through the bar, and the section of the pin also exceeds that of the bar.




Fig. 172—Another form of eye-bar.

634. Modifications of Whipple's Truss. Different bridge builders have modified the details of Whipple's Truss, so as to suit their convenience or fancy, or to make them conform with modern practice. It is useless to attempt to give all these modifications. They have, however, given rise to certain names of bridges, such as the Murphy-Whipple bridge, Linville bridge, Jones's bridge, etc., etc.


635. Linville Bridge. This bridge, the details of which (Figs. 173 and 174) have been very thoroughly and carefully worked out, has a wide reputation.

The improvements consist in employing tubular forms of wrought iron for members used to resist compressive strains, and weldless eye-bars to resist tensile strains, by this means economizing material and reducing the dead weight of the structures. In the accompanying details of the chords, struts, and ties, and the floor system and lateral connections, some of the leading principles of the Linville truss are illustrated.

The upper chords A, are composed of channel (C) bars and I beams, to which are riveted top plates, and sometimes bottom plates, forming a tubular compressive member of great strength. When the lower plate is used, elliptical holes are cut out in order to admit of painting the interior. The chords are generally made in sections, one panel in length. The connection between the suspension ties and upper chords are effected by means of angle blocks, through which pass the suspension ties, with enlarged screw threads and nuts for adjustment, or by means of pins passing through the chords, and through loops or eyes on the suspension ties.

The struts B are circular or polygonal tubes (Fig. 174a), composed of two or more rolled bars united by rivets through flanges, or by transverse tie-bolts passing through the struts between the flanges. The struts are generally swelled and opened to allow the interior to be repainted in order to prevent their rapid destruction by oxydation.

The lower chords are made by upsetting the enlarged eye ends, by compressing them when highly heated into moulds or dies. They are afterwards forged and rewelded under a hammer.

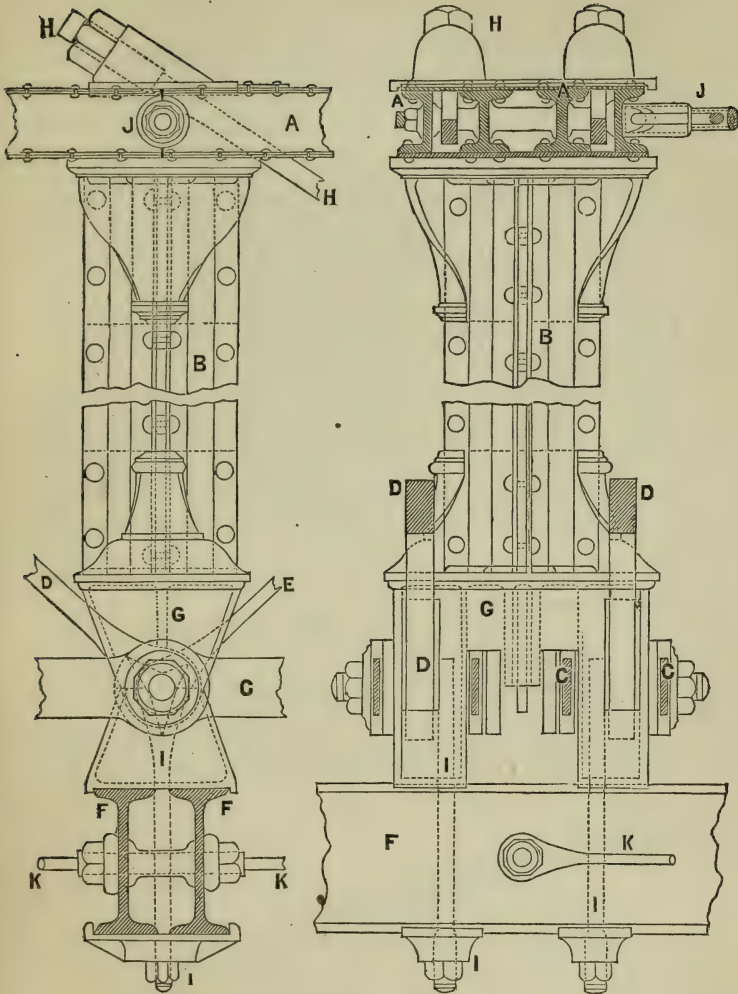

Figs. 173, 174—Details of Linville's truss. Fig. 173 is a cross section, and Fig. 174 a right section of a portion of the truss.

A A, upper chord, composed of channel bars ([]) and I sections. B, the post. (See Fig. 174 A.) C C, the lower chord. D D, the lower end of a main tie; and H H, the upper end of a main tie.

E is a counter-tie.

G G, bases of the posts or struts.

J, cross horizontal diagonal tie.

I I, suspenders for supporting cross-ties.

K, horizontal diagonal tie.




Fig. 174 A—Cross section of one of the forms of post used in a Linville truss.

These weldless chords and tubular posts have, in many cases, superseded older forms. The lower chords *C C* disposed at each side of the suspension ties *D*, and counter-tie *E*, and between ribs in the bases *G* of the posts or struts, are effectually combined with the struts and ties by means of a connecting-pin. The tendency to bend the connecting-pin is obviated by this distribution of the strains.

The pin can fail only by shearing.

From the connecting-pins depend loops or suspenders, *I I*, which support the rolled cross-girders *F*, that sustain the track-stringers and track. The upper lateral struts of wrought or cast iron are secured at the connecting-pins, the ties being attached to an eye-plate, or in a jaw-nut secured to the connecting-pins.

The lateral ties *J* are adjusted by means of sleeve-nuts with right and left hand-screws.

The lower laterals *K K* are attached to the cross girders, and adjusted in a similar manner.

The bases and capitals of the posts are made either of wrought or cast iron.

To secure greater efficiency in the struts by dispensing with the round bearing, and at the same time retain the pin

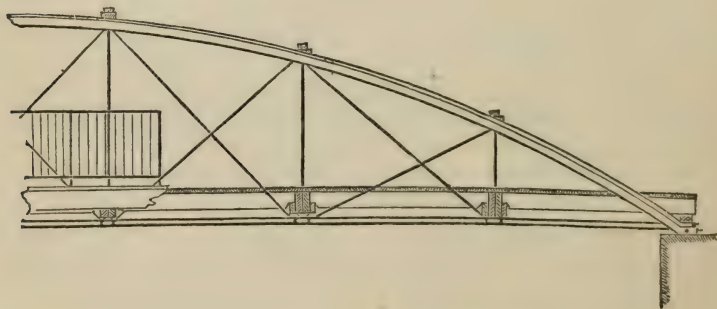


Fig. 175—An Arched Truss after the general plan of Whipple's. The lower chords or tie-rods pass through the ends of the arch, and are secured by nuts on the ends of the rods.

connection between the chords and ties, the lower chords are brought compactly together between and outside of the suspension-ties and suspenders, and a bearing provided on the upper edges of the chords for the lower ends of the posts. The upper ends also have a flat bearing.

636. Arched Truss. Fig. 175 shows the general form of a Whipple Arched Truss. The upper chord is composed of hollow tubes, made in sections of about a panel length.

637. Bollman's Truss. The general outline of Bollman's Truss is shown in Fig. 176.

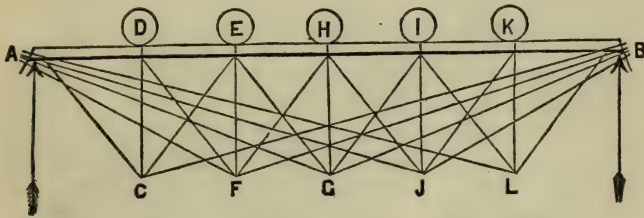


Fig 176—Bollman's Truss. A D, D E, etc., are sections of the upper chord—cast iron and usually hollow. D C, E F, etc., are hollow cast-iron posts. A C, C B; A F, F B, etc., are tension rods; D F, C E, etc., are panel rods.

One of the leading features of this bridge is, the load at each post or joint is carried *directly* to the supports at the ends by means of a pair of tension (or suspension) rods. Thus a load at E is supported by the post E F, and is thence supported by the rods A F and F B. The panel rods D F, E C, E G, etc., serve to keep the upper chord in place, and in case of an undue strain upon, or failure of, one of the long suspension-rods, may transmit the strains to the other members of the truss.

The suspension rods being of unequal length will be unequally elongated or contracted by the same strain, or by changes in the temperature. In order to prevent severe cross strains upon the posts due to these causes, the suspension-rods are connected to the lower ends of the posts by means of a link which is a few inches in length, and which permits of a small lateral movement at the ends of the rods without any corresponding movement of the posts. The suspension-rods are made of flat iron, and pass through the ends of the upper chord where they are secured by means of pins which pass through the ends of the chords.

If the roadway passes above the upper chord, it is called a deck bridge, and the lower chord may be dispensed with.

But if it passes on the level of the lower chord (Fig. 176a.) the lower chord may be simply suspended upon the posts; and not be depended upon for resisting tension. The lower chord in this case may also be entirely dispensed with; for cross-ties, or joists, may be secured to the posts and longitudinal joints be placed upon them. If the lower chord is used and is made continuous so as to resist tension, it vir-

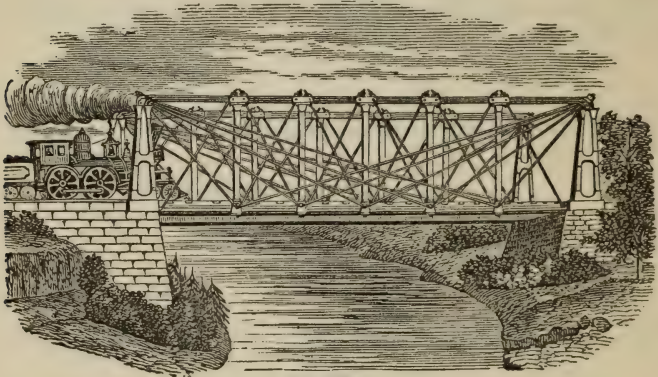


Fig. 176a.

tually changes it into a Whipple truss in which the long suspension-rods are unnecessary members. Still, in this case, the truss—especially the panel rods, are not so proportioned as to make it safe to omit the long suspension-rods.

638. **Fink Truss.** The outline or skeleton of a Fink truss is shown in Fig. 177.

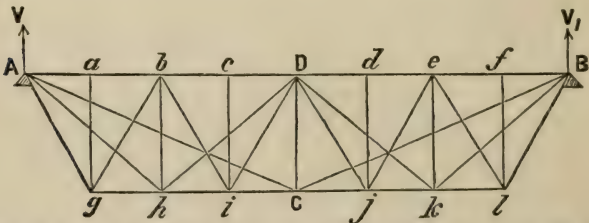


Fig. 177—Fink Truss. $A B$ the upper chord, $g l$ the lower chord, $a g, b h$, etc., are posts, $A C, C E$ long suspension-rods. $A h, h D$, etc., secondary suspension-rods.

This truss consists of a primary system of king posts, $A C B$, Fig. 177; two secondary systems, $A h D$ and $D k B$; four tertiary systems, $A g b, b i D, D j e$, and $e l B$, and so on.

The posts, suspension-rods and chords may be similar in detail to the systems previously described.

The noted Louisville bridge, across the Ohio River at Louisville, is made upon this plan.

DIMENSIONS OF THE LOUISVILLE BRIDGE.

It is 5,294 feet long, divided into the following spans from centre to centre of piers:

Kentucky abutment.....	32.5 feet.
2 spans of 50 feet.....	100.0 "
1 pivot-draw over canal.....	264.0 "
4 spans of 149.6.....	598.4 "
2 spans of 180.0.....	360.0 "
2 spans of 210.0.....	420.0 "
2 spans of 227.0.....	454.0 "
1 span of 370.0.....	370.0 "
6 spans of 245.5.....	1,473.0 "
1 span of 400.....	400.0 "
3 spans of 180.....	540.0 "
1 span of 149.6.....	149.6 "
1 span of 100.....	100.0 "
Indiana abutment.....	32.5 "

Total length..... 5,294.0 "

639. Post's Truss. The main peculiarity of this truss is in its form. The upper ends of the posts are carried towards the centre of the bridge, an amount equal to half a bay, and as all the bays are equal the posts in each half of the truss are all parallel to each other (Fig. 178).

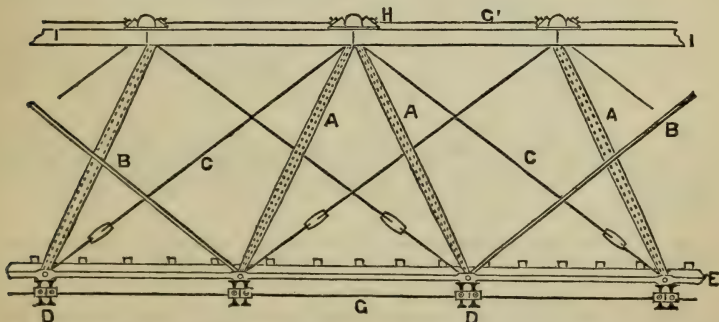


Fig. 178—Side view of panels of a Post Truss. A A are struts. B B, main ties. C C, counter ties. E E, bottom chords. I I, top chords. D, ends of floor-beams. G, lower horizontal diagonal ties. G', upper horizontal diagonal ties.

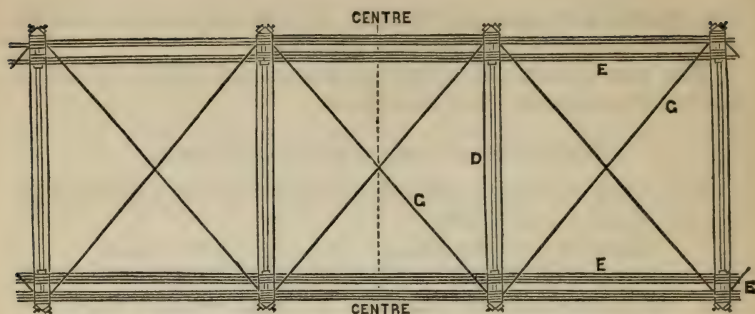


Fig. 179—Plan of the roadway. G G are brace-rods. E E, bottom chord. D are floor-beams.

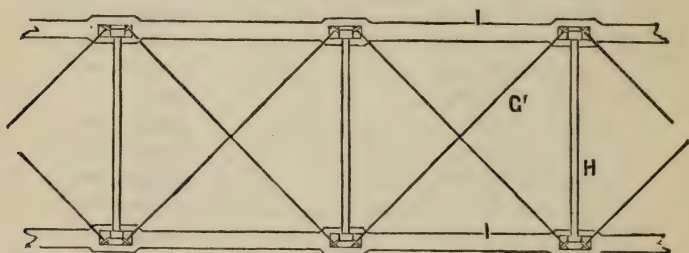


Fig. 180—Plan of the top of the bridge. I, top chord. H, cross-tie or strut. G', upper horizontal tie.

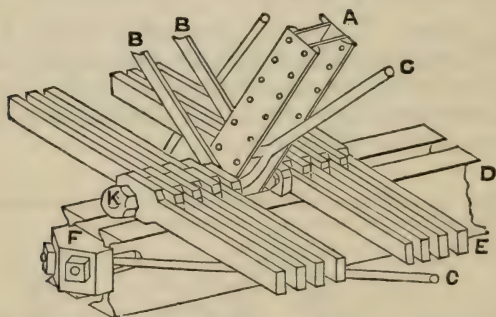


Fig. 181—Shows details at a joint of the lower chord. F is a cast-iron block for receiving the ends of the horizontal tie-rods. K is an iron bolt which passes through the ends of the links which form the lower chord. The other letters refer to the same parts as in the preceding figures.

DESCRIPTION OF POST'S IRON BRIDGE.

A A (Figs. 178, 179, 180 and 181)—Are the *struts*, composed of two rolled-iron channel bars, with plates riveted on their flanges, forming a hollow column having a rectangular cross-section. The struts are swelled in the centre by spring-

ing the channel-bars and having the plates sheared to the required shape.

The bearings of the struts upon the pins (K) are of either cast or wrought iron, and are enclosed between the side-plates, and abut against the channel-bars, and are riveted to both. The pin holes are bored through shoes and plates.

B B—Are the *main ties*, or main suspension braces, and are made of flat bar-iron with die-forged heads at the ends, bored out to fit the pins.

C C—Are the *counter ties*, made of round iron, with forged eyes at the ends to receive the pins, and having turn-buckles at a convenient distance from the bottom end, for purposes of adjustment.

D D—Are the floor-beams, suspended in pairs from the chord pins at each panel point, by means of eye-bolts or by stirrups passing over the chord pins and under a bolt through the webs of the beams.

E E—Are the bottom chord bars or links, made of flat bar-iron, with die-forged heads, and bored holes for the chord pins. The sizes of the bars in the respective panels are determined by the strains, the first and second panels having two bars, the third and fourth having four bars each, the fifth and sixth having six bars each, etc., to the centre of the span.

F—Is a bottom lateral brace angle block of cast iron, fastened to the ends of the floor-beams, which form the bottom lateral strut.

G G—Are the lateral brace-rods, of round iron, having screws and nuts at their ends, for adjustment.

H H—Are top lateral struts, made of rolled-iron **I** beams, or channel bars in pairs. These struts have a cast-iron shoe at their ends, and are bolted to the top plate of the top chord, by bolts passing through shoes, top plate of chord, and through the joint box in the top chord. The top lateral brace rods pass through the cast-iron shoes, with nuts on the outside.

I I—Are the top chords. When made of wrought iron they are composed of channel bars with covering plate riveted to the flanges on the top, and bars riveted at intervals across the bottom flanges, either diagonally or straight across to keep the channel bars in line. Additional sectional area is obtained by riveting plates on the inside of the channel bars.

The top chords are made in panel lengths, with their ends squared by machinery to insure true bearings—and when of cast iron have a rectangular cross-section, with the inside cored out to obtain the necessary sectional area to provide for the compression strain.

The connection of the struts and main and counter braces is made by means of a pin passing through a cast-iron box which encloses the mall, the length of the pin being just equal to the width of the box. The top-chord sections have a recess which fits over the box, and when the connection is made in the box the pieces of top chord are laid on, and cover the whole. The joint is then secured by the bolts which pass through the top lateral strut, top chord and joint box.

DESCRIPTION OF POST'S "COMBINATION" OR "COMPOSITE" BRIDGE.

This bridge is composed partly of wood and partly of iron, as shown in Figs. 181*a*, 181*b*, and 181*c*.

A, A—Top chord, packed and framed as shown in Figs. 181*a* and 181*b*.

B B—Struts, framed with square end at the top entering and abutting against joint box E (Fig. 181*b*) and fitted at bottom ends into strut shoe K (Fig. 181*c*).

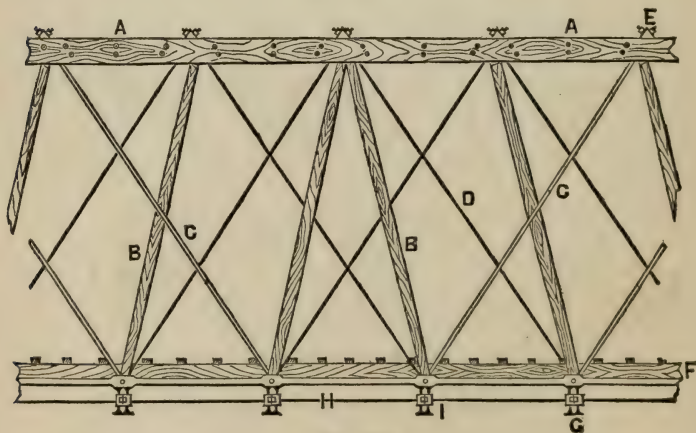


Fig. 181*a*.

C C—Main suspension ties, of square, round or flat iron, with eye at lower end and screw at upper end, passing through joint box E, secured by nuts.

D D—Counter braces, of square or round iron, made similar to main ties.

E E—Cast-iron joint boxes enclosed in top chord, and receiving the struts, main ties and counters.

This box has a flange around the bottom to support the weight of the top chord, which lies upon and is bolted to it.

F F—Bottom chord links of flat iron, with heads at each end, bored to receive the pins (Fig. 181c).

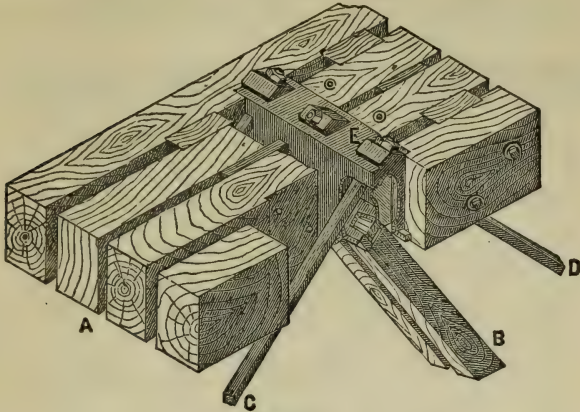


Fig. 181b.

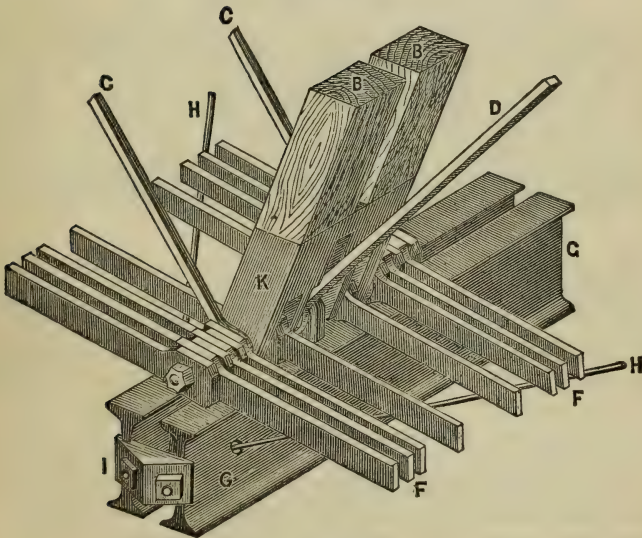


Fig. 181c.

G G—Rolled iron floor-beams, suspended to chord pins.
 H H—Bottom lateral ties, round iron rods with screws.
 I I—Bottom lateral angle block, cast iron.
 K—Cast-iron strut shoes, having sockets to receive struts

and drilled holes for chord pins passing through flanges or ribs below the sockets.

640. Alleghany River Bridge at Pittsburgh, Pa. This is a lattice iron bridge (Fig. 182), and is similar to several

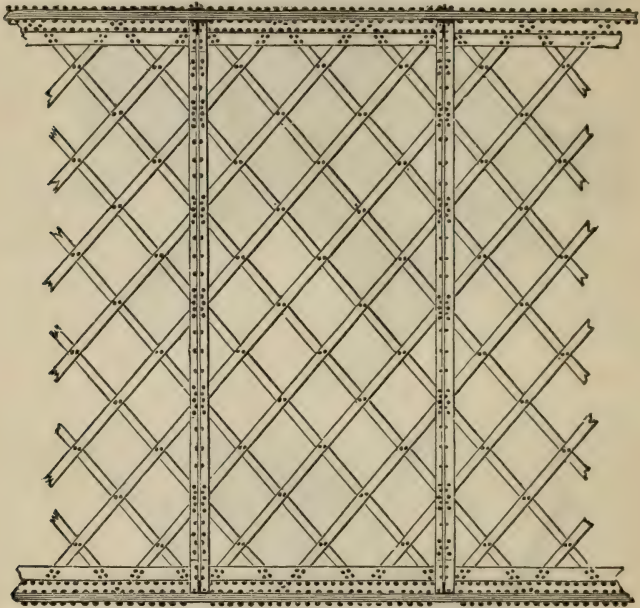


Fig. 182.

other structures which have been made in this country. There is a similar one on the New York Central Railroad, at Schenectady, N. Y., and another near Rome, of the same State.

641. St. Louis and Illinois Bridge. This noted structure might properly be called a steel arch. It is now in course of erection, and is to consist of three spans, the central one of which is 515 feet, and each of the end ones 497 feet. There are eight arches in each span, arranged in sets of two and two; and in each set one arch is directly over the other, and the two are trussed together by link-bars. The arches are composed of steel tubes, which are made of steel staves, as will now be explained.

All the steel in this structure is of the very best quality. The standard fixed for it by the Chief Engineer, Capt. Eads, was so high as to make it almost impossible for our best steel manufacturers to produce it. The coefficient of elasticity was

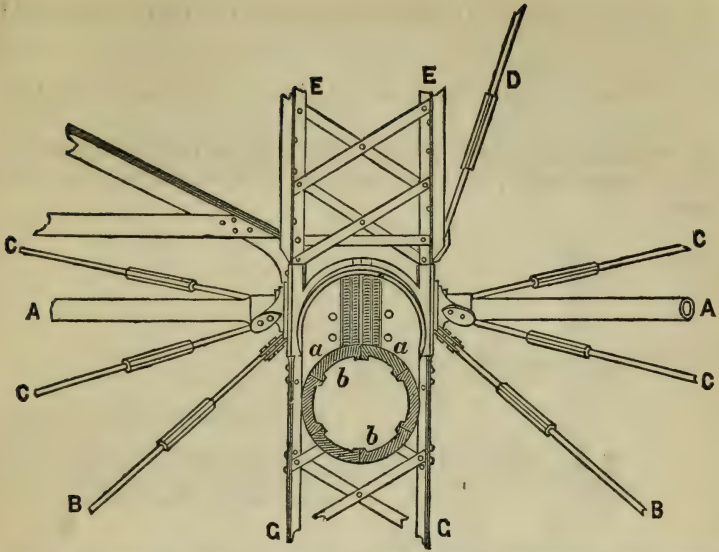


Fig. 183—Section of a tube, St. Louis and Illinois Bridge. *a a* is a steel casing about three-eighths of an inch thick, which is lapped over, and riveted like the plates of a steam-boiler. *b, b* are steel staves which are forced into the casing.

A A, Figs. 183 and 184, are cross-rods for connecting the arches together laterally.

B B B are diagonal rods in a vertical, for connecting the upper arch in one set to the lower arch in the adjacent set.

C C C are diagonal rods in the plane of the tubes, for connecting the joint of one set with the joint which is in advance of or back of the corresponding joint in the adjacent set.

D is a vertical diagonal rod for trussing the roadway.

E E are trussed vertical posts, the lower ends of which are secured to the arch, and the upper ends support the roadway.

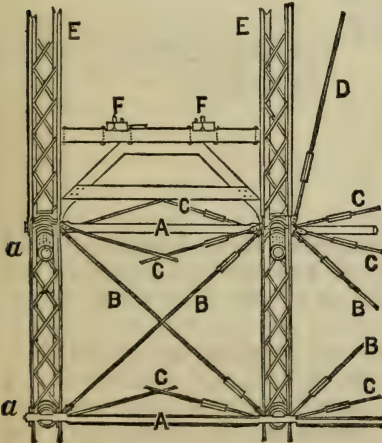


Fig. 184—Is a cross-section of two arches of the bridge. Two sets of tubes which form the arch are shown, also the posts and rods which have been described above.

F F is the track for a railroad; the carriage road passing above this.

to be between 26,000,000 pounds and 30,000,000 pounds, and it was to sustain a strain of 60,000 pounds, without producing a permanent set.

All the workmanship is of a higher order than is usual in bridge construction. Special machines and tools were made for making the several joints. An error of one thirty-second of an inch might, in most cases, be very troublesome, if not fatal.

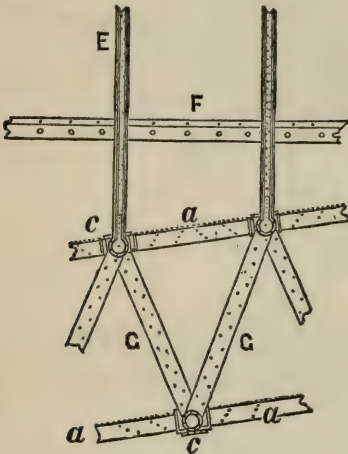


Fig. 185—Shows a side view of a portion of the arch.

G G are diagonal posts which are trussed, as shown in Fig. 183, for connecting the two arches together. The other letters refer to the same parts as in Figs. 183 and 184.

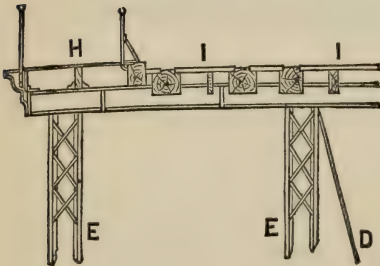


Fig. 186—Shows a cross-section of a portion of the upper roadway.

I I is the carriage-way.
H is the side-walk.

The tubes are straight throughout their length, but the ends are planed off in the direction of the radius of the arch, so that the arch is really a polygon having short sides. Several rectangular annular grooves are cut near the ends of each tube; and after the tubes are put in place, their ends abutting against each other, they are joined, and firmly secured by means of a heavy and nicely-fitted iron coupling. In this way the arch is made continuous. A strong steel pin

passes through the coupling and the ends of the tubes, one half of the pin being in each tube. One length of tube is put up at a time, and is connected to all the others, which are properly placed by cross-rods, A A, Figs. 183 and 184, and also diagonal rods C C and B B. The diagonals G G are also secured. These are secured to the pins *c c*, Fig. 185. The vertical posts E E, which support the railroad, are trussed by means of diagonal bars, as shown in Fig. 184. Each skew-back of the arch is secured to the abutments by means of two six-inch steel rods or bolts, which pass through the wrought-iron skew-backs, and several feet into the masonry. This bridge, when completed, will be one of the most remarkable structures of its kind in the world, and can hardly fail to establish many important principles in iron structures.

642. Kuilenberg Bridge. The span of this bridge is about the same as that of the St. Louis and Illinois bridge, as will be seen from the following dimensions. The lower chord of this bridge (Fig. 187) is horizontal, and the upper chord is

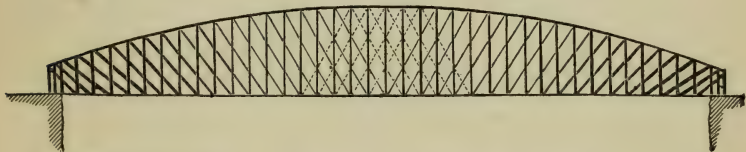


Fig. 187—Kuilenberg Bridge. Span between the abutments, 152 meters. Total length, including the parts on the abutments, 156.8 meters (about 515 feet). Length of each bay, 4 meters. Depth of the truss at the centre, 29 meters.

the arc of a circle, the radius of which is 809 feet. It is of the general plan of the Pratt or Whipple systems, only that the upper chord is curved.

VI.

TUBULAR BRIDGES.

643. Tubular Frames of Wrought-iron. Except for the obvious application to steam boilers, sheet iron had not been considered as suitable for structures demanding great strength, from its apparent deficiency in rigidity; and although the principle of gaining strength by a proper distribution of the material, and of giving any desirable rigidity by combinations adapted to the object in view, were at every moment acted upon, from the ever-increasing demands of the art, engineers seem not to have looked upon sheet iron as suited to such

purposes, until an extraordinary case occurred which seemed about to baffle all the means hitherto employed. The occasion arose when it became a question to throw a bridge of rigid material, for a railroad, across the Menai Straits; suspension systems, from their flexibility, and some actual failures, being, in the opinion of the ablest European engineers, unsuitable for this kind of communication.

Robert Stephenson, who for some years held the highest rank among English engineers, appears, from undisputed testimony, to have been the first to entertain the novel and bold idea of spanning the Straits by a tube of sheet iron, supported on piers, of sufficient dimensions for the passage within it of the usual trains of railroads. The preliminary experiments for testing the practicability of this conception, and the working out of the details of its execution, were left chiefly in the hands of Mr. William Fairbairn, to whom the profession owes many valuable papers and facts on professional topics. This gentleman, who, to a thorough acquaintance with the mode of conducting such experiments, united great zeal and judgment, carried through the task committed to him; proceeding step by step, until conviction so firm took the place of apprehension, that he rejected all suggestions for the use of any auxiliary means, and urged, from his crowning experiment, reliance upon the tube alone as equal to the end to be attained.

Numerous experiments were made by him upon tubes of circular, elliptical, and rectangular cross-section. The object chiefly kept in view in these experiments was to determine the form of cross-section which, when the tube was submitted to a cross strain, would present an equality of resistance in the parts brought into compression and extension. It was shown, at an early stage of the operations, that the circular and elliptical forms were too weak in the parts submitted to compression, but that the elliptical was the stronger of the two; and that, whatever form might be adopted, extraordinary means would be requisite to prevent the parts submitted to compression from yielding, by "puckering" and doubling. To meet this last difficulty, the fortunate expedient was hit upon of making the part of the main tube, upon which the strain of compression was brought, of a series of smaller tubes, or cells of a curved or a rectangular cross-section. The latter form of section was adopted definitively for the main tube, as having yielded the most satisfactory results as to resistance; and also for the smaller tubes, or cells, as most easy of construction and repair.

As a detail of each of these experiments would occupy more space than can be given in this work, that alone of the tube which gave results that led to the forms and dimensions adopted for the tubular bridges subsequently constructed, will be given in this place.

644. Model Tube. The total length of the tube was 78 feet. The distance, or bearing between the points of support on which it was placed to test its strength, was 75 ft. Total depth of the tube at the middle, 4 ft. $6\frac{1}{4}$ in. Depth at each extremity, 4 ft. Breadth, 2 ft. 8 in.

The top of the tube was composed of a top and bottom plate, formed of pieces of sheet iron, abutting end to end, and connected by narrow strips riveted to them over the joints. These plates were 2 ft. $11\frac{1}{2}$ in. wide. They were $6\frac{1}{2}$ in. apart, and connected by two vertical side plates and five interior division plates, with which they were strongly joined by angle irons, riveted to the division plates, and to the top and bottom plates where they joined. Each cell, between two division plates and the top and bottom plates, was nearly 6 in. wide. The sides of the tube were made of plates of sheet iron similarly connected; their depth was 3 ft. $6\frac{3}{4}$ in. A strip of angle iron, bent to a curved shape, and running from the bottom of each end of the tube to the top just below the cellular part, was riveted to each side to give it stiffness. Besides this, precautions were finally taken to stiffen the tube by diagonal braces within it. The bottom of the tube was formed of sheets, abutting end to end, and secured to each other like the top plates; a continuous joint, running the entire length of the tube along the centre line of the bottom, was secured by a continuous strip of iron on the under side, riveted to the plates on each side of the joint. The entire width of the bottom was 2 ft. 11 in.

The sheet iron composing the top cellular portion was 0.147 in. thick; that of the sides 0.099 in. thick. The bottom of the tube at the final experiments, to a distance of 20 ft. on each side of the centre, was composed of two thicknesses of sheet iron, each 0.25 in. thick, the joints being secured by strips above and below them, riveted to the sheets; the remainder, to the end of the tube, was formed of sheets 0.156 in. thick.

The total area of sheets composing the top cellular portion was 24.024 in., that of the bottom plates at the centre portion, 22.450 in.

The general dimensions of the tube were one sixth those of the proposed structure. Its weight at the final experiment, 13,020 lbs.

The experiments, as already stated, were conducted with a view to obtain an equality between the resistances of the parts strained by compression and those extended; with this object, at the end of each experiment, the parts torn asunder at the bottom were replaced by additional pieces of increased strength.

The following table exhibits the results of the final experiments:—

No. of Experiments.	Weight in lbs.	Deflection in inches.
1.....	20,006.....	0.55
2.....	35,776.....	0.78
3.....	48,878.....	1.12
4.....	62,274.....	1.48
5.....	77,534.....	1.78
6.....	92,299.....	2.12
7.....	103,350.....	2.38
8.....	114,660.....	2.70
9.....	132,209.....	3.05
10.....	138,060.....	3.23
11.....	143,742.....	3.40
12.....	148,443.....	3.58
13.....	153,027.....	3.70
14.....	157,728.....	3.78
15.....	161,886.....	3.88
16.....	164,741.....	3.98
17.....	167,614.....	4.10
18.....	171,144.....	4.23
19.....	173,912.....	4.33
20.....	177,088.....	4.47
21.....	180,017.....	4.55
22.....	183,779.....	4.62
23.....	186,477.....	4.72
24.....	189,170.....	4.81
25.....	192,892.....	

The tube broke with the weight in the 25th experiment; the cellular top yielding by puckering at about 2 feet from the point where the weight was applied. The bottom and sides remained uninjured.

The ultimate deflection was 4.89 in.

645. Britannia Tubular Bridge. Nothing further than a succinct description of this marvel of engineering will be attempted here, and only with a view of showing the arrangement of the parts for the attainment of the proposed end.

It differs in its general structure from the model tube, chiefly in having the bottom formed like the top, of rectangular cells, and in the means taken for giving stiffness to the sides.

The total distance spanned by the bridge is 1,489 ft. This is divided into four bays, the two in the centre being each 460 ft., and the one at each end 230 ft. each.

The tube is 1,524 ft. long. Its bearing on the centre pier is 45 ft.; that on the two intermediate 32 ft.; and that on each abutment 17 ft. 6 in. The height of the tube at the centre pier is 30 ft.; at the intermediate piers 27 ft.; and at the ends 23 ft. This gives to the top of the tube the shape of a parabolic curve.

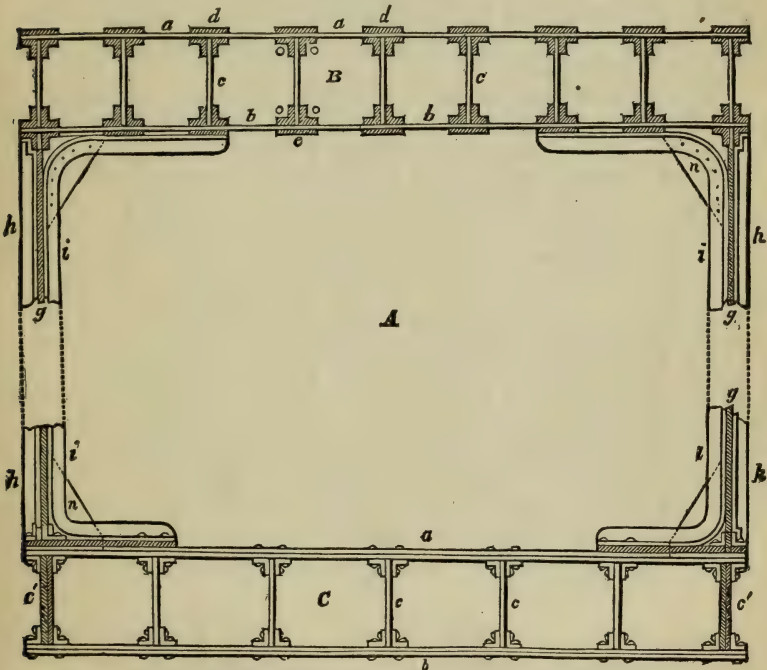


Fig. 188—Represents a vertical cross-section of the Britannia Bridge.

A, interior of bridge.

B, cells of top cellular beam.

C, cells of bottom cellular beam.

a, top plates of top and bottom beams.

b, bottom plates of top and bottom beams.

c, division plates of top and bottom beams.

d and e, strips riveted over the joints of top and bottom plates.

o, angle irons riveted to a, b, and c.

g, plates of sides of the tube A.

h, exterior T irons riveted over vertical joints of g.

i, interior T irons riveted over vertical joints of g, and bent at the angles of A, and extending beyond the second cell of the top beam, and beyond the first of the bottom beam.

n, triangular pieces on each side of i, and riveted to them.

The cellular top (Fig. 188) is divided into eight cells *B*, by division plates *c*, connected with the top *a*, and bottom *b*, by angle irons *o*, riveted to the plates connected. The different sheets composing the plates *a* and *b* abut end to end lengthwise the tube; and the joints are secured by the strips *d* and *e*, riveted to the sheets by rivets that pass through the interior angle irons.

The sheets of which this portion is composed are each 6 ft. long, and 1 ft. 9 in. wide; those at the centre of the tube are $\frac{1\frac{2}{8}}$ ths of an inch thick: they decrease in thickness towards the piers, where they are $\frac{1\frac{0}{8}}$ ths of an inch thick. The division plates are of the same thickness at the centre, and decrease in the same manner towards the piers. The rivets are 1 inch thick, and are placed 3 in. apart from centre to centre. The cells are 1 ft. 9 in. by 1 ft. 9 in., so as to admit a man for painting and repairs.

The cellular bottom is divided into six cells *C*, each of which is 2 ft. 4 in. wide by 1 ft. 9 in. in height. To diminish, as far as practicable, the number of joints, the sheets for the sides of the cells were made 12 ft. long. To give sufficient strength to resist the great tensile strain, the top and bottom plates of this part are composed of two thicknesses of sheet iron, the one layer breaking joint with the other. The joints over the division plates are secured by angle irons *o*, in the same manner as in the cellular top. The joints between the sheets are secured by sheets 2 ft. 8 in. long placed over them, which are fastened by rivets that pass through the triple thickness of sheets at these points. The rivets, for attaining greater strength at these points, are in lines lengthwise of the cell. The sheets forming the top and bottom plates of the cells are $\frac{9}{16}$ ths of an inch at the centre of the tube, and decrease to $\frac{7}{16}$ ths at the ends. The division plates are $\frac{9}{16}$ ths in the middle, and $\frac{8}{16}$ ths at the ends of the tube. The rivets of the top and bottom plates are $1\frac{1}{8}$ in. in diameter.

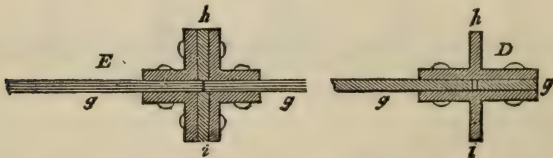


Fig. 189—Represents a horizontal cross-section of the T irons and side plates.
D, cross-section near centre of bridge.
E, cross-section near the piers.
g, plates of the sides.
h, exterior T irons.
i, interior T irons.

The sides of the tube (Fig. 188) between the cellular top and bottom are formed of sheets g , 2 ft. wide; the lengths of which are so arranged that there are alternately three and four plates in each panel, the sheets of each panel abutting end to end, and forming a continuous vertical joint between the adjacent panels. These vertical joints are secured by strips of iron, h and i , of the τ cross-section, placed over each side of the joint, and clamping the sheets of the adjacent panels between them. The τ irons within and without are firmly riveted together with 1-inch rivets, placed at 3 in. between their centres. Over the joints, between the ends of the sheets in each panel, pieces of sheet iron are placed on each side, and connected by rivets. The sheets of the panels at the centre of the tube are $\frac{8}{16}$ ths of an inch thick; they increase to $\frac{10}{16}$ ths to within about 10 ft. of the piers, where their thickness is again increased: and the τ irons are here also increased in thickness, being composed of a strip of thick sheet iron, clamped between strips of angle iron which extend from the top to the bottom of the joints. The object of this increase of thickness, in the panels and τ irons at the piers, is to give sufficient rigidity and strength to resist the crushing strain at these points.

The τ irons on the interior are bent at top and bottom, and extended as far as the third cell from the sides at top, and to the second at bottom. The projecting rib of each in the angles is clamped between two pieces, n , of sheet iron, to which it is secured by rivets, to give greater stiffness at the angles of the tube.

The arrangement of the ordinary τ irons and sheets of the panels is shown in cross-section by D , Fig. 189; and that of the like parts near the piers by E , same Fig.

For the purpose of giving greater stiffness to the bottom, and to secure fastenings for the wooden cross sleepers that support the longitudinal beams on which the rails lie, cross plates of sheet iron, half an inch thick, and 10 in. in depth, are laid on the bottom of the tube, from side to side, at every fourth rib of the τ iron, or 6 ft. apart. These cross plates are secured to the bottom by angle iron, and are riveted also to the τ iron.

The tube is firmly fixed to the central pier, but at the intermediate piers and the abutments it rests upon saddles supported on rollers and balls, to allow of the play from contraction and expansion by changes of temperature.

The following tabular statements give the details of the dimensions, weights, etc., of the Britannia Bridge.

	Feet.	Plates	Angle iron	T iron.	Rivet iron.	Cast- iron.	Total
		tons.	tons.	tons.	tons.	tons.	tons.
Total length of each tube	1524						
“ “ of tubes for each line.....	3048						
Greatest span of bay.....	460						
Height of tubes at the middle	30						
“ “ intermediate piers.....	27						
“ “ ends.....	23						
Extreme width of tubes.....	14 $\frac{3}{4}$						
Number of rivets in one tube.....	882,000						
Computed weight of tube 274 ft. long.....		450	109	70	60		689
“ “ 3 tubes 274 ft. long.....		1350	327	210	180		2067
“ “ 1 tube 472 ft. long.....		965	188	139	108		1400
“ “ 3 tubes 472 ft. long.....		2895	564	417	324		4200
“ “ 1 tube over pier 32 ft. long.....		64	26	10	7		107
“ “ “ “ “ “ “ “ “ “ “ “.....		64	26	10	7		107
Frames and beams.....						2000	2000
Total weight.....		5788	1240	856	686	2000	10,570

646. Formula for reducing the Breaking Weight of Wrought Iron Tubes.

Representing by A , the total area in inches of the cross-section of the metal.

“ “ d , the total depth in inches of the tube.

“ “ l , the length in inches between the points of support.

“ “ C , a constant to be determined by experiment.

“ “ W , the breaking weight in tons.

Then the relations between these elements, in tubes of cylindrical, elliptical and rectangular cross-section, will be expressed by

$$W = C \frac{A d}{l}.$$

The mean value for C for cylindrical tubes, deduced from several experiments, was found to be 13.03; that for elliptical tubes, 15.3; and that for rectangular tubes, 21.5.

647. Victoria Bridge. This bridge is located near Montreal. It is a tubular bridge, a cross-section of which is shown in Fig. 190. It is the largest bridge of its kind in existence. It consists of twenty-four *openings* of 242 feet each, and a central span of 330 feet, and the total length of the tube, including the width of the abutments, is 6,538. The embankment forming the approach at the Montreal end is 1,200 feet long, and at the south end it is 800 feet, making a total length, including the approaches, of nearly 8,000 feet.

The centre span is level, but each side of the centre the bridge falls on a grade of 40 feet per mile.

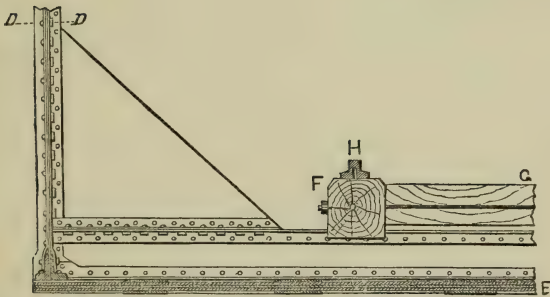
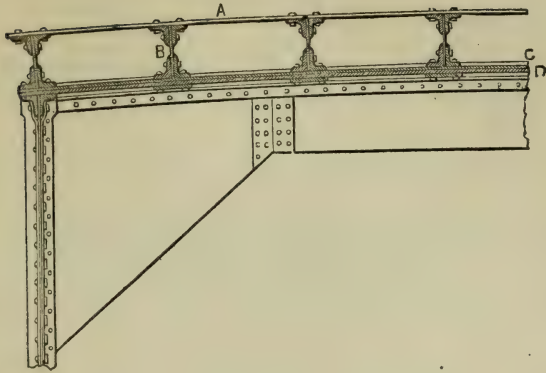


Fig. 190—Victoria Bridge.
 Web plates and top plates at centre of tube.
 A, tie bar 6" x 0".75
 B, web plate.
 C C, cover plates.
 D, top plates.
 E, bottom plates.
 F, heavy wooden beams on which rail H rests.
 G, cross timber to connect beams F.

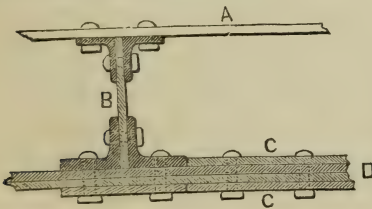


Fig. 190 A—is an enlarged view of a part of one of the upper cells. The letters apply to the same parts as in the preceding Figure.
 A is the top plate.
 D shows two continuous plates, and C C, two joint plates.

Each tube covers two openings, being fixed in the centre, and free to expand or contract on the adjacent piers. They are 16 feet wide and 19 feet deep at their ends, and gradually



Fig. 190 B—Is a section on the line D D of Fig. 190.
K is a vertical side plate.
L L are angle irons which are riveted to the side plates.




Fig. 190 C—Section of the bottom plates E of Fig. 190. There are three continuous plates and four joint plates.

increase in depth to the middle, where they are 16 feet wide by 21 feet 8 inches deep. The total length of each of these double tubes is,

On the centre pier.....	16 feet.
Two openings in the clear.....	484 “
Resting on the east pier.....	8 “
Resting on the west pier.....	8 “
Total.....	516 feet.

The weight of each tube of 516 feet is about 644 tons. At each end are seven expansion rollers, each 6 inches in diameter, upon which the tubes rest. The rollers which are turned rest on planed cast-iron bed plates.

The centre *pier* is 24 feet wide, the remaining ones each 16 feet wide at the top.

The work of laying the foundation was begun in 1854, and the centre tube was put in place in March, 1859.

The scaffolding for the centre tube rested on the ice in the river, which began to move the day after the tube was put in place. From a record which had been kept of the breaking up of the ice, it was presumed that it would remain sound several days longer than it did.

The foundations were made on the solid rock by means of coffer-dams. Two kinds were used, one a floating dam, and the other a permanent crib-work; and each possessed certain advantages over the other which was peculiar to itself and to the objects which were to be accomplished.

VII.

SUSPENSION BRIDGES.

648. The use of flexible materials, as cordage and the like, to form a roadway over chasms and narrow water-courses, dates from a very early period; and structures of this character were probably among the first rude attempts of ingenuity, before the arts of the carpenter and mason were sufficiently advanced to be made subservient to the same ends. The idea of a suspended roadway, in its simplest form, is one that would naturally present itself to the mind, and its consequent construction would demand only obvious means and but little mechanical contrivance; but the step from this stage to the one in which such structures are now found, supposes a very advanced state both of science and of its application to the industrial arts, and we accordingly find that bridge architecture, under every other guise, was brought to a high degree of perfection before the suspension bridge, as this structure is now understood, was attempted.

With the exception of some isolated cases which, but in the material employed, differed little from the first rude structures, no recorded attempt had been made to reduce to systematic rules the means of suspending a roadway now in use, until about the year 1801, when a patent was taken out in this country for the purpose, by Mr. Finlay, in which the manner of hanging the chain supports, and suspending the roadway from it, are specifically laid down, differing, in no very material point, from the practice of the present day in this branch of bridge architecture. Since then, a number of structures of this character have been erected both in the United States and in Europe, and, in some instances, valleys and water-courses have been spanned by them under circumstances which would have baffled the engineer's art in the employment of any other means.

A suspension bridge consists of the supports, termed *piers*, from which the suspension chains are hung; of the anchoring masses, termed the *abutments*, to which the ends of the suspension chains are attached; of the suspension chains, termed the *main chains*, from which the roadway is suspended; of the vertical rods, or chains, termed the *suspending-chains*, etc., which connect the roadway with the main chains; and of the roadway.

649. **Bays.** The natural water-way may be divided into

any number of equal-sized bays, depending on local circumstances, and the comparative cost of high or low piers, and that of the main chains, and the suspending-rods.

A bridge with a single bay of considerable width presents a bolder and more monumental character, and its stability, all other things being equal, is greater, the amplitude from undulations caused by a movable load being less than one of several bays.

650. A chain or rope, when fastened at each extremity to fixed points of support, will, from the action of gravity, assume the form of a catenary in a state of equilibrium, whether the two extremities be on the same or different levels. The relative height of the fixed supports may therefore be made to conform to the locality.

651. The ratio of the versed sine of the arc to its chord, or span, will also depend, for the most part, on local circumstances and the object of the suspended structure. The wider the span, or chord, for the same versed sine, the greater will be the tension along the curve, and the more strength will therefore be required in all the parts of the cable. The reverse will obtain for an increase of versed sine for the same span; but there will be an increase in the length of the curve.

652. The chains may either be attached at the extremities of the curve to the fixed supports, or piers; or they may rest upon them (Figs. 191, 192), being fixed into anchoring masses,




Fig. 191—Represents a chain arch *a b c d e*, resting upon two piers *f f*, and anchored at the points *a* and *e*, from which a horizontal beam *m n* is suspended by vertical chains, or rods.




Fig. 192—Represents the manner in which the system may be arranged when a single pier is placed between the extreme points of the bearing.

or abutments, at some distance beyond the piers. Local circumstances will determine which of the two methods will be the more suitable. The latter is generally adopted, particularly if the piers require to be high, since the strain upon them from the tension might, from the leverage, cause rup-

ture in the pier near the bottom, and because, moreover, it remedies in some degree the inconveniences arising from variations of tension caused either by a movable load or changes of temperature. Piers of wood, or of cast iron, movable around a joint at their base, have been used instead of fixed piers, with the object of remedying the same inconveniences.

653. When the chains pass over the piers and are anchored at some distance beyond them, they may either rest upon saddle-pieces of cast iron, or upon pulleys placed on the piers.

654. The position of the anchoring points will depend upon local circumstances. The two branches of the chain may either make equal angles with the axis of the pier, thus assuming the same curvature on each side of it, or else the extremity of the chain may be anchored at a point nearer to the base of the pier. In the former case the resultant of the tensions and weights will be vertical and in the direction of the axis of the pier, in the latter it will be oblique to the axis, and should pass so far within the base that the material will be secure from crushing. When the cable is secured to a saddle, and the saddle is free to move horizontally on the top of the pier, the resultant forces would still be vertical if there were no frictional resistance to the movement of the saddle. In all cases, whether the inclinations of the cable on the opposite sides of the pier are equal or not, the frictional resistance under the saddle when it is moving will cause a horizontal force tending to overturn the pier.

655. The anchoring points are usually masses of masonry of a suitable form to resist the strain to which they are subjected. They may be placed either above or below the surface of the ground, as the locality may demand. The kind of resistance offered by them to the tension on the chain will depend upon the position of the chain. If the two branches of the chain make equal angles with the axis of the pier, the resistance offered by the abutments will mainly depend upon the strength of the material of which they are formed. If the branches of the chain make unequal angles with the axis of the pier, the branch fixed to the anchoring mass is usually deflected in a vertical direction, and so secured that the weight of the abutment may act in resisting the tension on the chain. In this plan fixed pulleys placed on very firm supports will be required at the point of deflection of the chain to resist the pressure arising from the tension at these points.

Whenever it is practicable the abutment and pier should be

suitably connected to increase the resistance offered by the former.

The connection between the chains and abutments should be so arranged that the parts can be readily examined. The chains at these points are sometimes imbedded in a paste of fat lime to preserve them from oxidation.

656. The chains may be placed either above or below the structure to be supported. The former gives a system of more stability than the latter, owing to the position of the centre of gravity, but it usually requires high piers, and the chain cannot generally be so well arranged as in the latter to subserve the required purposes. The curves may consist of one or more chains. Several are usually preferred to a single one, as for the same amount of metal they offer more resistance, can be more accurately manufactured, are less liable to accidents, and can be more easily put up and replaced than a single chain. The chains of the curve may be placed either side by side, or above each other, according to circumstances.

657. The cables may be formed either of chains, of wire cables, or of bands of hoop iron. Each of these methods has found its respective advocates among engineers. Those who prefer wire cables to chains urge that the latter are more liable to accidents than the former, that their strength is less uniform and less in proportion to their weight than that of wire cables, that iron bars are more liable to contain concealed defects than wire, that the proofs to which chains are subjected may increase without, in all cases, exposing these defects, and that the construction and putting up of chains is more expensive and difficult than for wire cables. The opponents of wire cables state that they are open to the same objections as those urged against chains, that they offer a greater amount of surface to oxidation than the same volume of bar iron would, and that no precaution can prevent the moisture from penetrating into a wire cable and causing rapid oxidation.

That in this, as in all like discussions, an exaggerated degree of importance should have been attached to the objections urged on each side was but natural. Experience, however, derived from existing works, has shown that each method may be applied with safety to structures of the boldest character, and that wherever failures have been met with in either method, they were attributable to those faults of workmanship, or to defects in the material used, which can hardly be anticipated and avoided in any novel application of a like character. Time alone can definitively decide

upon the comparative merits of the two methods, and how far either of them may be used with advantage in the place of structures of more rigid materials.

658. The chains of the curves may be formed of either round, square, or flat bars. Chains of flat bars have been most generally used. These are formed in long links which are connected by short plates and bolts. Each link consists of several bars of the same length, each of which is perforated with a hole at each end to receive the connecting bolts. The bars of each link are placed side by side, and the links are connected by the plates which form a short link, and the bolts.

The links of the portions of the chain which rest upon the piers may either be bent, or else be made shorter than the others to accommodate the chain to the curved form of the surface on which it rests.

659. The vertical suspension bars may be either of round or square bars. They are usually made with one or more articulations, to admit of their yielding with less strain to the bar to any motion of vibration or of oscillation. They may be suspended from the connecting bolts of the links, but the preferable method is to attach them to a suitable saddle-piece which is fitted to the top of the chain and thus distributes the strain upon the bar more uniformly over the bolts and links. The lower end of the bar is suitably arranged to connect it with the part suspended from it.

660. The wire cables are composed of wires laid side by side, which are brought to a cylindrical shape and confined by a spiral wrapping of wire. To form the cable several equal-sized ropes, or yarns, are first made. This may be done by cutting all the wires of the length required for the yarn, or by uniting end to end the requisite number of wires for the yarn, and then winding them around two pieces of wrought or of cast iron, of a horse-shoe shape, with a suitable gorge to receive the wires, which are placed as far asunder as the required length of the yarn. The yarn is firmly attached at its two ends to the iron pieces, or *cruppers*, and the wires are temporarily confined at intermediate points by a spiral lashing of wire. Whichever of the two methods be adopted, great care must be taken to give to every wire of the yarn the same degree of tension by a suitable mechanism. The cable is completed after the yarns are placed upon the piers and secured to the anchoring ropes or chains; for this purpose the temporary lashings of the yarns are undone, and all the yarns are united and brought to a cylindrical shape and secured throughout the extent of the cable, to within a

short distance of each pier, by a continuous spiral lashing of wire.

The part of the cable which rests upon the pier is not bound with wire, but is spread over the saddle-piece with a uniform thickness.

661. The suspension ropes are formed in the same way as the cables; they are usually arranged with a loop at each end, formed around an iron crupper, to connect them with the cables, to which they are attached, and to the parts of the structure suspended from them by suitable saddle-pieces.

662. To secure the cables from oxidation the iron wires are coated with varnish before they are made into yarns, and after the cables are completed they are either coated with the usual paints for securing iron from the effects of moisture, or else covered with some impermeable material.

663. **Piers.** These are commonly masses of masonry in the shape of pillars, or columns, that rest on a common foundation, and are usually connected at the top. The form given to the pier, when of stone, will depend in some respects on the locality. Generally it is that of the architectural monument known as the *Triumphal Arch*; an arched opening being formed in the centre of the mass for the roadway, and sometimes two others of smaller dimensions, on each side of the main one, for approaches to the footpaths of the bridge.

Piers of a columnar, or of an obelisk form, have in some instances been tried. They have generally been found to be wanting in stiffness, being subject to vibrations from the action of the chains upon them, which in turn, from the reciprocal action upon the chains, tends very much to increase the amplitude of the vibrations of the latter. These effects have been observed to be the more sensible as the columnar piers are the higher and more slender.

Cast-iron piers, in the form of columns connected at top by an entablature, have been tried with success, as also have been columnar piers of the same material so arranged, with a joint at their base, that they can receive a pendulous motion at top to accommodate any increase of tension upon either branch of the chain resting on them.

The dimensions of piers will depend upon their height and the strain upon them. When built of stone, the masonry should be very carefully constructed of large blocks well bonded, and tied by metal cramps. The height of the piers will depend mostly on the locality. When of the usual forms, they should at least be high enough to admit the passage of vehicles under the arched way of the road.

664. Abutments. The forms and dimensions of the abutments will depend upon the manner in which they may be connected with the chains. When the locality will admit of the chains being anchored without deflecting them vertically, the abutments may be formed of any heavy mass of rough masonry, which, from its weight, and the manner in which it is imbedded, have sufficient strength to resist the tension in the direction of the chain. If it is found necessary to deflect the chains vertically to secure a good anchoring point, it will also generally be necessary to build a mass of masonry of an arched form at the point where the deflection takes place, which, to present sufficient strength to resist the pressure caused by the resultant of the tension on the two branches of the chain, should be made of heavy blocks of cut stone well bonded. If the abutments are not too far from the foundations of the piers, it will be well to connect the two, in order to give additional resistance to the anchoring points.

665. Main Chains, etc. The suspending curves, or arches, may be made of chains formed of *flat* or *round iron*, or may consist of *wire cables* constructed in the usual manner.

The main chains of the earlier suspension bridges were formed of long links of round iron made in the usual way; but, independently of the greater expense of these chains, they were found to be liable to defects of welding, and the links, when long, were apt to become misshapen under a great strain, and required to be stayed to preserve their form. Chains formed of long links of flat bars, usually connected by shorter ones, as coupling links, have on these accounts superseded those of the ordinary oval-shaped links.

The breadth of the chains has generally been made uniform, but in some bridges erected in England by Mr. Dredge, the chains are made to increase uniformly in breadth, by increasing the number of bars in a link, from the centre to the points of suspension. In addition to this change in the form of the main chains, Mr. Dredge places the suspending chains in a vertical plane parallel to the axis of the bridge, but obliquely to the horizon, inclining each way from the points of suspension towards the centre of the curve. This system has never come into general use. At the present day nearly all cables of suspension bridges are made of wire.

Some of the links of the main chains should be arranged with adjusting screws, or with keys, to bring the chains to the proper degree of curvature when set up.

The chains may either be attached to, or pass over a movable cast-iron saddle, seated on rollers on the top of the piers,

so that it will allow of sufficient horizontal displacement to permit the chains to accommodate themselves to the effects of a movable load on the roadway. The same ends may be attained by attaching the chains to a pendulum bar suspended from the top of the pier.

The chains are firmly connected with the abutments, by being attached to anchoring masses of cast iron, arranged in a suitable manner to receive and secure the ends of the chains, which are carefully imbedded in the masonry of the abutments. These points, when under ground, should be so placed that they can be visited and examined from time to time.

666. Suspending-Chains. The suspending-rods, or chains, should be attached to such points of the main chains and the roadway-bearers, as to distribute the load uniformly over the main chains, and to prevent their being broken or twisted off by the oscillations of the bridge from winds, or movable loads. They should be connected by suitably-arranged articulations, with a saddle piece bearing upon the back of the main chain, and at bottom with the stirrup that embraces the roadway-bearers.

The suspending-chains are usually hung vertically. In some recent bridges they have been inclined inward to give more stiffness to the system.

667. Roadway. Transversal roadway-bearers are attached to the suspending-chains, upon which a flooring of timber is laid for the roadway. The roadway-bearers, in some instances, have been made of wrought iron, but timber is now generally preferred for these pieces. Diagonal ties of wrought iron are placed horizontally between the roadway-bearers to brace the frame-work.

The parapet may be formed in the usual style either of wrought iron, or of timber, or of a combination of cast iron and timber. Timber alone, or in combination with cast iron, is now preferred for the parapets; as observation has shown that the stiffness given to the roadway by a strongly-trussed timber parapet limits the amplitude of the undulations caused by violent winds, and secures the structure from danger.

In some of the more recent suspension bridges, a trussed frame, similar to the parapet, has been continued below the level of the roadway, for the purpose of giving greater security to the structure against the action of high winds.

When the roadway is above the chains, any requisite number of single chains may be placed for its support. Frames formed of vertical beams of timber, or of columns of cast

iron united by diagonal braces, rest upon the chains, and support the roadway-bearers placed either transversely or longitudinally.

668. Vibrations. The undulatory or vibratory motions of suspension bridges, caused by the action of high winds, or movable loads, should be reduced to the smallest practicable amount, by a suitable arrangement of bracing for the roadway-timbers and parapet, and by chain-stays attached to the roadway and to the basements of the piers, or to fixed points on the banks whenever they can be obtained.

Calculation and experience show that the vibrations caused by a movable load decrease in amplitude as the span increases, and, for the same span, as the versed sine decreases. The heavier the roadway, also, all other things being the same, the smaller will be the amplitude of the vibrations caused by a movable load, and the less will be their effect in changing the form of the bridge.

The vibrations caused by a movable load seldom affect the bridge in a hurtful degree, owing to the elasticity of the system, unless they recur periodically, as in the passage of a body of soldiers with a cadenced march. Serious accidents have been occasioned in this way; also by the passage of cattle, and by the sudden rush of a crowd from one side of the bridge to the other. Injuries of this character can only be guarded against by a proper system of police regulations.

Chain-stays may either be attached to some point of the roadway and to fixed points beneath it, or else they may be in the form of a reversed curve below the roadway. The former is the more efficacious, but it causes the bridge to bend in a disagreeable manner at the point where the stay is attached, when the action of a movable load causes the main chains to rise. The more oblique the stays, the longer, more expensive, and less effective they become. Stays in the form of a reversed curve preserve better the shape of the roadway under the action of a movable load, but they are less effective in preventing vibrations than the simple stay. Neither of these methods is very serviceable, except in narrow spans. In wide spans, variations of temperature cause considerable changes in the length of the stays, which makes them act unequally upon the roadway; this is particularly the case with the reversed curve. Both kinds should be arranged with adjusting screws, to accommodate their length to the more extreme variations of temperature.

Engineers at present generally agree that the most efficacious means of limiting the amplitude, and the consequent

injurious effects of undulations, consists in a strong combination of the roadway-timbers and flooring, stiffened by a trussed parapet of timber above the roadway, and in some cases in extending the framework of the parapet below it. These combinations present, in appearance and reality, two or more open-built beams, as circumstances may demand, placed parallel to each other, and strongly connected and braced by the framework of the roadway, which are supported at intermediate points by the suspending-rods or chains. The method of placing the roadway-framing at the central line of the open-built beams, presents the advantage of introducing vertical diagonal braces, or ties, between the beams beneath the roadway-frame. The main objections to these combinations is the increased tension thrown upon the chains from the greater weight of the framework. This increase of tension, however, provided it be kept within proper limits, so far from being injurious, adds to the stability and security of the bridge, both from the effects of undulations and of vibrations from shocks.

As a farther security to the stability of the structure, the framework of the roadway should be firmly attached at the two extremities to the basements of the piers.

669. Preservative Means. To preserve the chains from oxidation on the surface, and from rain or dews which may lodge in the articulations, they should receive several coats of minium, or of some other preparation impervious to water, and this should be renewed from time to time, and the forms of all the parts should be the most suitable to allow the free escape of moisture.

Wires for cables can be preserved from oxidation, until they are made into ropes, by keeping them immersed in some alkaline solution. Before making them into ropes, they should be dipped several times in boiling linseed oil, prepared by previously boiling it with a small portion of litharge and lampblack. The cables should receive a thick coating of the same preparation before they are put up, and finally be painted with white-lead paint, both as a preservative means, and to show any incipient oxidation, as the rust will be detected by its discoloring the paint.

670. Proofs of Suspension Bridges. From the many grave accidents, accompanied by serious loss of life, which have taken place in suspension bridges, it is highly desirable that some trial-proof should be made before opening such bridges to the public, and that, moreover, strict police regulations should be adopted and enforced, with respect to them,

to guard against the recurrence of such disasters as have several times taken place in England, from the assemblage of a crowd upon the bridge. In France, and on the continent generally, where one of the important duties of the public police is to watch over the safety of life, under such circumstances, regulations of this character are rigidly enforced. The trial-proof enacted in France for suspension bridges, before they are thrown open for travel, is about 40 lbs. to each superficial foot of roadway in addition to the permanent weight of the bridge. This proof is at first reduced to one-half, in order not to injure the masonry of the points of support during the green condition of the mortar. It is made by distributing over the road surface any convenient weighty material, as bricks, pigs of iron, bags of earth, etc. Besides this after-trial, each element of the main chains should be subjected to a special proof to prevent the introduction of unsound parts into the system. This precaution will not be necessary for the wire of a cable, as the process of drawing alone is a good test. Some of the coils tested will be a guarantee for the whole.

From experiments made at Geneva, by Colonel Dufour, one of the earliest and most successful constructors of suspension bridges on the Continent, it appears that wrought bar iron can sustain, without danger of rupture, a shock arising from a weight of 44 lbs., raised to a height of 3.28 feet on each, .0015dths of an inch of cross-section, when the bar is strained by a weight equal to one-third of its breaking weight; and he concludes that no apprehension need be entertained of injury to a bridge from shocks caused by the ordinary transit upon it, which has been subjected to the usual trial of a dead weight; and that the safety, in this respect, is the greater as the bridge is longer, since the elasticity of the system is the best preservative from accidents due to such causes. Mr. Whoeler, an engineer in Germany, concluded, after a long series of carefully conducted experiments, that good wrought iron would sustain any number of continuous shocks, provided that it was in no case strained more than 10,000 pounds per square inch of section.

671. Durability. Time is the true test of the durability of the structures under consideration. So far as experience goes there seems to be no reason to assign less durability to suspension than to cast-iron or even stone bridges, if their repairs and the proper means of preserving them from decay are attended to. Doubts have been expressed as to the durability of wire cables, but these seem to have been set at rest

by the trials and examinations to which a bridge of this kind, erected by Colonel Dufour, at Geneva, was subjected by him after twenty years' service. It was found that the undulations were greater than when the bridge was first erected, owing to the shrinking of the roadway-frame; but the main cables, and suspending-ropes, even at the loops in contact with the timber, proved to be as sound as when first put up, and free from oxidation; and the whole bridge stood another very severe proof without injury.

The following succinct descriptions of the principal elements of some of the most celebrated suspension bridges of chains, and wire cables, of remarkable span, are taken from various published accounts.

672. Bridge over the Tweed near Berwick. This is the first large suspension bridge erected in Great Britain. It was constructed upon the plans of *Capt. Brown*, who took out a patent for the principles of its construction.

Span..... 449 feet.

Versed sine..... 30 "

Number of main-chains 12, six being placed on each side of the roadway, in three ranges of two chains each, above each other.

The chains are composed of long links of round iron, 2 inches in diameter, and are 15 feet long. They are connected by coupling-links of round iron, $1\frac{1}{8}$ inch diameter, and about 7 inches long, by means of coupling bolts.

The roadway is borne by suspending-rods of round iron, which are attached alternately to the three ranges of chains. The roadway-bearers are of timber, and are laid upon longitudinal bars of wrought iron, which are attached to the suspension-rods.

673. Menai Bridge, erected after the designs of *Mr. Telford*. Opened in 1826.

Span..... 579.8 feet.

Versed sine..... 43 "

Number of main-chains 16, arranged in sets of 4 each, vertically above each other.

Number of bars in each link, 5.

Length of links, 10 feet.

Breadth of each bar, $3\frac{1}{4}$ inches; depth, 1 inch.

Coupling-links, 16 inches long, 8 inches broad, and 1 inch deep.

Coupling-bolts, 3 inches in diameter.

Total area of cross-section of the main-chain, 260 square inches.

The main-chains are fastened to their abutments by anchoring-bolts 9 feet long and 6 inches in diameter, which are secured in cast-iron grooves. The abutments, which are underground, and reached by suitable tunnels, are the solid rock.

Upon the tops of the piers are cast-iron saddles, upon which the main-chains rest. The base of the saddle, which is fitted with grooves to receive them, rests upon iron rollers placed on a convex cylindrical bed of cast iron, shaped like the bottom of the base of the saddle, to admit of a slight displacement of the chains from movable loads or changes of temperature.

The roadway is divided into two carriage-ways, each 12 feet wide, and a footpath 4 feet wide between them. The roadway-framing consists of 444 wrought-iron roadway-bearers, $3\frac{1}{2}$ inches deep and $\frac{1}{2}$ inch thick, which are supported at the centre points of each of the carriage-ways by an inverted truss, consisting of two bent iron ties which support a vertical bar placed under the roadway-bars at the points just mentioned. The platform of the roadway is formed of two thicknesses of plank. The first, 3 inches thick, is laid on the roadway-bearers and fastened to them. This is covered by a coating of patent felt soaked in boiling tar. The second is two inches thick and spiked to the first.

The roadway is suspended by articulated rods attached to stirrups on the roadway-bearers and to the coupling-bolts of the main-chains.

The piers are 152 feet high above the high-water level. They have an arched opening leading to the roadway, and the masses on the sides of the arch are built hollow, with a cross-tie partition wall between the exterior main walls.

The parapet is of wrought-iron vertical and parallel bars connected by a network.

This bridge was seriously injured by a violent gale, which gave so great an oscillation to the main-chains that they were dashed against each other, and the rivet-heads of the bolts were broken off. To provide against similar accidents, a framework of cast-iron tubes, connected by diagonal pieces, was fastened at intervals between the main-chains, by cross-ties of wrought-iron rods, which passed through the tubes, and were firmly connected with the exterior chains. Subsequently to this addition, a number of strong timber roadway-bearers were fastened at intervals to those of iron, as the iron roadway-bearers were found to have been bent, and in some instances broken, by the undulatory motion of the bridge in heavy gales.

The total suspending weight of this bridge, including the main-chains, roadway, and all accessories, is stated at 643 tons $15\frac{1}{2}$ cwt.

674. The **Fribourg Bridge** of wire thrown across the valley of the Sarine, opposite Fribourg, was erected in 1832, by *M. Chaley*, a French engineer.

Span.....	870.32 feet.
Versed sine.....	63.26 “

There are 4 main cables, 2 on each side of the road, of the same elevation, and about $1\frac{1}{2}$ inch asunder. Each cable is composed of 1056 wires, each about 0.118 inch in diameter, which are firmly connected and brought to cylindrical shape by a spiral wire wrapping. The diameter of the cable varies from 5 to $5\frac{1}{2}$ inches. The cables pass over 3 fixed pulleys on the top of the piers, upon which they are spread out without ligatures, and are each attached to two other cables of half their diameter, which are anchored at some distance from the piers, in vertical pits, passing over a fixed pulley where they enter the mouth of the pit.

The suspending-ropes are of wire a size smaller than that used for the cables. Their diameter is nearly one inch. They are formed with a loop at each end, fastened around a crupper-shaped piece of cast iron, that forms an eye to connect the rope with the hook of the stirrup affixed to the roadway-bearers, and to a saddle-piece of wrought iron, for each rope, that rests on the two main cables.

The roadway-bearers are of timber, being deeper in the centre than at the two ends, the top surface being curved to conform to a slight transverse curvature given to the surface of the carriage-way; they are placed about 5 feet between their centre lines, every fourth one projecting about 3 feet beyond the ends of the others, to receive an oblique wrought-iron stay to maintain the parapet in its vertical position. The carriage-way, which is about $15\frac{1}{2}$ feet wide, is formed of two thicknesses of plank. The foot-paths, which are 6 feet wide, are raised above the surface of the carriage-way, and rest upon longitudinal beams of large dimensions, the inner one of which is firmly secured to the roadway-bearers by stirrups which embrace them, and the exterior one is fastened to the same pieces by long screw-bolts, which pass through the top rail of the parapet. The roadway has a slight curvature from the centre to the two extremities, along the axis, the centre point being from 18 inches to about 3 feet higher than the ends, according to the variations of temperature. The main

cables at the centre are brought down nearly in contact with the roadway-timbers.

The parapet is an open-built beam, consisting of a top rail, the bottom rail being the longitudinal exterior beam of the footpath, and of diagonal pieces which are mortised into the two rails; the whole being secured by the iron bolts that pass through the roadway-bearers and the top rail. This combination of the parapet with the inclination towards the axis of the roadway given to the suspending-ropes, gives great stiffness to the roadway and counteracts both lateral oscillations and longitudinal undulations.

The piers consist of two pillars of solid masonry, about 66 feet high above the level of the roadway, which are united, at about 33 feet above the same level, by a full centre arch, having a span of nearly 20 feet, and which forms the top of the gateway leading to the bridge.

675. Hungerford and Lambeth Bridge, erected over the Thames, upon the plans of Mr. Brunel.

This bridge, designed for foot-passengers only, has the widest span of any chain bridge erected up to this period.

Span.....	676½ feet.
Versed sine.....	50 “

The main chains are 4 in number, two being placed on each side of the bridge, one above the other. These chains are formed entirely of long links of flat bars; the links near the centre of the curve having alternately ten and eleven bars in each, and those near the piers alternately eleven and twelve bars. The bars are 24 feet long, 7 inches in depth, and 1 inch thick. They are connected by coupling-bolts, $4\frac{5}{8}$ inches in diameter, which are secured at each end by cast-iron nuts, 8 inches in diameter, and $2\frac{3}{4}$ inches thick. The extremity of each chain is connected with a cast-iron saddle-piece, by bolts which pass through the vertical ribs of the saddle-piece, of which there are 15. The bottom of the saddle rests on 50 friction-rollers, which are laid on a firm horizontal bed of cast-iron. The saddle can move 18 inches horizontally, either way from the centre, and thus compensate for any inequality of strain on the main chains, either from a load, or from variations of temperature.

The side main-chains are attached in like manner to the saddle, and anchored at the other extremity in an abutment of brickwork. The anchorage (Fig. 193) is arranged by passing the chains through a strong cast-iron plate, and securing the ends of the bars by keys. The anchoring-plate is retained in

its place by two strong cast-iron beams, against which the strain upon the plate is thrown.

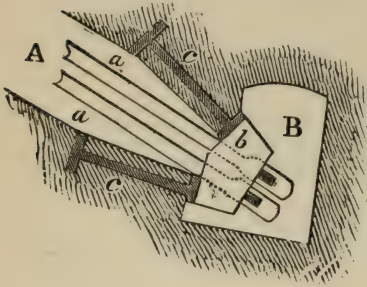


Fig. 193—Shows the manner in which the side main-chains are anchored.

A, inclined shaft for the chains leading to the arched chamber B of the anchorage.

a, a, two main-chains, passed through the cast-iron holding-plate b and fastened behind it by keys.

c, c, cross sections of the cast-iron girders which retain b.

The suspending-rods (Fig. 194) are connected with both the

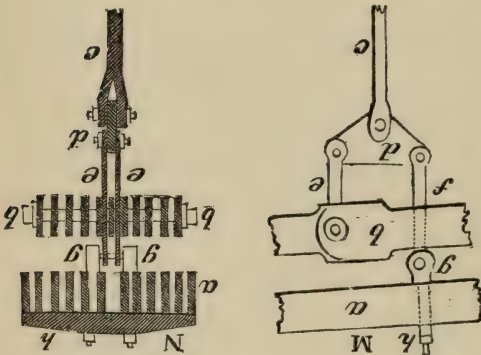


Fig. 194—Shows an elevation M and cross section N of the connection between the main-chains and suspending-rods.

a, a, upper main-chain.

b, b, joint of lower main-chain.

c, suspending-rod with a forked head to receive the plate a, hung by stirrup-straps e and f, respectively, to the coupling-bolt of the links and to the two bolts g, fastened to the saddle h on top of the upper main-chain.

upper and lower main-chains ; to the upper by a saddle-piece and bolts, and to the coupling-bolt of the lower by an arrangement of articulations, which allows an easy play to the rods ; at the bottom (Fig. 195) they are connected by a joint with a bolt that fastens firmly the roadway-timbers.

The roadway-timbers consist of a strong longitudinal bottom beam, upon which the roadway-bearers are notched ; these last pieces are in pairs, the two being so far apart that the bolts connecting with the suspending-rods by a forked head can pass between them ; the flooring-plank is laid upon the roadway-bearers ; and a top longitudinal beam, which forms the bottom rail of the parapet, is secured to the bottom beam by the connecting bolt. Wrought-iron diagonal ties are placed horizon-

tally below the flooring, to brace the whole of the timbers beneath.




Fig. 195—Shows an elevation of the roadway-timbers.
a, bottom longitudinal beam.
b, b, roadway-bearers in pairs.
c, platform.
d, top longitudinal beam forming the bottom rail of the parapet.
e, bolt, with a forked head to receive the end of the suspending-rod, which is keyed beneath and secures the beams, etc.
g, g, wrought-iron horizontal diagonal ties.

The roadway is 14 feet wide. It slopes from the centre point along the axis to the extremities, being 4 feet higher in the centre than at the two last points.

The piers are in the form of towers, resembling the Italian belfry. They are of brick, 80 feet high, and so constructed and combined with the top saddles, that they have to sustain no other strain than the vertical pressure from the main-chains.

The whole weight of the structure, with an additional load of 100 lbs. per square foot of the roadway, would throw about 1,000 tons on each pier. The tension on the chains from this load is calculated at about 1,480 tons; while the strain which they can bear without impairing their strength is about 5,000 tons.

676. Monongahela Wire Bridge. This bridge, erected at Pittsburgh, Penn., upon plans, and under the superintendence of the late Mr. Roebling, has 8 bays, varying between 188 and 190 feet in width. It is one of the more recent of these structures in the United States.

The roadway of each bay is supported by two wire cables, of $4\frac{1}{2}$ inches in diameter, and by diagonal stays of wire rope, attached to the same point of suspension as the cables, and connecting with different points of the roadway-timbers. The ends of the cables of each bay are attached to pendulum-bars, by means of two oblique arms, which are united by joints to the pendulum-bars. These bars are suspended from the top of 4 cast-iron columns, inclining inwards at top, which are there firmly united to each other; and, at bottom, anchored to the top of a stone pier built up to the level of the roadway timbers. The side columns of each frame are connected throughout by an open lozenge-work of cast

iron. The front columns have a like connection, leaving a sufficient height of passage-way for foot-passengers.

The framework of 4 columns on each side is firmly connected at the top by cast-iron beams, in the form of an entablature. A carriage-way is left between the two frames, and a footpath between the two columns forming the fronts of each frame.

The points of suspension of the cables are over the centre line of the footpaths; and the cables are inclined so far inward that the centre point of the curve is attached just outside of the carriage-way. The suspending-ropes have a like inward inclination, the object in both cases being to add stiffness to the system, and diminish lateral oscillations.

The roadway consists of a carriage-way 22 feet wide, and two footpaths each 5 feet wide. The roadway-bearers are transversal beams in pairs, 35 feet long, 15 inches deep, and $4\frac{1}{2}$ inches wide. They are attached to the suspending-ropes. The flooring consists of $2\frac{1}{2}$ -inch plank, laid longitudinally over the entire roadway-surface; and of a second thickness of $2\frac{1}{2}$ -inch oak plank laid transversely over the carriage-way.

The parapet, which is on the principle of Town's lattice, extends so far below the roadway-bearers that they rest and are notched on the lowest chord of the lattice. A second chord embraces them on top, and finally a third chord completes the lattice at the top. The object of adopting this form of parapet was to increase the resistance of the roadway to undulations.

677. Niagara Railroad and Highway Suspension Bridge.

This remarkable structure, like the Aqueduct suspension bridge at Pittsburgh, was constructed by Roebling; and for boldness of plan, and skill in the execution of its details, is every way worthy of the professional ability of this distinguished engineer.

Designed to afford a passage-way over the Niagara river, both for railroad and common road traffic, it consists essentially of two platforms (Fig. 196), one above the other, and about fifteen feet apart; the upper serving as the railroad track, and the lower for ordinary vehicles; the two being connected by a lattice girder on each side; and the whole bridge-frame being suspended from four main wire cables, two of which are connected with the upper platform, and two with the lower, by suspension-rods and wire ropes attached to the roadway-bearers, or joists of the platforms.

Each platform consists of a series of roadway-bearers in pairs; the lower covered by two thicknesses of flooring-plank,

the upper by one thickness; the portion of the latter immediately under the railroad track having a thickness of four inches, and the remainder on each side but two inches.

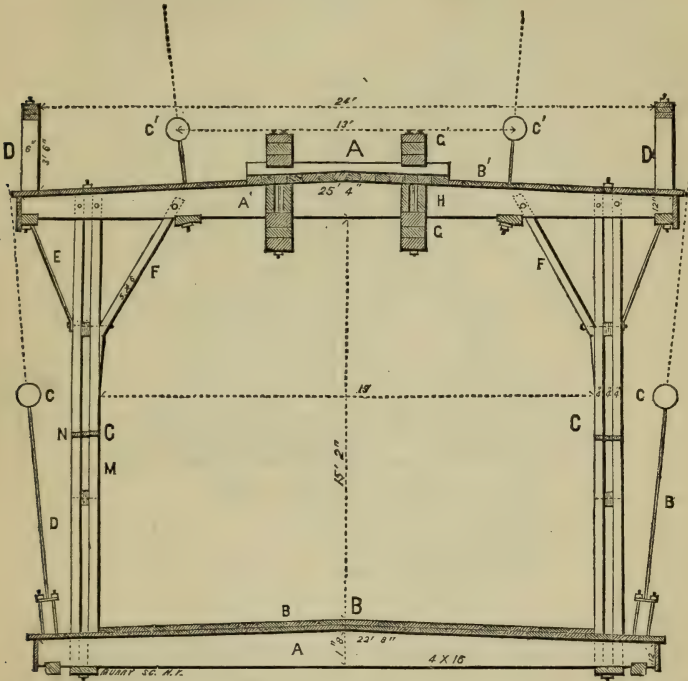


Fig. 196—Cross section of Niagara Bridge.

- | | |
|------------------------------------|---|
| A, railway track and beams. | C, lower main cables. |
| B, lower platform for common road. | C', upper main cables. |
| C, Diagonal truss. | D, suspension ropes. |
| D, parapet. | E, wrought-iron braces. |
| A, lower roadway bearers. | F, wooden braces. |
| A', upper roadway bearers. | G, beams of longitudinal railway bearers. |
| B, lower flooring. | H, longitudinal braces between roadway bearers. |
| B', upper flooring. | N, horizontal rail between posts. |

The lattice-girders consist of vertical posts in pairs, the ends of which are clamped between the roadway-bearers; and of diagonal wrought-iron rods with screws at each end, which pass through cast-iron plates fastened above the roadway-bearers of the upper platform, and below those of the lower, and are brought to a proper bearing by nuts on each end. A horizontal rail of timber is placed between the posts of the lattice at their middle points to prevent flexure.

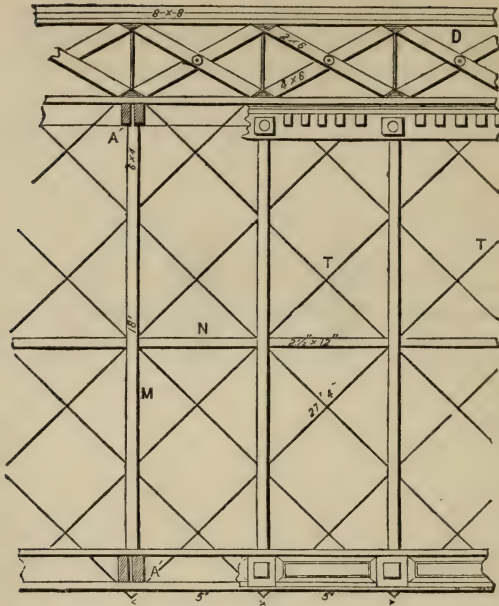


Fig. 197.—Side elevation of Niagara Bridge.
 A', A', ends of roadway bearers.
 D, parapet.
 M, posts in pairs.
 N, rail between posts.
 T, diagonal iron brace rods.

The roadway-bearers and flooring of the upper platform are solidly clamped between four solid built beams or girders; two above the flooring, which rest on cross supports; and two, corresponding to those above, below the roadway-bearers; the upper and lower corresponding beams, with longitudinal braces in pairs between the roadway-bearers and resting on the lower beams, being firmly connected by screw-bolts. The rails are laid upon the top beams.

A strong parapet, on the plan of Howe's truss, is placed on each side of the upper platform.

Wrought-iron and wooden braces connect the posts and the two platforms.

The piers (Fig. 198) consist of four obelisk-shaped pillars, which are sixty feet high; the base of each being a square of fifteen feet sides; and the top one of eight feet sides. The pedestal of each pillar is a square of about seventeen feet side at top, and having a batir of one foot vertically to one horizontally, or $\frac{1}{12}$, on each of its faces. The height of the

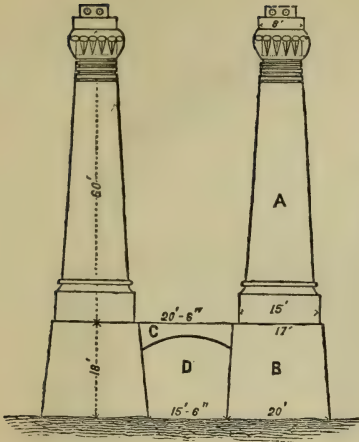


Fig. 198—End elevation of piers and connecting arch of bridge.

- A, shaft of the pier.
 B, pedestal.
 C, connecting arch.
 D, arched way for common road.

pedestals on the United States side of the river being twenty-eight feet, and on the Canadian side eighteen feet. An archway below the level of the railroad connects the two pedestals.

The main cables pass over saddles placed on rollers, on the tops of the piers, and they are fastened at their ends (Fig. 199) to chains formed of links of wrought-iron bars, which, passing through abutments of masonry, and down into shafts made into the solid rock below, are there each firmly attached to an anchoring-plate of cast iron.

Besides the usual suspending-rods of the bridge, a number of wire ropes, termed *over-floor stays*, connect the portions of the upper platform adjacent to the piers with the saddles at the top of the piers; and the lower platform is in like manner connected with the rocky banks of the river by a number of like stays. The object of both being to resist the action of high winds upon the platform, and to give the bridge more rigidity.

Each of the main cables is formed of seven smaller ones or *strands*. The whole bound together in the usual manner by a wire wrapping. Each strand contains 520 wires in its cross-section, sixty of which make an area of one square inch.

The main cables to which the roadway-bearers of the upper platform are attached are deflected laterally towards the axis of the bridge, and thus limit the range of lateral oscillations. This provision, the lattice structure of the sides and the parapet, the over and under floor stays, the deep longitudinal girders of the railway track, the slight camber or longi-

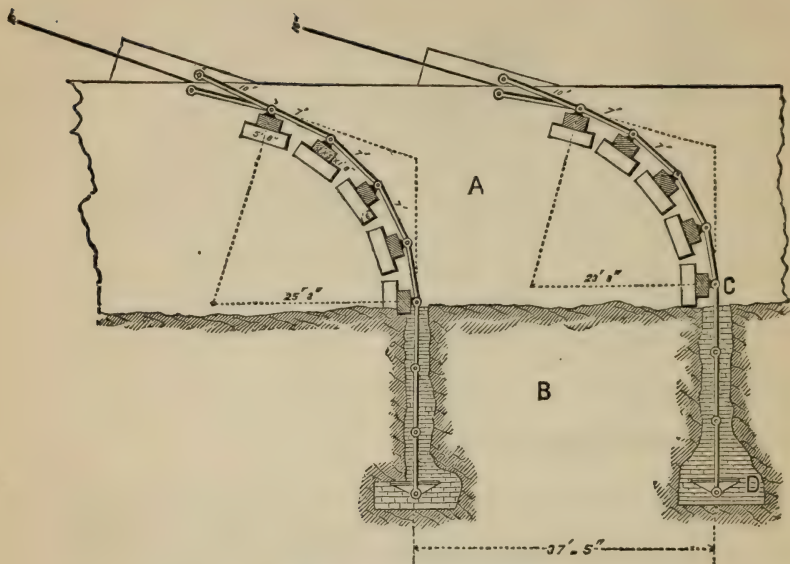


Fig. 199—Side view of anchor-chain.
 A, masonry of buttress.
 B, natural rock bed.
 C, shaft and masonry for chains.
 D, anchoring-plate.

tudinal curvature from the ends of the bridge to the centre, and its own weight, give to the whole structure that degree of rigidity and stability which are its marked characteristics, as contrasted with suspension bridges usually.

Some of the principal dimensions of the means of suspension are given in the following statement :

Span of both cables between axis of piers, $821\frac{1}{2}$ feet.

Versed sine of cables of lower platform, 64 feet.

Versed sine of cables of upper platform, 54 feet.

Diameter of each cable, 10 inches.

Area of cross-section of each cable, 60.4 square inches.

Area of cross-section of upper links of anchor-chains, 372 square inches.

Ultimate strength of anchor-chains, 11,904 tons.

Number of wires in the four cables, 14,560.

Average strength of one wire, 1,648 lbs.

Ultimate strength of the four cables, 12,000 tons.

Permanent weight borne by the cables, 1,000 tons.

Length of anchor-chains, 66 feet.

Length of upper cables, 1,261 feet.

Length of lower cables, 1,193 feet.

Number of suspenders, 624.

Number of over-floor stays, 64.

Number of under-floor stays, 56.

Length of platforms between piers, 800 feet.

Height of railway track above middle stage of water, 245 feet.

678. East River Bridge. The East River Bridge, which is now in process of erection, will, when completed, be the longest span suspension bridge which has been erected up to this date. It will form a suspended highway connecting New York and Brooklyn cities. The terminus in New York city will be opposite City Hall, in Chatham street; and in Brooklyn in the square bounded by Fulton, Sands, Washington, and Prospect streets. Its total length will be 5,989 feet. The central span will cross the river without impeding navigation, in a single span of 1,595 feet 6 inches from centre to centre of tower.

On each side of the central opening on the land sides there will be spans supported by the land cables of 930 feet each. The remaining distances, which form the approaches, will be supported by iron girders and trusses, and will rest at short intervals upon small piers of masonry or iron columns, located within the blocks of buildings which will be crossed and occupied. These pillars will form part of the walls needed for the division of the occupied ground into stores, dwellings, or offices.

The grade from the New York terminus to the centre of the bridge will be three feet and three inches per hundred feet, and the same on the Brooklyn side from the centre of the bridge to the anchorage, but the grade of the Brooklyn approach will be two feet and nine inches per hundred feet.

The floor of the bridge will be 85 feet in width from out to out. The floor is divided into five spaces by six lines of iron trusses. The outer spaces will be in the clear eighteen feet each, and will accommodate each two lines of iron tramways for ordinary vehicle travel, as well as for street cars, drawn singly by horses, or in pairs by light dummies. The next two spaces will be thirteen feet two inches wide each, provided with an iron track for running of two passenger trains back and forward alternately. These trains will be attached to an endless wire rope, propelled by a stationary engine, which will be located on the Brooklyn side, underneath the floor, the two tracks being operated like an inclined plane,

with a speed of twenty miles per hour, the whole transit occupying only five minutes from terminus to terminus.

The central or fifth division of the bridge floor will form a promenade for foot travel, fifteen feet in width. It will be elevated five feet above the roadway, affording a view over both sides of the bridge.

The roadway will pass the towers at an elevation of 119 feet, and the centre of the main span will be 135 feet above mean high tide, or 140 feet above mean low water.

The width of the roadway, from outside to outside, will be 85 feet.

The bridge will be supported by four main cables, each 16 inches in diameter, composed of galvanized tempered cast-steel wire, No. 6 gauge, having a strength of 160 pounds per square inch of section. There will also be 104 stays to aid the cables.

The total weight of the structure, including the cables, is estimated to be 5,000 tons.

This grand structure was devised, and works superintended till his death, by the late John A. Roebling. It is now engineered by his son Col. W. A. Roebling.

VIII.

MOVABLE BRIDGES.

679. The term *movable bridge* is commonly applied to a platform supported by a framework of timber or of cast iron, by means of which a communication can be formed or interrupted at pleasure between any two points of a fixed bridge, or over any narrow water-way. These bridges are generally denominated *draw-bridges*, but this term is now, for the most part, confined to those movable bridges which can be raised or lowered by means of a horizontal axis, placed either at one extremity of the platform, or at some intermediate point between the two ends, and a counterpoise which is so connected with the platform in either case, that the bridge can be easily manœuvred by a small power acting through the intermedium of some suitable mechanism applied to the counterpoise. The term *turning* or *swinging bridge* is used when the bridge is arranged to turn horizontally around a vertical axis placed at a point between its two ends, so that the parts on each side of the axis balance each other; and the term *rolling bridge* is applied when the bridge,

resting upon rollers, can be shoved forward or backward horizontally, to open or interrupt the passage.

To the above may be added another class of movable bridges used for the same purpose, which consist of a platform supported by a boat, or other buoyant body, which can be placed in or withdrawn from the water-way as circumstances may require.

680. Draw-Bridges. When the horizontal axis of this description of bridge is placed at the extremity of the platform, the bridge is manoeuvred by attaching a chain to the other extremity, which is connected with a counterpoise and a suitable mechanism, by which the slight additional power required for raising the bridge can be applied.

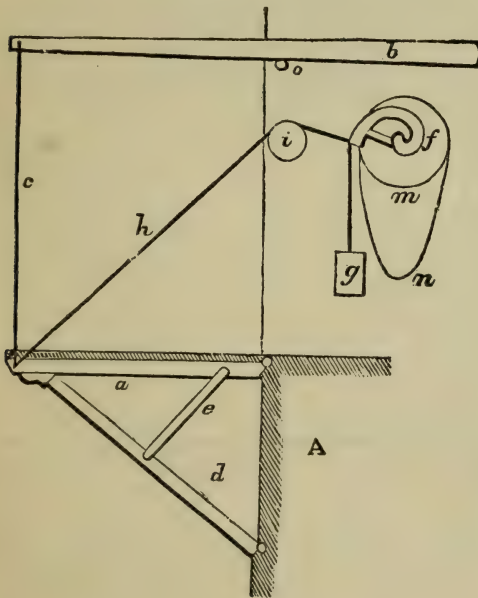


Fig. 200—Shows the manner of manoeuvring a draw-bridge either by a framed lever, or by a counterpoise suspended from a spiral eccentric.

- A, abutment.
- a, section of the platform.
- b, framed lever.
- c, chain attached to the ends of the lever and the platform.
- d, strut movable around its lower end.
- e, bar with an articulation at each end that confines the strut to the platform.
- f, spiral eccentric connected with the counterpoise g by a chain passing over the gorge of the eccentric.
- h, chain for raising the bridge, one end of which is attached to the extremity of the platform, and the other to the axle of the eccentric.
- i, fixed pulley over which the chain h is passed.
- m, wheel fixed to the axle of the eccentric for the purpose of turning it by means of animal power applied to the endless chain n.

A number of ingenious contrivances have been put in practice for these purposes. They consist usually either of a counterpoise of invariable weight, connected with additional animal motive-power, which acts with constant intensity, but with a variable arm of lever; or of a counterpoise of variable weight, which is assisted by animal motive-power acting with an invariable arm of lever. In some cases the bridge is worked with a less complicated combination, by dispensing

with a counterpoise, and applying animal motive-power, of variable intensity, acting with a constant or a variable arm of lever.

Among the combinations of the first kind the most simple consists in placing a framed lever (Fig. 200) revolving on a horizontal axis above the platform. The anterior part of the frame is connected with the movable extremity of the platform by two chains. The posterior portion, which forms the counterpoise, has chains attached to it by which the lever can be worked by men.

When the locality does not admit of this arrangement, the chain attached to the movable end of the platform may be connected with a horizontal axle above the platform, to which is also attached a fixed eccentric of a spiral shape (Fig. 200), connected with a chain that passes over its gorge and sustains a counterpoise of invariable weight. Upon the same axle an ordinary wheel is hung, over the gorge of which passes an endless chain to manœuvre the bridge by animal power.

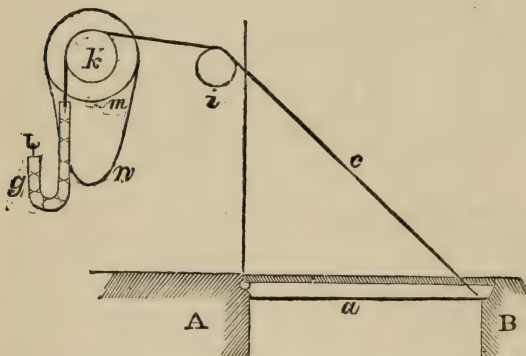


Fig. 201—Shows the arrangement of a draw-bridge with a variable counterpoise.

A and B, abutments.
g, variable counterpoise formed of a chain with flat links, one end of which is attached to a fixed point, and the other to the chain *c* attached to the movable end of the platform.
t, fixed pulley over which the chain *c* passes to the small wheel *k* fixed on a horizontal shaft, to which is also attached the wheel *m* and the endless chain *n* for manœuvring the bridge.

Of the combinations of variable counterpoises the mechanism of M. Poncelet, which has been successfully applied in many instances in France for the draw-bridges of military works, is one of the most simple in its arrangement and construction. The movable end of the platform (Fig. 201) is connected by a common chain, that passes over the gorge of a wheel hung upon a horizontal shaft above the platform, with another chain of variable breadth, formed of flat bar links, which forms the counterpoise. The chain counterpoise is attached at its other extremity to a fixed point in such a way, that when the platform ascends a portion of the weight of the chain is borne by this fixed point; and thus the weight of

the counterpoise decreases as the platform rises. The system is manœuvred by an endless chain passed over the gorge of a wheel hung upon the horizontal shaft.

For light platforms a counterpoise may be dispensed with, and the bridge may be manœuvred by connecting the chain attached to the movable end of the platform to a horizontal shaft, which is turned by the usual tooth-work combinations.

When the locality does not admit of manœuvring the

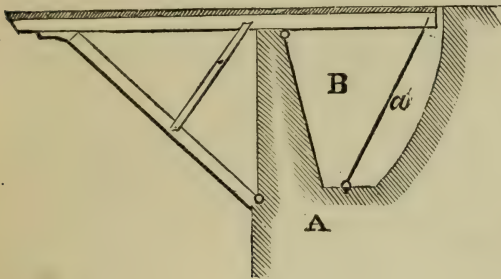


Fig. 202—Shows the arrangement of a draw-bridge where the counterpoise is formed by prolonging back the platform.

A, abutment.

B, well of a suitable form for manœuvring the bridge.

α , chain-stay to keep the platform firm when the bridge is down.

bridge by a chain connected with some point above the framework, the platform (Fig. 202) is continued back, from two-thirds to three-fifths its length, from the face of the abutment, to form a counterpoise for the platform of the bridge. The horizontal axis of the bridge is placed near the face of the abutment, and a well of a suitable shape to receive the posterior portion of the platform that forms the counterpoise is formed behind the abutment.

The mechanism for working the bridge may consist of a chain and capstan below the platform-counterpoise, or of a suitable combination of tooth-work.

In bridges of a single platform, the movable extremity, when the bridge is lowered, rests on the opposite abutment, and no intermediate support will be required for the structure if the framework be of sufficient strength; but when a double bridge, consisting of two platforms, is used, the platforms (Fig. 200) should be supported near their movable ends, when the bridge is down, by struts movable around the joint by which they are connected with the face of the abutments. These struts are so connected with the bridge that they are detached from it and drawn up when it is raised, and fall back into their places, abutting against blocks near the movable end of the platform, when the bridge is down. By these arrangements the chains for working the bridge are relieved from a

portion of the strain when the bridge is down, and it is also rendered more firm.

When the counterpoise is formed by the rear part of the platform, additional security may be given to the bridge when down by attaching two chains beneath the platform, and securing them to anchoring-points at the bottom of the well. In some cases a heavy bar, fitted to staples beneath connected with the timbers of the platform, is used for the same purpose.

In double bridges the two platforms when lowered should abut against each other, giving a slight elevation to the centre of the bridge. This not only gives greater stiffness, but is favorable to detaching the platforms when the bridge is to be raised.

For draw, and every kind of movable bridge, temporary barriers should be erected on each side at the entrance upon the bridge, to prevent accidents by persons attempting to cross the bridge before it is properly secured when lowered.

681. Turning-bridges. These bridges revolve horizontally upon a vertical shaft or gudgeon below the platform, which is usually thrown far enough back from the face of the abutment to place the side of the bridge, when brought round, just within this face. The weights of the parts of the bridge around the shaft should balance each other.

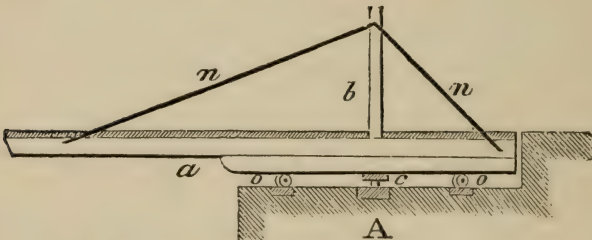


Fig. 203—Represents the arrangement of a turning-bridge.
a, platform of the bridge.
b, vertical posts to which the iron stays *n n* are attached.
c, vertical shaft or gudgeon on which the bridge turns.
o o, conical rollers.

To support and manœuvre the bridge (Fig. 203) a circular ring of iron, or *roller-way*, of less diameter than the breadth of the bridge, and concentric with the vertical shaft, is firmly imbedded in masonry. Fixed rollers, in the shape of truncated cones, are attached at equal distances apart to the framework of the platform beneath, and rest upon the roller-way.

The bridge is worked by a suitably arranged tooth-work, or by a chain and capstan. In some cases cast-iron balls, resting on a grooved roller-way, and fitting into one of corresponding shape fixed beneath the platform, have been used for manœuvring the bridge.

The ends of the bridge are cut in the shape of circular arcs to fit recesses of a corresponding form in the abutments, so arranged as not to impede the play of the bridge.

In double-turning bridges the two ends of the platforms which come together should be of a curved shape. The platforms should be sustained from beneath by struts, like those used for draw-bridges, which can be detached and drawn into recesses when the passage is interrupted; or else they may be arranged with a ball-and-socket joint at their lower extremity, so as to be brought round with the bridge. For the purpose of giving additional strength and security to the bridge, iron stays are, in some cases, attached on each side of the platform near the extremities, and connected with vertical posts placed in a line with the vertical shaft.

Turning-bridges may be made either of timber or of cast iron; the latter material is the more suitable, as admitting of more accuracy of workmanship, and not being liable to the derangements caused by the shrinking or warping of framework of timber.

632. Swing Bridge at Providence, R. I. The details of this bridge are worthy of special study. An account of it is published in the *London Engineering* for March 21st, 1873. Fig. 204 is an elevation of the bridge, and the right-hand half of Fig. 205 is a plan of the truss work under the roadway, and the left-hand half the plan of the roadway and truss work. Fig. 206 is a section of the turn-table for supporting the bridge. An essential part is the four compound radial arms, G G, F F, Fig. 206, the lower parts of which are of cast-iron compression members, and the upper parts of two wrought-iron rods each.

The whole structure rests upon a nest of conical rollers, I I (Fig. 206), upon which it turns as it moves about. There are several small wheels *b, b, b*, which are under the turn-table, and serve only to steady it in case it tends to tip in any direction.

The strains on the several members were computed under three hypotheses, viz.: 1st. The strains due to the weight of the truss only when the draw was open. These strains were assumed to be the same as when it was closed and unloaded, for no part of the weight of the bridge was supposed to be

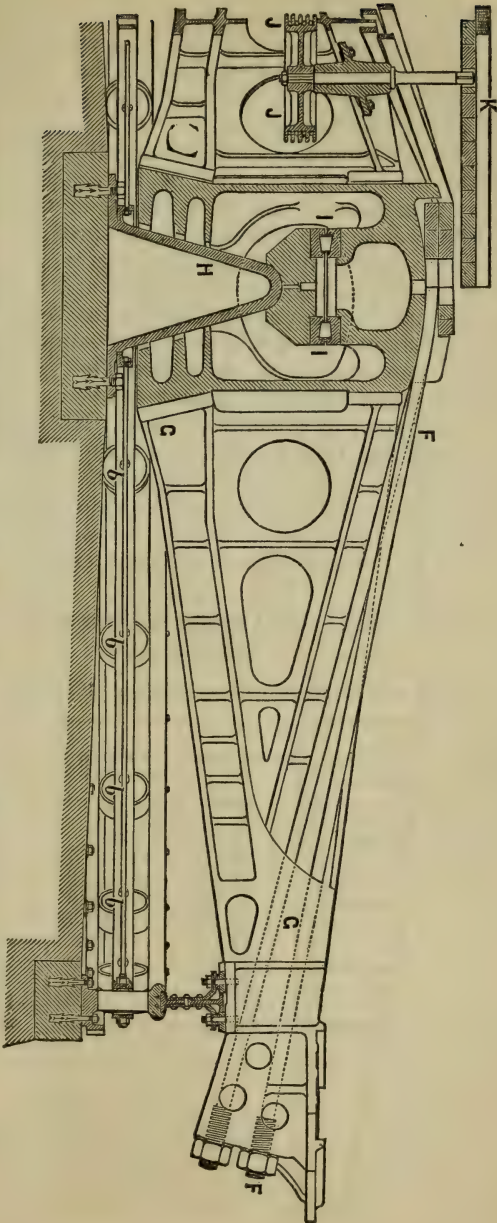


Fig. 206.—Is the turn-table. *b, b, b,* are rollers for guiding the turn-table to keep it from overturning. They serve to steady it. The whole weight rests upon a nest of conical rollers *I I*, upon which the table turns. *H* is a central block for supporting the table. *G G* is a cast-iron arm, which is supported at its outer end by the wrought-iron radial arms *F F* (four in number). *J J* is the wheel for opening the draw. *A* shaft extends from *J J* upwards to the floor *K*, to which a lever is attached. Two men can easily open and close the draw.

supported at its ends, although the ends were pinned to keep them from rising when only one part was loaded. 2d. One half was supposed to be loaded while the other end was held down by the pin; and 3d. The bridge was supposed to be loaded uniformly throughout.

The call for proposals specified that the rolling load should be 3,200 lbs. per lineal foot of the bridge, and that the wrought iron should not be strained in tension to exceed 12,000 lbs. per square inch, or in compression 8,000 lbs. per square inch. The following tables give the results of the original computations for the strains and the dimensions of the pieces used. The engineer, Charles McDonald, of New York City, states that a review of the computations after the structure was completed, confirmed the general results, although in some cases the actual strains exceed those previously determined by a small amount. Although the analysis shows (see Table II.), that there is compression on the fourth and fifth bay of the upper chord, yet there is no tendency to a strain on the counter-diagonals in those panels. The inclination of the upper chord acts as a brace and thus prevents any strain in the direction of the counter-tie in those panels.

TABLE No. I.—*Showing Total Strains on Parts when the Bridge is Open, but Unloaded.*

(The sign *plus* is for compression and *minus* for tension.)

Number of Bay.	Top Chord.	Bottom Chord.	Verticals.	Diagonals.	Counter-ties.
	lb. nil.	lb. + 6,073	lb. nil	lb. — 8,427	lb. nil
End	— 6,223	+ 19,577	+ 4,407	— 20,900	“
2	— 19,941	+ 37,735	+ 13,532	— 30,868	“
3	— 38,263	+ 59,688	+ 22,565	— 40,800	
4	— 60,280	+ 85,759	+ 32,227	— 51,340	
5	— 86,300	+ 116,189	+ 42,702	— 62,600	
6	— 116,600	+ 151,625	+ 55,047	— 75,375	
7	— 151,860	+ 193,249	+ 68,463	— 90,350	
8	— 193,400	+ 242,624	+ 84,090	— 107,637	
9	— 242,624	+ 242,624	+ 98,625	nil	
Centre					

TABLE NO. II.—*Showing Total Strains on Parts with Bridge Closed and one-half fully Loaded, the Unloaded end being Latched.*

Number of Bay.	Top Chord.	Bottom Chord.	Verticals.	Diagonals.	Counter-ties.
	lb.	lb.	lb.	lb.	lb.
Loaded end	+ 69,500	nil	+ 64,500	nil	- 81,080
2	+ 83,610	- 67,480	+ 21,500	nil	- 27,000
3	+ 83,110	- 69,800	nil	nil	nil
4	+ 69,977	- 41,600	+ 17,718	- 52,249	
5	+ 42,000	nil	+ 40,365	- 81,910	
6	nil	+ 53,800	+ 64,500	-110,674	
7	- 54,000	+120,337	+ 92,690	-141,580	
8	-120,520	+201,326	+123,440	-175,770	
9	-201,480	+299,537	+158,187	-214,100	
Centre	-299,537	+304,868	{ +193,500 }	- 60,560	
9	-249,140	+304,868	+ 96,480	-121,916	
8	-201,954	+248,943	+ 79,520	-103,670	
7	-161,500	+201,637	+ 65,190	- 86,618	
6	-126,120	+160,915	+ 51,800	- 73,141	
5	- 95,240	+125,360	+ 41,036	- 61,061	
4	- 67,713	+ 94,300	+ 30,984	- 51,000	
3	- 42,962	+ 66,778	+ 22,400	- 41,955	nil
2	- 20,600	+ 42,178	+ 14,500	- 34,240	nil
Unloaded end	nil	+ 20,098	nil	- 27,752	nil

TABLE NO. III.—*Showing Total Strains on Parts with Bridge closed and fully Loaded.*

Number of Bay.	Top Chord.	Bottom Chord.	Verticals.	Diagonals.	Counter-ties.
	lb.	lb.	lb.	lb.	lb.
End	+ 52,130	nil	+ 48,425	nil	- 60,810
2	+ 55,774	- 50,611	+ 10,500	nil	- 13,500
3	+ 55,100	- 34,940	nil	- 26,727	nil
4	+ 35,430	nil	+ 24,157	- 64,732	
5	nil	- 47,644	+ 48,425	- 94,383	
6	- 47,930	+107,600	+ 74,621	-123,340	
7	-108,000	+180,500	+104,638	-155,073	
8	-180,779	+268,200	+136,540	-190,300	
9	-268,400	+374,421	+172,803	-231,560	
Centre	-374,421	+374,420	+209,625	nil	

TABLE NO. IV.—Showing Dimensions of Principal Parts and their Effective Sectional Areas.

No. of Bay.	Top Chord.		Bottom Chord.		Verticals.		Diagonals.		Counter-ties.	
	Of what Composed.	Sectional Area.	Of what Composed.	Sectional Area.	Sectional Area.	sq. in.	Of what Composed.	Sectional Area.	Of what Composed.	sq. in.
End		sq. in.		sq. in.	sq. in.			sq. in.		sq. in.
2	Two 6 in. channel bars; $\frac{5}{8}$ in. cover plates.	12.11	Two 12 in. channel bars	17.6	10.0	Two bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	2.53	6.57	Two bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	6.57
3	do.	14.11	do.	17.6	5.75	Two bars, $1\frac{3}{16}$ in. \times $1\frac{3}{16}$ in.	2.82	2.64	One bar, $1\frac{3}{16}$ in. \times $1\frac{3}{16}$ in.	2.64
4	do.	14.11	do.	17.6	5.75	Two bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	3.78	1.0	One bar, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	1.0
5	do.	12.11	do.	17.6	5.75	Two bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	5.28		none	
6	do.	12.11	do.	17.6	7.5	Two bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	8.0		"	
7	Three 4 in. \times 1 in. bars, swelled.	9.75	Two 12 in. channel bars, $\frac{5}{16}$ in. cover plates	24.28	10.0	Four bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	10.56		"	
8	Four bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	11.4	Two 12 in. channel bars, $\frac{5}{8}$ in. cover plates	30.96	12.8	Four bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	12.25		"	
9	Three bars, $2\frac{3}{16}$ in. \times $2\frac{3}{16}$ in.	14.35	Four 12 in. channel bars, $\frac{5}{16}$ in. cover plates	41.88	17.0	Four bars, $1\frac{1}{2}$ in. \times $1\frac{1}{2}$ in.	15.01		"	
Centre	Five bars, $2\frac{1}{16}$ in. \times $2\frac{1}{16}$ in.	29.7	Four 12 in. channel bars, $\frac{5}{8}$ in. cover plates	54.69	22.25	Four bars, $2\frac{1}{8}$ in. \times $2\frac{1}{8}$ in.	18.06		"	
			do.	54.69	26.3	Two bars, $2\frac{1}{8}$ in. \times $2\frac{1}{8}$ in.	9.03		"	

683. Rolling-bridges. These bridges are placed upon fixed rollers, so that they can be moved forward or backward, to interrupt or open the communication across the water-way. The part of the bridge that rests upon the rollers, when the passage is closed, must form a counterpoise to the other. The mechanism usually employed for manœuvring these bridges consists of tooth-work, and may be so arranged that it can be worked by one or more persons standing on the bridge. Instead of fixed rollers turning on axles, iron balls, resting in a grooved roller-way, may be used, a similar roller-way being affixed to the framework beneath.

684. Boat-bridge. A movable bridge of this kind may be made by placing a platform to form a roadway upon a boat, or a water-tight box of a suitable shape. This bridge is placed in, or withdrawn from the water-way, as circumstances may require, a suitable recess or mooring being arranged for it near the water-way when it is left open.

A bridge of this character cannot be conveniently used in tidal waters, except at certain stages of the water. It may be employed with advantage on canals in positions where a fixed bridge could not be placed.

IX.

AQUEDUCT BRIDGES.

685. In aqueducts and aqueduct-bridges of masonry, for supplying reservoirs for the wants of a city, or for any other purpose, the volume of water conveyed being, generally speaking, small, the structure will present no peculiar difficulties beyond affording a water-tight channel. This may be made either of masonry, or of cast-iron pipes, according to the quantity of water to be delivered. If formed of masonry, the sides and bottom of the channel should be laid in the most careful manner with hydraulic cement, and the surface in contact with the water should receive a coating of the same material, particularly if the stone or brick used be of a porous nature. This part of the structure should not be commenced until the arches have been uncentred and the heavier parts of the structure have been carried up and have had time to settle. The interior spandrel-filling, to the level of the masonry which forms the bottom of the water-way, may either be formed of solid material, of good rubble laid in hydraulic cement, or of beton well settled in layers; or a system of interior walls, like those used in common bridges

for the support of the roadway, may be used in this case for the masonry of the water-way to rest on.

686. In canal aqueduct-bridges of masonry, as the volume of water required for the purposes of navigation is much greater than in the case of ordinary aqueducts, and as the structure has to be traversed by horses, every precaution should be taken to procure great solidity, and secure the work from accidents.

Segment arches of medium span will generally be found most suitable for works of this character. The section of the water-way is generally of a trapezoidal form, the bottom line being horizontal, and the two sides receiving a slight batir; its dimensions are usually restricted to allow the passage of a single boat at a time. On one side of the water-way a horse or *tow-path* is placed, and on the other a narrow footpath. The water-way should be faced with a hard cut-stone masonry, well bonded to secure it from damage from the passage of the boats. The space between the facing of the water-way, termed the *trunk* of the aqueduct, and the head-walls, is filled in with solid material, either of rubble or of beton.

A parapet-wall of the ordinary form and dimensions surmounts the tow and foot paths.

The approach to an aqueduct-bridge from a canal is made by gradually increasing the width of the trunk between the wings, which, for this purpose, usually receives a curved shape, and narrowing the water-way of the canal so as to form a convenient access to the aqueduct. Great care should be taken to form a perfectly water-tight junction between the two works.

687. When cast iron or timber is used for the trunk of an aqueduct-bridge, the abutments and piers should be built of stone. The trunk, which, if of cast iron, is formed of plates with flanches to connect them, or, if of timber, consists of one or two thicknesses of plank supported on the outside by a framing of scantling, may be supported by a bridge-frame of cast iron, or of timber, or be suspended from chains or wire cables.

The tow-path may be placed either within the water-way, or, as is most usually done, without. It generally consists of a simple flooring of plank laid on cross-joists supported from beneath by suitably-arranged framework.

CHAPTER VI.

ROOFS.

688. **A Roof**, in common language, is the covering over a structure, the chief object of which is to protect the building against the effects of snow and rain. It is composed of boards, shingles, slate, mastic, or other suitable materials.

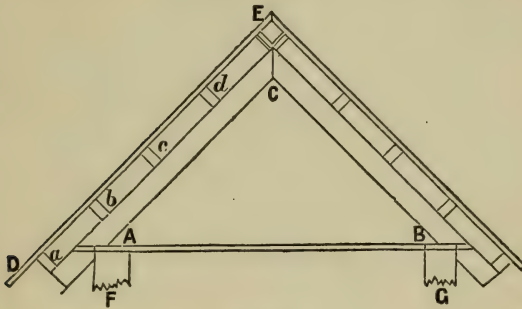


Fig. 207.

The inclined pieces AC, and BC, Fig. 207, which support the roof are called *rafters*. When the roof is light, the roof boards DE are placed directly upon the rafters, but when the rafters are far apart, say more than four feet, small pieces *a*, *b*, *c*, and *d*, called *purlins*,* are placed across the rafters for the purpose of receiving the roof proper. AB is a tie, and F and G represent the ends of posts. The frame ABC is called a *roof truss*.

689. **Roof Trusses** have a great variety of forms, and differ greatly in the details of their construction. All the trusses which have been discussed in the preceding pages are suitable for this purpose in many cases. Some other forms are given in the following pages.

690. **General Data.** A roof truss is required to carry its own weight, the weight of the purlins, the weight of the

* Purlin beams are sometimes placed under the rafters.

roof above them, the force of the wind, the weight of snow when there is any, and in some cases certain local or concentrated loads, such as floors, machinery, and the like, which are suspended from the roof trusses.

691. The Weight of Snow. Freshly fallen snow weighs from five to twelve lbs. per cubic foot, although snow which is saturated with water weighs much more. Some say that snow is equivalent to from $\frac{1}{10}$ to $\frac{1}{8}$ of its depth in water, while others say that it may be equivalent to $\frac{1}{4}$ its depth of water.

European engineers consider that six lbs. per square foot is sufficient for snow, and eight lbs. for the pressure of the wind, making fourteen lbs. for both. Trautwine thinks that not less than twenty lbs. should be allowed in the United States.

692. The Force of the Wind. According to Mr. Smeaton, the pressure of the wind directly against a flat surface in a hurricane may be 32 lbs. per square foot. Tredgold recommends an allowance of 40 lbs. per square foot. A gauge in Girard College broke under a strain of 42 lbs. per square foot, whilst a tornado was passing near by. During the severest gale on record at Liverpool, England, there was a pressure of 42 lbs. per square foot directly upon a flat surface. During a very violent gale in Scotland, a wind-gauge once indicated 45 lbs. per square foot. Buildings which are more or less protected will not be subjected to such high pressures.

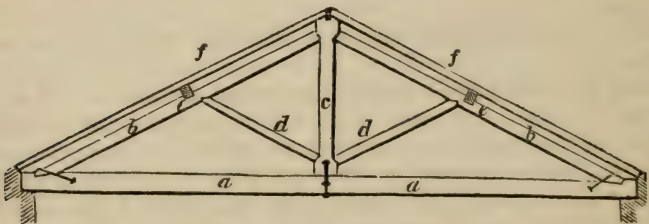


Fig. 208—Represents a roof truss for medium spans.

a, tie-beam of truss.

b, b, principal rafters framed into tie-beam and the king post c, and confined at their foot by an iron strap.

d, d, struts.

e, e, purlins supporting the common rafters f, f.

693. The truss of a roof, for ordinary bearings, consists (Fig. 208) of a horizontal beam termed the *tie-beam*, with which the inclined beams, termed the *principal rafters*, are connected by suitable joints. The principal rafters may

either abut against each other at the top or *ridge*, or against a king post. Inclined struts are in some cases placed between the principal rafters and king post, with which they are connected by suitable joints.

For wider bearings the short rafters (Fig. 209) abut against a straining beam at the top. Queen posts connect these pieces with the tie-beam. A king post connects the straining beam with the top of the short rafters; and struts are placed at suitable points between the rafters and king and queen posts.

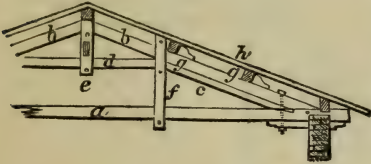


Fig. 209—Represents a roof truss for wide spans.
a, tie-beam.
b, b, principal rafters.
c, short rafters abutting against the straining beam *d*.
e and *f*, king and queen posts in pairs.
g, g, purlins supporting common rafters *h*.

In each of these combinations the weight of the roof covering and the frames is supported by the points of support. The principal rafters are subjected to cross and longitudinal strains; arising from the weight of the roof covering and from their reciprocal action on each other. These strains are transmitted to the tie-beam, causing a strain of tension upon it. The struts resist the cross strain upon the rafters and prevent them from sagging; and the king and queen posts prevent the tie and straining beams from sagging and give points of support to the struts. The short rafters and straining beam form points of support which resist the cross strain on the principal rafters, and support the strain on the queen posts.

694. Ties and Braces for Detached Frames. When a series of frames concur to one end, as, for example, the main beams of a bridge, the trusses of a roof, ribs of a centre, etc., they require to be tied together and stiffened by other beams to prevent any displacement and warping of the frames. For this purpose beams are placed in a horizontal position and notched upon each frame at suitable points to connect the whole together; while others are placed crossing each other, in a diagonal direction, between each pair of frames, with which they are united by suitable joints, to stiffen the frames and prevent them from yielding to any lateral effort. Both the ties and the diagonal braces may be either of single beams, or of beams in pairs, so arranged as to embrace between them the part of the frames with which they are connected.

695. Iron Roof Trusses. Frames of iron for roofs have been made either entirely of wrought iron, or of a combination of wrought and cast iron, or of these two last materials combined with timber. The combinations for the trusses of roofs of iron are in all respects the same as in those for timber trusses. The parts of the truss subjected to a cross strain, or to one of compression, are arranged to give the most suit-

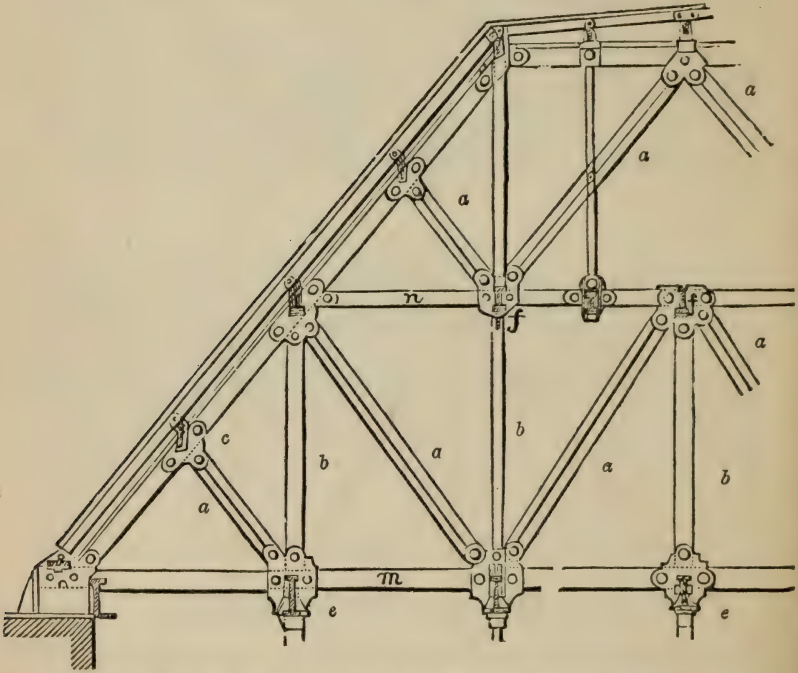


Fig. 210—Represents the half of a truss for the same building composed of wrought and cast iron.

a, a, feathered struts of cast-iron.

b, b, suspension bars in pairs.

m, n, tie and straining bars.

e, e, and *f, f*, cross sections of beams resting in the cast-iron sockets connected with the suspension bars.

able forms for strength, and to adapt them to the object in view. The parts subjected to a strain of extension, as the tie-beam and king and queen posts, are made either of wrought iron or timber, as may be found best adapted to the particular end proposed.

The joints are in some cases arranged by inserting the ends

of the beams, or bars, in cast-iron sockets, or shoes of a suitable form; in others the beams are united by joints arranged like those for timber frames, the joints in all cases being secured by wrought-iron bolts and keys. (Figs. 210. 211 and 212.)

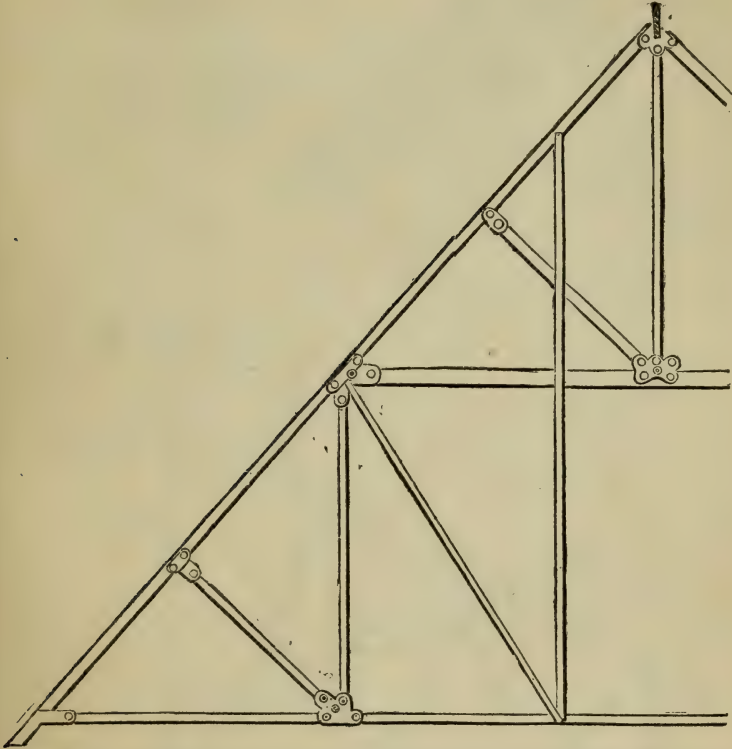


Fig. 211—Represents the half of a truss of wrought iron for the new Houses of Parliament, England. The pieces of this truss are formed of bars of a rectangular section. The joints are secured by cast-iron sockets, within which the ends of the bars are secured by screw bolts.

696. Fig. 213 shows a very common form of the roofs of gas-houses.

This here shown is supposed to be made entirely of iron. At the ridge is a ventilator to allow the escape of gases. The manner of joining the parts is sufficiently shown in the figure.

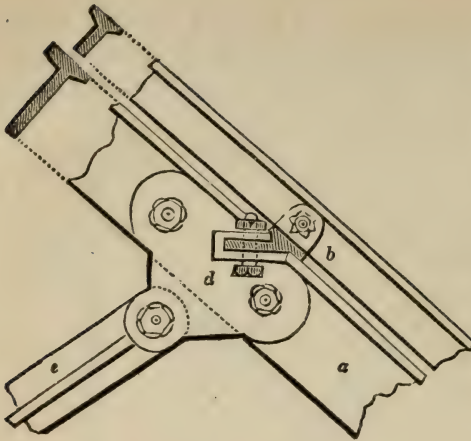


Fig. 212—Represents the arrangements of the parts at the joint *c* in Fig. 210.
A, side view of the pieces and joint.
a, principal rafter of the cross section *B*.
b, common rafter of the cross section *C*.
c, cross section of purlins and joint for fastening the common rafters to the purlins.
d, cast-iron socket arranged to confine the pieces *a*, *b*, *c*, *e*.

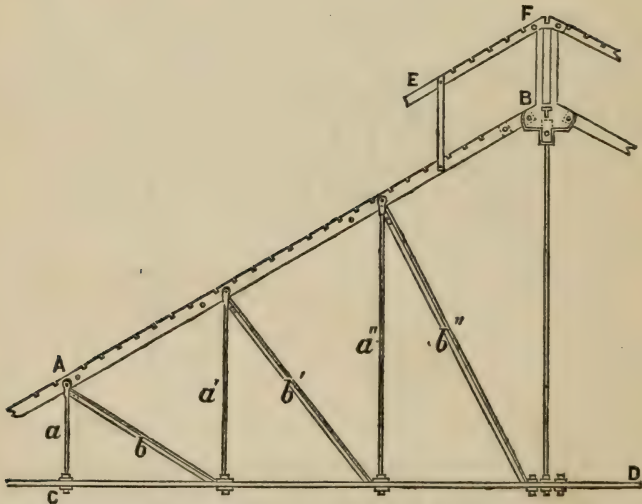


Fig. 213.—Ordinary roof of a gas-house. *A*, *B*, is the main rafter.
a, *a'* *a''* are vertical tie-rods.
b, *b'* *b''* are braces.
C, *D*, is the main tie.
E, *F*, is the ventilator.

697. Fig. 214 shows a mode of secondary trussing. *A* is a strut for supporting the middle of the main rafter. The lower end of *A* is secured to a block which is supported by the tie-rods *B* and *D*. The tie-rods *C* and *D* serve the office of a single tie for supporting the lower end of *E*. In this

way the rod D performs a double office. It may be questionable whether this arrangement is as good as it would be to have one continuous rod pass from E to F, and another rod (D) to act with B.

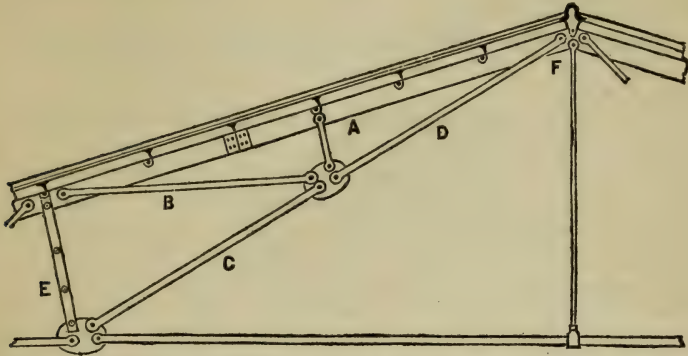


Fig. 214—A is a strut, the lower end of which is supported by the ties B and D. C and D serve the office of a continuous tie for supporting the lower end of the strut E.

It may be observed that in this Fig. the tie-rods are inclined and much longer than the struts, which is the reverse of the condition in Fig. 213. If iron only is used the arrangement of Fig. 214 will generally be the most economical, but if wooden struts are used the plan of Fig. 213 may be preferable.

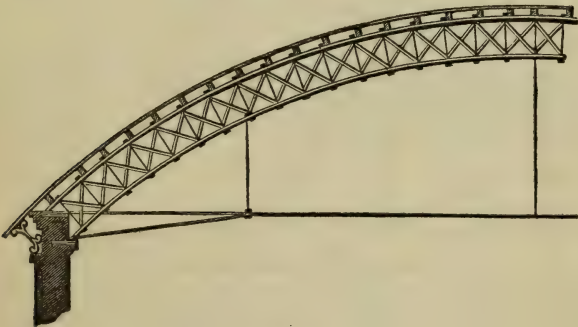


Fig. 215.

698. Depot Roof Truss. Fig. 215 shows a truss which has been used in many cases for supporting the roofs of depots and of other large buildings. The passenger depot of the

Michigan Central Railroad at Chicago was built after this plan. It was destroyed by the great fire in 1871. The plan of the arch is a Howe truss, having curved wooden chords, wooden braces and iron ties to connect the two chords. The truss formed an arch, the thrust of which was resisted by a long horizontal tie-rod.

The same style was adopted in the new roof over the depot at Troy, New York; and the Grand Central Depot in New York City.

699. A novel plan was used in making the roof over the rolling-mills at Milwaukee, Wis. An arch was made of boards so placed as to break joints and form a rib about a foot wide and eighteen inches deep, and one hundred and eighty feet span. The boards were bolted together so as to make the rib continuous, and then the upper part of the arch was trussed after the Howe plan. The main objects of this plan were cheapness and to secure the whole inclosed area free from posts or other similar obstructions. But it was found that the arch was too weak, especially when required to carry the large ventilator which was placed over it, and posts were afterwards added.

700. **Roofs and Domes.** In some cases—especially in state buildings—domes are placed upon roofs for architectural effect.

Fig. 216.

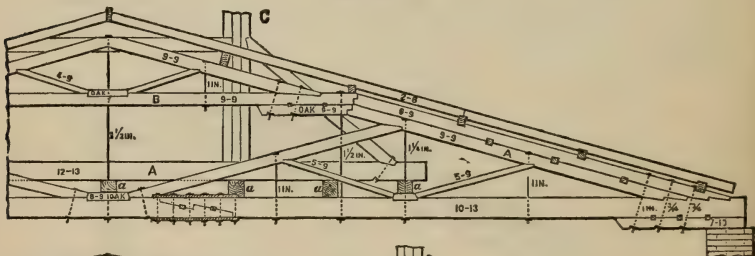


Fig. 217.

Figs. 216 and 217—Are two trusses, which are made in pairs, and are placed fourteen inches apart, for supporting part of the dome (octagonal) of the State capitol at Montpelier, Vt. *a a a* are the short timbers for connecting the two trusses. *A* is a timber resting upon the cross pieces *a a a*. *C* is a post of the dome resting upon the piece *A*. Span, sixty-seven feet four inches.

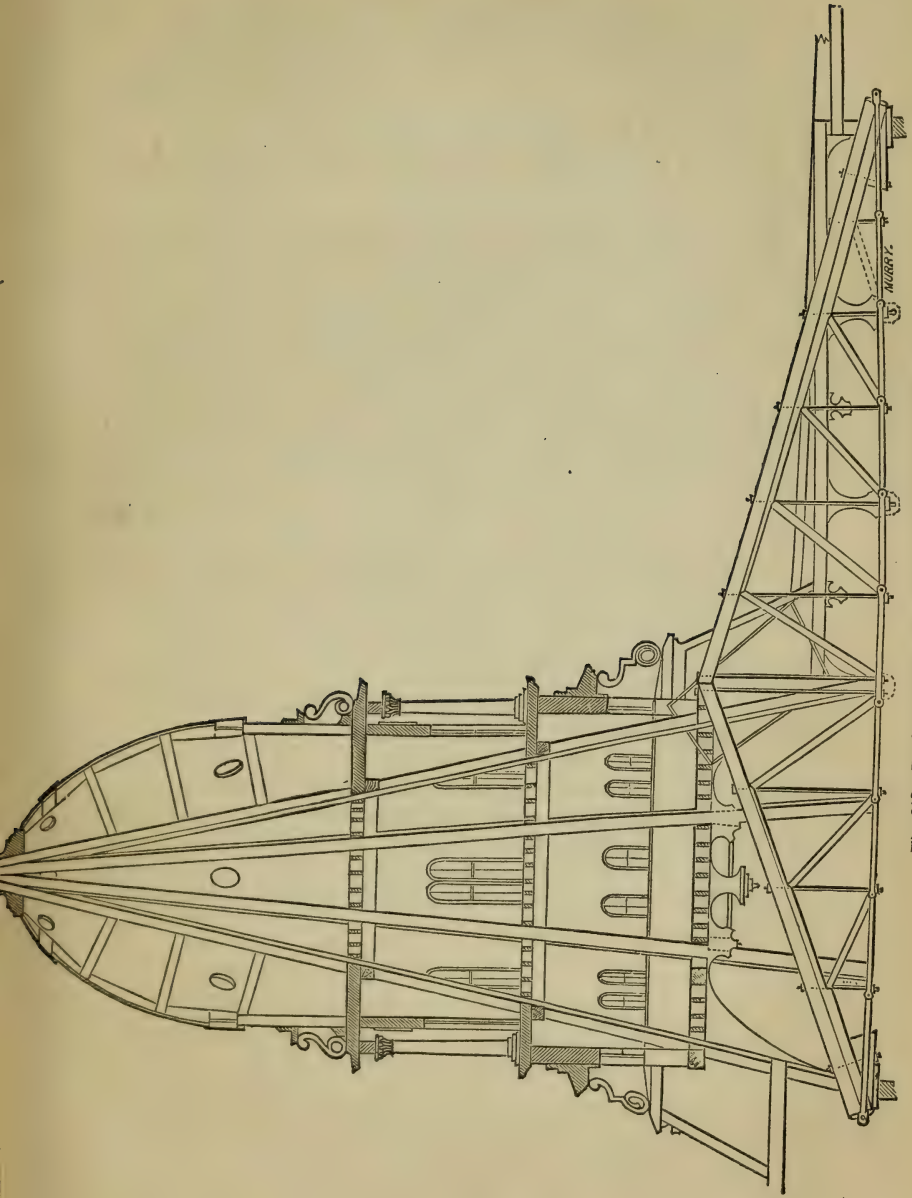


Fig. 218.—Roof over the large hall of the University of Michigan.

The dome of the State capitol, Vermont, rests upon wooden trusses (Figs. 216 and 217), having a span of sixty-seven feet four inches. The trusses are supported at the ends only. They are placed in pairs, fourteen inches apart. The Fig. shows two pairs. They are connected by short cross beams, *aa*; upon which rest other timbers, *A*, for receiving the posts, *C*, of the dome. It is profitable for the student to make a careful study of the details of this structure.

Where the thrust is severe especial care should be taken to secure a good bearing for the ends of the timbers. The lower ends of the main rafters tend to shear the main tie at its ends, and to prevent this action they should enter the tie at a reasonable distance from its ends. The bearing pieces are of white oak, and the rest of the timber is spruce. The trusses are constructed differently, because the posts of the dome bear upon them in different places.

701. Roof over the large hall of the University of Michigan. This truss and dome presents a very novel feature (Fig. 218), inasmuch as a part of the dome rests directly, or nearly so, upon the posts which support the roof, while the other part rests directly upon the trusses which support the roof. The span is eighty feet in the clear, and the depth of the trusses is sixteen feet. The main rafters are pieces of solid pine fourteen inches wide by sixteen inches deep. They are not of equal length, the longer ones having a horizontal run of forty-seven feet, and the shorter ones thirty-three feet. The secondary trussing is distributed according to the strains. The dome is thirty feet in diameter at the base.

The ceiling of the large hall being attached directly to trusses, it was necessary to make very strong trusses, so that the action of the wind upon the dome, and also the effect of the changes of temperature might not so disturb the trusses by causing them to deflect, as to destroy the ceiling. (For a computation of the parts, see *Wood's Bridges and Roofs*, pp. 194-211.

CHAPTER VII.

ROADS.

I. COMMON ROADS. II. RAILROADS.

702. In establishing a line of internal communication of any character, whether it be an ordinary road, railroad, or canal, the main considerations to which the attention of the engineer must be directed in the outset are: 1, the probable character and amount of traffic over the line; 2, the wants of the community in the neighborhood of the line; 3, the natural features of the country, between the points of *arrival* and *departure*, as regards their adaptation to the proposed communication.

As the last point alone comes exclusively within the province of the engineer's art, and within the limits prescribed to this work, attention will be confined solely to its consideration.

703. **Reconnaissance.** A thorough examination and study of the ground by the eye, termed a *reconnaissance*, is an indispensable preliminary to any more accurate and minute survey by instruments, to avoid loss of time, as by this more rapid operation any ground unsuitable for the proposed line will be as certainly detected by a person of some experience, as it could be by the slow process of an instrumental survey. Before, however, proceeding to make a reconnaissance, a careful inspection of the general maps of that portion of the country through which the communication is to pass will facilitate, and may considerably abridge the labors of the engineer; as from the natural features laid down upon them, particularly the direction of the water-courses, he will at once be able to detect those points which will be favorable, or otherwise, to the general direction selected for the line. This will be sufficiently evident when it is considered—1, that the water-courses are necessarily the lowest lines of the valleys through which they flow, and that their direction must also be that of the lines of greatest declivity of their respective valleys; 2, that from the position of the water-courses the position also of the high grounds by which they are separated naturally follows, as well as the approximate position at least

of the ridges, or highest lines of the high grounds, which separate their opposite slopes, and which are at the same time the lines of greatest declivity common to these slopes, as the water-courses are the corresponding lines of the slopes that form the valleys.

Keeping these facts (which are susceptible of rigid mathematical demonstration) in view, it will be practicable, from a careful examination of an ordinary general map, if accurately constructed, not only to trace, with considerable accuracy, the general direction of the ridges from having that of the water-courses, but also to detect those depressions in them which will be favorable to the passage of a communication intended to connect two main or two secondary valleys. The following illustrations may serve to place this subject in a clearer aspect.

If, for example, it be found that on any portion of a map the water-courses seem to diverge from or converge towards one point, it will be evident that the ground in the first case must be the common source or supply of the water-courses, and therefore the highest; and in the second case that it is the lowest, and forms their common recipient.

If two water-courses flow in opposite directions from a common point, it will show that this is the point from which they derive their common supply, at the head of their respective valleys, and that it must be fed by the slopes of high grounds above this point; or, in other words, that the valleys of the two water-courses are separated by a chain of high grounds, which, at the point where it crosses them, presents a depression in its ridge, which would be the natural position for a communication connecting the two valleys.

If two water-courses flow in the same direction and parallel to each other, it will simply indicate a general inclination of the ridge between them, in the same direction as that of the water-courses. The ridge, however, may present in its course elevations and depressions, which will be indicated by the points in which the water-courses of the secondary valleys, on each side of it, intersect each other on it; and these will be the lowest points at which lines of communication, through the secondary valleys, connecting the main water-courses, would cross the dividing ridge.

If two water-courses flow in the same direction, and parallel to each other, and then at a certain point assume divergent directions, it will indicate that this is the lowest point of the ridge between them.

If two water-courses flow in parallel but opposite directions,

depressions in the ridge between them will be shown by the meeting of the water-courses of the secondary valleys on the ridge; or by an approach towards each other, at any point, of the two principal water-courses.

Furnished with the data obtained from the maps, the character of the ground should be carefully studied both ways by the engineer, first from the point of departure to that of arrival, and then returning from the latter to the former, as without this double traverse natural features of essential importance might escape the eye.

704. Surveys. From the results of the reconnaissance, the engineer will be able to direct understandingly the requisite surveys, which consist in measuring the lengths, determining the directions, and ascertaining both the longitudinal and cross levels of the different routes, or, as they are termed, *trial-lines*, with sufficient accuracy to enable him to make a comparative estimate both of their practicability and cost. As the expense of making the requisite surveys is usually but a small item compared with that of constructing the communication, no labor should be spared in running every practicable line, as otherwise natural features might be overlooked which might have an important influence on the cost of construction.

705. Map and Memoir. The results of the surveys are accurately embodied in a map exhibiting minutely the topographical features and sections of the different trial-lines, and in a memoir which should contain a particular description of those features of the ground that cannot be shown on a map, with all such information on other points that may be regarded as favorable, or otherwise, to the proposed communication; as, for example, the nature of the soil, that of the water-courses met with, etc., etc.

706. Location of Common Roads. In selecting among the different trial-lines of the survey the one most suitable to a common road, the engineer is less restricted, from the nature of the conveyance used, than in any other kind of communication. The main points to which his attention should be confined are: 1, to connect the points of arrival and departure by the most direct, or shortest line; 2, to avoid unnecessary ascents and descents, or, in other words, to reduce the ascents and descents to the smallest practicable limit; 3, to adopt such suitable slopes, or *gradients*, for the *axis*, or centre line of the road, as the nature of the conveyance may demand; 4, to give the axis such a position with regard to the surface of the ground and the natural obstacles

to be overcome, that the cost of construction for the excavations and embankments required by the gradients, and for the bridges and other accessories, shall be reduced to the lowest amount.

707. Deviations from the right line drawn on the map, between the points of arrival and departure, will be often demanded by the natural features of the ground. In passing the dividing ridges of main, or secondary valleys, for example, it will frequently be found more advantageous, both for the most suitable gradients, and to diminish the amount of excavation and embankment, to cross the ridge at a lower point than the one in which it is intersected by the right line, deviating from the right line either towards the *head*, or upper part of the valley, or towards its outlet, according to the advantages presented by the natural features of the ground, both for reducing the gradients and the amount of excavation and embankment.

Where the right line intersects either a marsh or water-course, it may be found less expensive to change the direction, avoiding the marsh, or intersecting the water-course at a point where the cost of construction of a bridge, or of the approaches to it, will be more favorable than the one in which it is intersected by the right line.

Changes from the direction of the right line may also be favorable for the purpose of avoiding the intersection of secondary water-courses; of gaining a better soil for the roadway; of giving a better exposure of its surface to the sun and wind; or of procuring better materials for the road-covering.

By a careful comparison of the advantages presented by these different features, the engineer will be enabled to decide how far the general direction of the right line may be departed from with advantage to the location. By choosing a more sinuous course the length of the line will often not be increased to any very considerable degree, while the cost of construction may be greatly reduced, either in obtaining more favorable gradients, or in lessening the amount of excavation and embankment.

708. When the points of arrival and departure are upon different levels, as is usually the case, it will seldom be practicable to connect them by a continual ascent. The most that can be done will be to cross the dividing ridges at their lowest points, and to avoid, as far as practicable, the intersection of considerable secondary valleys which might require any considerable ascent on one side and descent on the other.

709. The gradients upon common roads will depend upon the kind of material used for the road-covering, and upon the state in which the road-surface is kept. The gradient in all cases should be less than the *angle of repose*, or of that inclination of the axis of the road in which the ordinary vehicles for transportation would remain at a state of rest, or, if placed in motion, would descend by the action of gravity with uniform velocity.

The gradients corresponding to the angle of repose have been ascertained by experiments made upon the various road-coverings in ordinary use, by allowing a vehicle to descend along a road of variable inclination until it was brought to a state of rest by the retarding force of friction; also, by ascertaining the amount of force, termed *the force of traction*, requisite to put in motion a vehicle with a given load on a level road.

The following are the results of experiments made by Mr. Macneill, in England, to determine the force of traction for one ton upon level roads:—

No. 1. Good pavement, the force of traction is.	33 lbs.
“ 2. Broken-stone surface laid on an old flint road	65 “
“ 3. Gravel road.	147 “
“ 4. Broken-stone surface on a rough pavement bottom.	46 “
“ 5. Broken-stone surface on a bottom of beton.	46 “

From this it appears that the angle of repose in the first case is represented by $\frac{33}{2240}$, or $\frac{1}{68}$ nearly; and that the slope of the road should therefore not be greater than one perpendicular to sixty-eight in length; or that the height to be overcome must not be greater than one sixty-eighth of the distance between the two points measured along the road, in order that the force of friction may counteract that of gravity in the direction of the road.

A similar calculation will show that the angle of repose in the other cases will be as follows:

No. 2.	1 to.	35 nearly.
“ 3.	1 to.	15 “
“ 4 and 5.	1 to.	49 “

These numbers, which give the angle of repose between $\frac{1}{35}$ and $\frac{1}{49}$ for the kinds of road-covering Nos. 2 and 4 in most ordinary use, and corresponding to a road-surface in good order, may be somewhat increased, to from $\frac{1}{28}$ to $\frac{1}{33}$, for the ordinary state of the surface of a well-kept road, without there being any necessity for applying a brake to the wheels in descending, or going out of a trot in ascending. The

steepest gradient that can be allowed on roads with a broken-stone covering is about $\frac{1}{20}$, as this, from experience, is found to be about the angle of repose upon roads of this character in the state in which they are usually kept. Upon a road with this inclination, a horse can draw at a walk his usual load for a level without requiring the assistance of an extra horse; and experience has farther shown that a horse at the usual walking pace will attain, with less apparent fatigue, the summit of a gradient of $\frac{1}{20}$ in nearly the same time that he would require to reach the same point on a trot over a gradient of $\frac{1}{33}$.

A road on a dead level, or one with a continued and uniform ascent between the points of arrival and departure, where they lie upon different levels, is not the most favorable to the draft of the horse. Each of these seems to fatigue him more than a line of alternate ascents and descents of slight gradients; as, for example, gradients of $\frac{1}{100}$, upon which a horse will draw as heavy a load with the same speed as upon a horizontal road.

The gradients should in all cases be reduced as far as practicable, as the extra exertion that a horse must put forth in overcoming heavy gradients is very considerable; they should as a general rule, therefore, be kept as low at least as $\frac{1}{33}$, wherever the ground will admit of it. This can generally be effected, even in ascending steep hill-sides, by giving the axis of the road a zigzag direction, connecting the straight portions of the zigzags by circular arcs. The gradients of the curved portions of the zigzags should be reduced, and the roadway also at these points be widened, for the safety of vehicles descending rapidly. The width of the roadway may be increased about one-fourth, when the angle between the straight portions of the zigzags is from 120° to 90° ; and the increase should be nearly one-half where the angle is from 90° to 60° .

710. Having laid down upon the map the approximate location of the axis of the road, a *comparison can then be made between the solid contents of the excavations and embankments*, which should be so adjusted that they shall balance each other, or, in other words, the necessary excavations shall furnish sufficient earth to form the embankments. To effect this, it will frequently be necessary to alter the first location, by shifting the position of the axis to the right or left of the position first assumed, and also by changing the gradients within the prescribed limits. This is a problem of very considerable intricacy, whose solution can only be arrived at by

successive approximations. For this purpose, the line must be subdivided into several portions, in each of which the equalization should be attempted independently of the rest, instead of trying a general equalization for the whole line at once.

In the calculations of solid contents required in balancing the excavations and embankments, the most accurate method consists in subdividing the different solids into others of the most simple geometrical forms, as prisms, prismoids, wedges, and pyramids, whose solidities are readily determined by the ordinary rules for the mensuration of solids. As this process, however, is frequently long and tedious, other methods requiring less time, but not so accurate, are generally preferred, as their results give an approximation sufficiently near the true for most practical purposes. They consist in taking a number of equidistant profiles, and calculating the solid contents between each pair, either by multiplying the half sum of their areas by the distance between them, or else by taking the profile at the middle point between each pair, and multiplying its area by the same length as before. The latter method is the more expeditious; it gives less than the true solid contents, but a nearer approximation than the former, which gives more than the true solid contents, whatever may be the form of the ground between each pair of cross profiles.

In calculating the solid contents, allowance must be made for the difference in bulk between the different kinds of earth when occupying their natural bed and when made into embankment. From some careful experiments on this point made by Mr. Elwood Morris, a civil engineer, and published in the *Journal of the Franklin Institute*, it appears that light sandy earth occupies the same space both in excavation and embankment; clayey earth about one-tenth less in embankment than in its natural bed; gravelly earth also about one-twelfth less; rock in large fragments about five-twelfths more, and in small fragments about six-tenths more.

711. Another problem connected with the one in question is that of determining the *lead*, or the *mean distance to which the earth taken from the excavations must be carried to form the embankments*. From the manner in which the earth is usually transported from the one to the other, this distance is usually that between the centre of gravity of the solid of excavation and that of its corresponding embankment. Whatever disposition may be made of the solids of excavation, it is important, so far as the cost of their removal is concerned,

that the lead should be the least possible. The solution of the problem under this point of view will frequently be extremely intricate, and demand the application of all the resources of the higher analysis. One general principle, however, is to be observed in all cases, in order to obtain an approximate solution, which is, that in the removal of the different portions of the solid of excavation to their corresponding positions on that of the embankment, the paths passed over by their respective centres of gravity shall not cross each other either in a horizontal or vertical direction. This may in most cases be effected by intersecting the solids of excavation and embankment by vertical planes in the direction of the removal, and by removing the partial solids between the planes within the boundaries marked out by them.

712. The definitive location having been settled by again going over the line, and comparing the features of the ground with the results furnished by the preceding operations, general and detailed maps of the different divisions of the definitive location are prepared, which should give, with the utmost accuracy, the longitudinal and cross sections of the natural ground, and of the excavations and embankments, with the horizontal and vertical measurements carefully written upon them, so that the superintending engineer may have no difficulty in setting out the work from them on the ground.

In addition to these maps, which are mainly intended to guide the engineer in regulating the earth-work, detailed drawings of the road-covering, of the masonry and carpentry of the bridges, culverts, etc., accompanied by written specifications of the manner in which the various kind of work is to be performed, should be prepared for the guidance both of the engineer and workmen.

713. With the data furnished by the maps and drawings, the engineer can proceed to *set out the line on the ground*. The axis of the road is determined by placing stout stakes or pickets at equal intervals apart, which are numbered to correspond with the same points on the map. The width of the roadway and the lines on the ground corresponding to the side slopes of the excavations and embankments are laid out in the same manner, by stakes placed along the lines of the cross profiles.

Besides the numbers marked on the stakes, to indicate their position on the map, other numbers, showing the depth of the excavations, or the height of the embankments from the sur-

face of the ground, accompanied by the letters *Cut. Fill.* to indicate a *cutting*, or a *filling*, as the case may be, are also added to guide the workmen in their operations. The positions of the stakes on the ground, which show the principal points of the axis of the road, should, moreover, be laid down on the map with great accuracy, by ascertaining their bearing and distances from any fixed and marked objects in their vicinity, in order that the points may be readily found should the stakes be subsequently misplaced.

714. Earth-Work. This term is applied to whatever relates to the construction of the excavations and embankments, to prepare them for receiving the road-covering.

715. In forming the excavations, the *inclination of the side slopes demands* peculiar attention. This inclination will depend on the nature of the soil, and the action of the atmosphere and internal moisture upon it. In common soils, as ordinary garden earth formed of a mixture of clay and sand, compact clay, and compact stony soils, although the side slopes would withstand very well the effects of the weather with a greater inclination, it is best to give them two base to one perpendicular, as the surface of the roadway will, by this arrangement, be well exposed to the action of the sun and air, which will cause a rapid evaporation of the moisture on the surface. Pure sand and gravel may require a greater slope, according to circumstances. In all cases where the depth of the excavation is great, the base of the slope should be increased. It is not usual to use any artificial means to protect the surface of the side slopes from the action of the weather; but it is a precaution which, in the end, will save much labor and expense in keeping the roadway in good order. The simplest means which can be used for this purpose consist in covering the slopes with good sods (Fig. 219), or



Fig. 219. Cross-section of a road in excavation.

- A, road-surface.
- B, side slopes.
- C, top surface-drain.

else with a layer of vegetable mould about four inches thick, carefully laid and sown with grass-seed. These means will be amply sufficient to protect the side slopes from injury when they are not exposed to any other causes of deterioration than the wash of the rain, and the action of frost on the ordinary moisture retained by the soil.

The side slopes form usually an unbroken surface from the

foot to the top. But in deep excavations, and particularly in soils liable to slips, they are sometimes formed with horizontal offsets, termed *benches*, which are made a few feet wide, and have a ditch on the inner side to receive the surface water from the portion of the side slope above them. These benches catch and retain the earth that may fall from the portion of the side slope above.

When the side slopes are not protected, it will be well, in localities where stone is plenty, to raise a small wall of dry stone at the foot of the slopes, to prevent the wash of the slopes from being carried into the roadway.

A covering of brushwood, or a thatch of straw, may also be used with good effect; but, from their perishable nature, they will require frequent renewal and repairs.

In excavations through solid rock, which does not disintegrate on exposure to the atmosphere, the side slopes might be made perpendicular; but as this would exclude, in a great degree, the action of the sun and air, which is essential to keeping the road-surface dry and in good order, it will be necessary to make the side slopes with an inclination, varying from one base to one perpendicular, to one base to two perpendicular, or even greater, according to the locality; the inclination of the slope on the south side in northern latitudes being greatest, to expose better the road-surface to the sun's rays.

The slaty rocks generally decompose rapidly on the surface, when exposed to moisture and the action of frost. The side slopes in rocks of this character may be cut into steps



Fig. 220.

(Fig. 220), and then be covered by a layer of vegetable mould sown in grass-seed, or else the earth may be sodded in the usual way.

716. The stratified soils and rocks, in which the strata have a *dip*, or inclination to the horizon, are liable to *slips*, or to give way by one stratum becoming detached and sliding on another, which is caused either from the action of frost, or from the pressure of water, which insinuates itself between

the strata. The worst soils of this character are those formed of alternate strata of clay and sand; particularly if the clay is of a nature to become semi-fluid when mixed with water. The best preventives that can be resorted to in these cases are to adopt a thorough system of drainage, to prevent the surface-water of the ground from running down the side slopes, and to cut off all springs which run towards the roadway from the side slopes. The surface-water may be cut off by means of a single ditch (Fig. 219) made on the up-hill side of the road, to catch the water before it reaches the slope of the excavation, and convey it off to the natural water-courses most convenient; as, in almost every case, it will be found that the side slope on the down-hill side is, comparatively speaking, but slightly affected by the surface-water.

Where *slips* occur from the action of springs, it frequently becomes a very difficult task to secure the side-slopes. If the sources can be easily reached by excavating into the side slopes, drains formed of layers of fascines or brush-wood may be placed to give an outlet to the water, and prevent its action upon the side slopes. The fascines may be covered on top with good sods laid with the grass side beneath, and the excavation made to place the drain be filled in with good earth well rammed. Drains formed of broken stone, covered in like manner on top with a layer of sod to prevent the drain from becoming choked with earth, may be used under the same circumstances as fascine drains. Where the sources are not isolated, and the whole mass of the soil forming the side slopes appears saturated, the drainage may be effected by excavating trenches a few feet wide at intervals to the depth of some feet into the side slopes, and filling them with broken stone, or else a general drain of broken stone may be made throughout the whole extent of the side slope by excavating into it. When this is deemed necessary, it will be well to arrange the drain like an inclined retaining-wall, with buttresses at intervals projecting into the earth farther than the general mass of the drain. The front face of the drain should, in this case, also be covered with a layer of sods with the grass side beneath, and upon this a layer of good earth should be compactly laid to form the face of the side slopes. The drain need only be carried high enough above the foot of the side slope to tap all the sources; and it should be sunk sufficiently below the roadway-surface to give it a secure footing.

The drainage has been effected, in some cases, by sinking wells or *shafts* at some distance behind the side slopes, from

the top surface to the level of the bottom of the excavation, and leading the water which collects in them by pipes into drains at the foot of the side slopes. In others a narrow trench has been excavated, parallel to the axis of the road, from the top surface to a sufficient depth to tap all the sources which flow towards the side slope, and a drain formed either by filling the trench wholly with broken stone, or else by arranging an open conduit at the bottom to receive the water collected, over which a layer of brushwood is laid, the remainder of the trench being filled with broken stone.

717. In forming the embankments (Fig. 221), the side




Fig. 221.

slopes should be made with a less inclination than that which the earth naturally assumes; for the purpose of giving them greater durability, and to prevent the width of the top surface, along which the roadway is made, from diminishing by every change in the side slopes, as it would were they made with the natural slope. To protect the side slopes more effectually, they should be sodded, or sown in grass-seed; and the surface-water of the top should not be allowed to run down them, as it would soon wash them into gullies, and destroy the embankment. In localities where stone is plenty, a sustaining wall of dry stone may be advantageously substituted for the side slopes.

To prevent, as far as possible, the settling which takes place in embankments, they should be formed with great care; the earth being laid in successive layers of about four feet in thickness, and each layer well settled with rammers. As this method is very expensive, it is seldom resorted to except in works which require great care, and are of trifling extent. For extensive works, the method usually followed, on account of economy, is to embank out from one end, carrying forward the work on a level with the top surface. In this case, as there must be a want of compactness in the mass, it would be best to form the outsides of the embankment first, and to gradually fill in towards the centre, in order that the earth may arrange itself in layers with a dip from the sides inwards: this will in a great measure counteract any tendency to slips outward. The foot of the slopes should be se-

cured by buttressing them either by a low stone wall, or by forming a slight excavation for the same purpose.

718. When the axis of the roadway is laid out on the side slope of a hill, and the road-surface is formed partly by excavating and partly by embanking out, the usual and most simple method is to extend out the embankment gradually along the whole line of excavation. This method is insecure, and no pains therefore should be spared to give the embankment a good footing on the natural surface upon which it rests, particularly at the foot of the slope. For this purpose the natural surface (Fig. 222) should be cut into steps, or off-

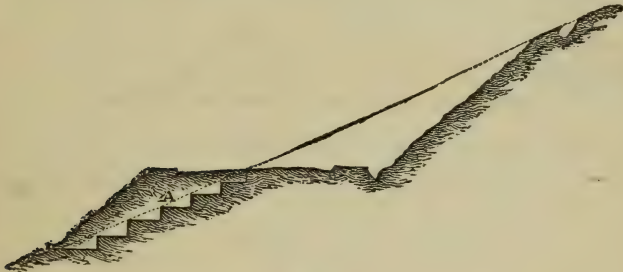


Fig. 222.

sets, and the foot of the slope be secured by buttressing it against a low stone wall, or a small terrace of carefully rammed earth.

In side-formings along a natural surface of great inclination, the method of construction just explained will not be sufficiently secure; sustaining-walls must be substituted for the side slopes, both of the excavations and embankments. These walls may be made simply of dry stone, when the stone can be procured in blocks of sufficient size to render this kind of construction of sufficient stability to resist the pressure of the earth. But when the blocks of stone do not offer this security, they must be laid in mortar (Fig. 223), and hydraulic mortar is the only kind which will form a safe construction. The wall which supplies the slope of the excavation should be carried up as high as the natural surface of the ground; the one that sustains the embankment should be built up to the surface of the roadway; and a parapet-wall should be raised upon it, to secure vehicles from accidents in deviating from the line of the roadway.

A road may be constructed partly in excavation and partly in embankment along a rocky ledge, by blasting the rock,

when the inclination of the natural surface is not greater than one perpendicular to two base; but with a greater inclination than this, the whole should be in excavation.

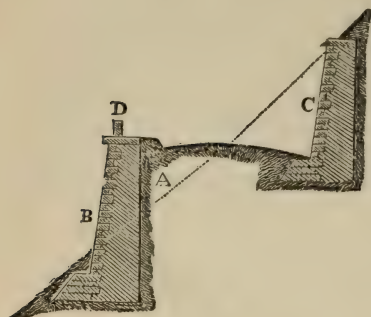


Fig. 223.—Cross section of a road in steep side-forming.

A, filling.
B, sustaining-wall of filling.
C, breast-wall of cutting.
D, parapet-wall of footpath.

719. There are examples of road constructions, in localities like the last, supported on a framework, consisting of horizontal pieces, which are firmly fixed at one end by being let into holes drilled in the rock, and are sustained at the other by an inclined strut underneath, which rests against the rock in a shoulder formed to receive it.

720. When the excavations do not furnish sufficient earth for the embankments, it is obtained from excavations termed *side-cuttings*, made at some place in the vicinity of the embankment, from which the earth can be obtained with most economy.

If the excavations furnish more earth than is required for the embankment, it is deposited in what is termed *spoil-bank*, on the side of the excavation. The spoil-bank should be made at some distance back from the side slope of the excavation, and on the down-hill side of the top surface; and suitable drains should be arranged to carry off any water that might collect near it and affect the side slope of the excavation.

The forms to be given to side-cuttings and spoil-banks will depend, in a great degree, upon the locality: they should, as far as practicable, be such that the cost of removal of the earth shall be the least possible.

721. **Drainage.** A system of thorough drainage, by which the water that filters through the ground will be cut off from the soil beneath the roadway, to a depth of at least three feet below the bottom of the road-covering, and by which that which falls upon the surface will be speedily conveyed off,

before it can filter through the road-covering, is essential to the good condition of a road.

The surface-water is conveyed off by giving the surface of the roadway a slight transverse convexity, from the middle to the sides, where the water is received into the gutters, or *side-channels*, from which it is conveyed by underground aqueducts, termed *culverts*, built of stone or brick and usually arched at top, into the main drains that communicate with the natural water-courses. This convexity is regulated by making the figure of the profile an ellipse, of which the semi-transverse axis is 15 feet, and the semi-conjugate axis 9 inches; thus placing the middle of the roadway nine inches above the bottom of the side channels. This convexity, which is as great as should be given, will not be sufficient in a flat country to keep the road-surface dry; and in such localities, if a slight longitudinal slope cannot be given to the road, it should be raised, when practicable, three or four feet above the general level; both on account of conveying off speedily the surface-water, and exposing the surface better to the action of the wind.

To drain the soil beneath the roadway in a level country, ditches, termed *open side drains* (Fig. 224), are made paral-

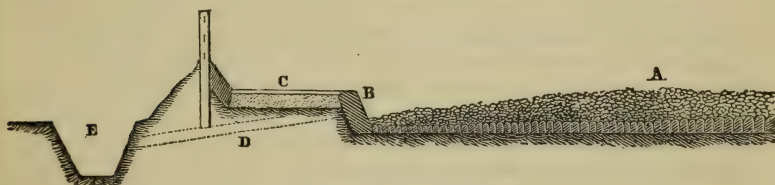


Fig. 224.—Cross-section of broken-stone road-covering.

A, road-surface,

B, side channels,

C, footpath,

D, covered drains, or culverts, leading from side channels to the side drains E.

lel to the road, and at some feet from it on each side. The bottom of the side drains should be at least three feet below the road-covering; their size will depend on the nature of the soil to be drained. In a cultivated country the side drains should be on the field side of the fences.

As open drains would be soon filled along the parts of a road in excavation, by the washings from the side-slopes, covered drains, built either of brick or stone, must be substituted for them. These drains (Fig. 225) consist simply of a flooring of flagging stone, or of brick, with two side walls of

rubble, or brick masonry, which support a top covering of flat stones, or of brick, with open joints, of about half an inch, to give a free passage-way to the water into the drain. The top is covered with a layer of straw or brushwood; and clean gravel, or broken stone, in small fragments, is laid over this, for the purpose of allowing the water to filter freely through to the drain, without carrying with it any earth or sediment, which might in time accumulate and choke it. The width and height of covered drains will depend on the materials of which they are built, and the quantity of water to which they yield a passage.




Fig. 225.—Cross-section of a covered drain.

A, drain.

a, a, side walls.

b, top stones.

c, bottom stones.

d, broken stone or large gravel laid over brush.

Besides the longitudinal covered drains in cuttings, other drains are made under the roadway which, from their form, are termed *cross mitre drains*. Their plan is in shape like the letter V, the angular point being at the centre of the road, and pointing in the direction of its ascent. The angle should be so regulated that the bottom of the drain shall not have a greater slope along either of its branches, than one perpendicular to one hundred base, to preserve the masonry from damage by the current. The construction of mitre drains is the same as the covered longitudinal drains. They should be placed at intervals of about 60 yards from each other.

In some cases surface drains, termed *catch-water drains*, are made on the side slopes of cuttings. They are run up obliquely along the surface, and empty directly into the cross drains which convey the water into the natural water-courses.

When the roadway is in side-forming, cross drains of the ordinary form of culverts are made to convey the water from the side channels and the covered drains into the natural water-courses. They should be of sufficient dimensions to convey off a large volume of water, and to admit a man to pass through them so that they may be readily cleared out, or even repaired, without breaking up the roadway over them.

The only drains required for embankments are the ordi-

nary side channels of the roadway, with occasional culverts to convey the water from them into the natural water-courses. Great care should be taken to prevent the surface-water from running down the side slopes, as they would soon be washed into gullies by it.

Very wet and marshy soils require to be thoroughly drained before the roadway can be made with safety. The best system that can be followed in such cases is to cut a wide and deep open main-drain on each side of the road, to convey the water to the natural water-courses. Covered cross drains should be made at frequent intervals, to drain the soil under the roadway. They should be sunk as low as will admit of the water running from them into the main drains, by giving a slight slope to the bottom each way from the centre of the road to facilitate its flow.

Independently of the drainage for marshy soils, they will require, when the subsoil is of a spongy, elastic nature, an artificial bed for the road covering. This bed may, in some cases, be formed by simply removing the upper stratum to a depth of several feet, and supplying its place with well-packed gravel, or any soil of a firm character. In other cases, when the subsoil yields readily to the ordinary pressure that the road-surface must bear, a bed of brushwood, from 9 to 18 inches in thickness, must be formed to receive the soil on which the road-covering is to rest. The brushwood should be carefully selected from the long straight slender shoots of the branches or undergrowth, and be tied up in bundles, termed *fascines*, from 9 to 12 inches in diameter, and from 10 to 20 feet long. The fascines are laid in alternate layers crosswise and lengthwise, and the layers are either connected by pickets, or else the withes, with which the fascines are bound, are cut to allow the brushwood to form a uniform and compact bed.

This method of securing a good bed for structures on a weak wet soil has been long practised in Holland, and experience has fully tested its excellence.

722. Road-coverings. The object of a road-covering being to diminish the resistances arising from collision and friction, and thereby to reduce the force of traction to the least practicable amount, it should be composed of hard and durable materials, laid on a firm foundation, and present a uniform, even surface.

The material in ordinary use for road-coverings is stone, either in the shape of blocks of a regular form, or of large round pebbles, termed a *pavement*, or broken into small angular masses; or in the form of gravel.

723. Pavements. The pavements in most general use in our country are constructed of rounded pebbles, known as *paving stones*, varying from 3 to 8 inches in diameter, which are set in a *form*, or bed of clean sand or gravel, a foot or two in thickness, which is laid upon the natural soil excavated to receive the form. The largest stones are placed in the centre of the roadway. The stones are carefully set in the form, in close contact with each other, and are then firmly settled by a heavy rammer until their tops are even with the general surface of the roadway, which should be of a slightly convex shape, having a slope of about $\frac{1}{8}$ from the centre each way to the sides. After the stones are driven, the road-surface is covered with a layer of clean sand, or fine gravel, two or three inches in thickness, which is gradually worked in between the stones by the combined action of the travel over the pavement and of the weather.

The defects of pebble pavements are obvious, and confirmed by experience. The form of sand or gravel, as usually made, is not sufficiently firm; it should be made in separate layers of about 4 inches, each layer being moistened and well settled either by ramming, or passing a heavy roller over it. Upon the form prepared in this way a layer of loose material of two or three inches in thickness may be placed to receive the ends of the paving stones. From the form of the pebbles, the resistance to traction arising from collision and friction is very great.

Pavements termed *stone tramways* have been tried in some of the cities of Europe, both for light and heavy traffic. They are formed by laying two lines of long stone blocks for the wheels to run on, with a pavement of pebble for the horse-track between the wheel-tracks. In crowded thoroughfares tramways offer but few if any advantages, as it is impracticable to confine the vehicles to them, and when exposed to heavy traffic they wear into ruts. The stone blocks should be carefully laid on a very firm bottoming, and particular attention is requisite to prevent ruts from forming between the blocks and the pebble pavement.

Stone suitable for pavements should be hard and tough, and not wear smooth under the action to which it is exposed. Some varieties of granite have been found in England to furnish the best paving blocks. In France, a very fine-grained compact gray sandstone of a bluish cast is mostly in use for the same purpose, but it wears quite smooth.

The sand used for forms should be clean and free from pebbles and gravel of a larger grain than about two-tenths of an

inch. The form should be made by moistening the sand, and compressing it in layers of about four inches in thickness, either by ramming, or by passing over each layer several times a heavy iron roller. Upon the top layer about an inch of loose sand may be spread to receive the blocks; the joints between which, after they are placed, should be carefully filled with sand.

The sand form, when carefully made, presents a very firm and stable foundation for the pavement.

Wooden pavements, formed of blocks of wood of various shapes, have been tried in England and several of our cities within the last few years, and notwithstanding they decay in a few years, yet they are extensively used in many of our large cities. The travel upon them is so free from noise, and the surface is so smooth, that, on those streets where the haulage of heavy articles is not excessive, many property holders prefer to renew a wooden pavement every eight or ten years, than be annoyed with the noise and the roughness of stone pavements. They are especially desirable upon those streets which are occupied by residences.

Asphaltic pavements have undergone a like trial, and have been found to fail after a few years' service. This material is farther objectionable as a pavement in cities where the pavements and sidewalks have frequently to be disturbed for the purposes of repairing, or laying down sewers, water-pipes, and other necessary conveniences for a city.

The best system of pavement is that which has been partially put in practice in some of the commercial cities of England, the idea of which seems to have been taken from the excellent military roads of the Romans, vestiges of which remain at the present day in a good state.




Fig. 226.—Paved road-covering.
A, pavement.
C, curb-stone.
B, flagging of side-walk.

In constructing this pavement, a bed (Fig. 226) is first prepared, by removing the surface of the soil to the depth of a foot or more, to obtain a firm stratum; the surface of this bed receives a very slight convexity, of about two inches to ten feet, from the centre to the sides of the roadway. If the soil is of a soft clayey nature, into which small fragments of

broken stone would be easily worked by the wheels of vehicles, it should be excavated a foot or two deeper to receive a form of sand, or of clean fine gravel. On the surface of the bed thus prepared, a layer of small broken stone, four inches thick, is laid; the dimensions of these fragments should not be greater than two and a half inches in any direction; the road is then opened to vehicles until this first layer becomes perfectly compact; care being taken to fill up any ruts with fresh stone, in order to obtain a uniform surface. A second layer of stone, of the same thickness as the first, is then laid on, and treated in the same manner; and finally a third layer. When the third layer has become perfectly compact, and is of a uniform surface, a layer of fine clean gravel, two and a half inches thick, is spread evenly over it to receive the paving stones. The blocks of stone are of a square shape, and of different sizes, according to the nature of the travelling over the pavement. The largest size are ten inches thick, nine inches broad, and twelve inches long; the smallest are six inches thick, five inches broad, and ten inches long. Each block is carefully settled in the form, by means of a heavy beetle; it is then removed in order to cover the side of the one against which it is to rest with hydraulic mortar; this being done, the block is replaced, and properly adjusted. The blocks of the different courses across the roadway should break joints. The surface of the road is convex; the convexity being determined by making the outer edges six inches lower than the middle, for a width of thirty feet.

This system of pavement fulfils in the best manner all the requisites of a good road-covering, presenting a hard even surface to the action of the wheels, and reposing on a firm bed formed by the broken-stone bottoming. The mortar-joints, so long as they remain tight, will effectually prevent the penetration of water beneath the pavement; but it is probable, from the effect of the transit of heavily-laden vehicles, and from the expansion and contraction of the stone, which in our climate is found to be very considerable, that the mortar would soon be crushed and washed out.

In France, and in many of the large cities of the continent, the *pavements are made with blocks of rough stone of a cubical form* measuring between eight and nine inches along the edge of the cube. These are laid on a form of sand of only a few inches thick when the soil beneath is firm; but in bad soils the thickness is increased to from six to twelve inches. The transversal joints are usually continuous, and those in the direction of the axis of the road break joints. In some cases

the blocks are so laid that the joints make an angle of 45° with the axis of the roadway, one set being continuous, the other breaking joints with them. By this arrangement of the joints, it is said that the wear upon the edges of the blocks, by which the upper surface soon assumes a convex shape, is diminished. It has been ascertained by experience that the wear upon the edges of the blocks is greatest at the joints which run transversely to the axis when the blocks are laid in the usual manner. From the experiments of M. Morin, to ascertain the influence of the shape of stone blocks on the force of traction, it was found that the resistance offered by a pavement of blocks averaging from five to six inches in breadth, measured in the direction of the axis of the roadway, and about nine inches in length, was less than in one of cubical blocks of the ordinary size.

Pavements in cities must be accompanied by *sidewalks* and *crossing-places for foot-passengers*. The sidewalks are made of large flat flagging-stone, at least two inches thick, laid on a form of clean gravel well rammed and settled. The width of the sidewalks will depend on the street being more or less frequented by a crowd. It would, in all cases, be well to have them at least twelve feet wide; they receive a slope, or pitch, of one inch to ten feet, towards the pavement, to convey the surface-water to the side channels. The pavement is separated from the sidewalk by a row of long slabs set on their edges, termed *curb-stones*, which confine both the flagging and paving stones. The curb-stones form the sides of the side channels, and should for this purpose project six inches above the outside paving stones, and be sunk at least four inches below their top surface; they should, moreover, be flush with the upper surface of the sidewalks, to allow the water to run over into the side channels, and to prevent accidents which might otherwise happen from their tripping persons passing in haste.

The crossings should be from four to six feet wide, and be slightly raised above the general surface of the pavement, to keep them free from mud.

724. Broken-stone Road-covering. The ordinary road-covering for common roads, in use in this country and Europe, is formed of a coating of stone broken into small fragments, which is laid either upon the natural soil, or upon a paved bottoming of small irregular blocks of stone. In England these two systems have their respective partisans; the one claiming the superiority for road-coverings of stone broken into small fragments, a method brought into vogue

some years since by Mr. McAdam, from whom these roads have been termed *macadamized*; the other being the plan pursued by Mr. Telford in the great national roads constructed in Great Britain within about the same period.

The subject of road-making has within the last few years excited renewed interest and discussion among engineers in France; the conclusion, drawn from experience, there generally adopted is, that a covering alone of stone broken into small fragments is sufficient under the heaviest traffic and most frequented roads. Some of the French engineers recommend, in very yielding clayey soils, that either a paved bottoming after Telford's method be resorted to, or that the soil be well compressed at the surface before placing the road-covering.

The paved bottom road-covering on Telford's plan (Fig. 225), is formed by excavating the surface of the ground to a suitable depth, and preparing the form for the pavement with the precautions as for a common pavement. Blocks of stone of an irregular pyramidal shape are selected for the pavement, which, for a roadway 30 feet in width, should be seven inches thick for the centre of the road, and three inches thick at the sides. The base of each block should not measure more than five inches, and the top not less than four inches.

The blocks are set by the hand, with great care, as closely in contact at their bases as practicable; and blocks of a suitable size are selected to give the surface of the pavement a slightly convex shape from the centre outwards. The spaces between the blocks are filled with chippings of stone compactly set with a small hammer.

A layer of broken stone, four inches thick, is laid over this pavement, for a width of nine feet on each side of the centre; no fragment of this layer should measure over two and a half inches in any direction. A layer of broken stone of smaller dimensions, or of clean coarse gravel, is spread over the wings to the same depth as the centre layer.

The road-covering, thus prepared, is thrown open to vehicles until the upper layer has become perfectly compact; care having been taken to fill in the ruts with fresh stone, in order to obtain a uniform surface. A second layer, about two inches in depth, is then laid over the centre of the roadway; and the wings receive also a layer of new material laid on to a sufficient thickness to make the outside of the roadway nine inches lower than the centre, by giving a slight convexity to the surface from the centre outwards. A coating of

clean coarse gravel, one inch and a half thick, termed a *binding*, is spread over the surface, and the road-covering is then ready to be thrown open to travelling.

The stone used for the pavement may be of an inferior quality, in hardness and strength, to that placed at the surface, as it is but little exposed to the wear and tear occasioned by travelling. The surface-stone should be of the hardest kind that can be procured. The gravel binding is laid over the surface to facilitate the travelling, whilst the under stratum of stone is still loose; it is, however, hurtful, as, by working in between the broken stones, it prevents them from setting as compactly as they would otherwise do.

If the roadway cannot be paved the entire width, it should, at least, receive a pavement for the width of nine feet on each side of the centre. The wings, in this case, may be formed entirely of clean gravel, or of chippings of stone.

For roads which are not much travelled, like the ordinary cross roads of the country, the pavement will not demand so much care; but may be made of any stone at hand, broken into fragments of such dimensions that no stone shall weigh over four pounds. The surface-coating may be formed in the manner just described.

725. In forming a *road-covering of broken stone alone*, the bed for the covering is arranged in the same manner as for the paved bottoming: a layer of the stone, four inches in thickness, is carefully spread over the bed, and the road is thrown open to vehicles, care being taken to fill the ruts, and preserve the surface in a uniform state until the layer has become compact; successive layers are laid on and treated in the same manner as the first, until the covering has received a thickness of about twelve inches in the centre, with the ordinary convexity at the surface.

726. **Gravel Roads.** Where *good gravel* can be procured the road-covering may be made of this material, which should be well screened, and all pebbles found in it over two and a half inches in diameter, should be broken into fragments of not greater dimensions than these. A firm level form having been prepared, a layer of gravel, four inches in thickness, is laid on, and, when this has become compact from the travel, successive layers of about three inches in thickness are laid on and treated like the first, until the covering has received a thickness of sixteen inches in the centre and the ordinary convexity.

The Superintending Engineer of Central Park, of New York City, Mr. W. H. Grant, made experiments upon Telford,

McAdam, and gravel roads in the Park, and he came to the conclusion that the gravel roads, as there constructed, were better for the purposes of park roads than either of the others. (*Journal of the Franklin Institute*, 1867. Vol. 84, p. 233.)

The gravel roads which were constructed by him had a rubble, or broken-stone foundation, over which was passed a very heavy roller; and upon which was placed layers of gravel which were thoroughly rolled. In some cases screened gravel was used, and in others gravel directly from the bed. Paved foundations for receiving the gravel make the road much more durable, although the original cost is considerably increased thereby. Roads of this kind, which are constantly used, should be frequently repaired, and the additional layers of gravel should be thoroughly pressed with a heavy roller. For detailed information, see *Journal of the Franklin Institute*, 1867. Vol. 83, pp. 100, 153, 233, 297 and 391, and Vol. 84, pp. 233 and 311.

727. As has been already stated, the French civil engineers do not regard a paved bottoming as essential for broken-stone road-coverings, except in cases of a very heavy traffic, or where the substratum of the road is of a very yielding character. They also give less thickness to the road-covering than the English engineers of Telford's school deem necessary; allowing not more than six to eight inches to road-coverings for light traffic, and about ten inches only for the heaviest traffic.

If the soil upon which the road-covering is to be placed is not dry and firm, *they compress it by rolling*, which is done by passing over it several times an iron cylinder, about six feet in diameter, and four feet in length, the weight of which can be increased, by additional weights, from six thousand to about twenty thousand pounds. The road material is placed upon the bed, when well compressed and levelled, in layers of about four inches, each layer being compressed by passing the cylinder several times over it before a new one is laid on. If the operation of rolling is performed in dry weather, the layer of stone is watered, and some add a thin layer of clean sand, from four to eight tenths of an inch in thickness, over each layer before it is rolled, for the purpose of consolidating the surface of the layer, by filling the voids between the broken-stone fragments. After the surface has been well consolidated by rolling, the road is thrown open for travel, and all ruts and other displacement of the stone on the surface are carefully repaired, by adding fresh material, and levelling the ridges by ramming.

Great importance is attached by the French engineers to the use of the iron cylinder for compressing the materials of a new road, and to minute attention to daily repairs. It is stated that by the use of the cylinder the road is presented at once in a good travelling condition; the wear of the materials is less than by the old method of gradually consolidating them by the travel; the cost of repairs during the first year is diminished; it gives to the road-covering a more uniform thickness, and admits of its being thinner than in the usual method.

The iron roller is now moved by a locomotive, to which it is attached by a suitable gearing, that admits of reversing, so as to travel backward and forward over the road surface.

728. Asphaltic Roadways and Sidewalks. In preparing roadways with an asphaltic surface, the ground or subsoil is first made level crosswise, and very compact, by rolling it with a heavy cylinder. Upon this a bed of hydraulic concrete, consisting of one part in volume of hydraulic mortar, to two and a quarter parts in volume of gravel, is laid to the thickness of two and a half inches. This foundation is allowed to become perfectly hard and dry before the asphalt is laid over it.

The asphaltic rock reduced to powder by the ordinary process is uniformly spread over the concrete bed, the surface of which should be thoroughly dry before receiving the mastic, to the depth of two to two and a half inches. This will produce a layer of packed material varying from one and three-quarters to two inches in thickness.

The packing is done with hot irons or pestles, worked by hand, and applied lightly, so as to produce a uniform smooth surface. After the upper bed is compressed in this manner to a proper thickness, a thin coat of fine dry powder, the siftings of earth or of mineral coal ashes, is spread over the surface to fill up inequalities, and the surface is again smoothed over by a flat-iron, heated nearly to a red heat; and, whilst the asphalt is still hot, it is rolled with polished iron rollers, the lighter, weighing four hundred and forty pounds, being first applied, and then a heavier, weighing three thousand pounds.

In recommencing work on an unfinished portion, the part to which the fresh material is to be joined is first thoroughly cleansed from dust, and hot asphalt poured over it.

For sidewalks the asphaltic rock is reduced to a powder, either by crushing it under rollers or by roasting; this is then sifted through wire gauze, with meshes of one-tenth of

an inch. This powder is thoroughly incorporated with hot mineral tar, in the usual way, in the proportions of about three hundred and thirty pounds of tar to four thousand four hundred pounds of powder. This mixture, termed mastic, can be cast into moulds of suitable size and kept for use.

To one hundred pounds of this mixture five or six pounds of mineral tar are added. A portion, about three per cent. of the mastic, of the mineral tar is first heated in an iron cylinder, and then one-third of the mastic thoroughly incorporated with it by stirring with an iron rod, one per cent. more of the tar is then added, and next another third of the mastic, and the remaining portions are stirred in in like manner. When the whole is melted one-half the gravel is stirred in, and then the remaining half in the same way.

In warm climates the mixture may receive a larger dose of gravel.

When the subsoil is compact and dry a layer of concrete of one inch and a half in thickness is spread over it, and covered by a layer of mortar half an inch thick; and over this, when thoroughly dry, a coat of one inch and six-tenths of the prepared mastic concrete.

When the soil is not hard, it should be rammed or rolled to make it so before receiving the hydraulic concrete, which, in this case, is three inches and a half thick, the other two courses being the same as before.

The mastic, whilst hot, is spread uniformly with wooden trowels over the mortar bed; and before it has cooled fine sand is sifted over the surface.

In some cases, instead of a bed of hydraulic concrete and mortar to receive the mastic concrete, one of hot gravel, mixed up with a small dose of mineral tar, is laid, and over this a layer of concrete mastic, formed of the fine siftings of mineral coal ashes, mixed up with heated mineral tar, is laid to form the top coating. This, in like manner, may receive a sifting of fine sand. Rollers are used in this case to give compactness to the bed and the upper layer.

729. Materials and Repairs. The materials for broken-stone roads should be hard and durable. For the bottom layer a soft stone, or a mixture of hard and soft, may be used, but on the surface none but the hardest stone will withstand the action of the wheels. The stone should be carefully broken into fragments of nearly as cubical a form as practicable, and be cleansed from dirt and of all very small fragments. The broken stone should be kept in depots at convenient points along the line of the road for repairs.

Too great attention cannot be bestowed upon keeping the road-surface free from an accumulation of mud and even of dust. It should be constantly cleaned by scraping and sweeping. The repairs should be daily made by adding fresh material upon all points where hollows or ruts commence to form. It is recommended by some that when fresh material is added, the surface on which it is spread should be broken with a pick to the depth of half an inch to an inch, and the fresh material be well settled by ramming, a small quantity of clean sand being added to make the stone pack better. When not daily repaired by persons whose sole business it is to keep the road in good order, general repairs should be made in the months of October and April, by removing all accumulations of mud, cleaning out the side channels and other drains, and adding fresh material where requisite.

The importance of keeping the road-surface at all times free from an accumulation of mud and dust, and of preserving the surface in a uniform state of evenness, by the daily addition of fresh material, wherever the wear is sufficient to call for it, cannot be too strongly insisted upon. Without this constant supervision, the best constructed road will, in a short time, be unfit for travel, and with it the weakest may at all times be kept in a tolerably fair state.

730. Cross Dimensions of Roads. A road thirty feet in width is amply sufficient for the carriage-way of the most frequented thoroughfares between cities. A width of forty, or even sixty feet, may be given near cities, where the greater part of the transportation is effected by land. For cross roads and others of minor importance, the width may be reduced according to the nature of the case. The width should be at least sufficient to allow two of the ordinary carriages of the country to pass each other with safety. In all cases, it should be borne in mind that any unnecessary width increases both the first cost of construction, and the expense of annual repairs.

Very wide roads have, in some cases, been used, the centre part only receiving a road-covering, and the wings, termed *summer roads*, being formed on the natural surface of the subsoil. The object of this system is to relieve the road-covering from the wear and tear occasioned by the lighter kind of vehicles during the summer, as the wings present a more pleasant surface for travelling in that season. But little is gained by this system under this point of view; and it has the inconvenience of forming during the winter a large quantity of mud, which is very injurious to the road-covering.

There should be at least one foot-path, from five to six feet wide, and not more than nine inches higher than the bottom of the side channels. The surface of the foot-path should have a pitch of two inches, towards the side channels, to convey its surface-water into them. When the natural soil is firm and sandy, or gravelly, its surface will serve for the foot path; but in other cases the natural soil must be thrown out to a depth of six inches, and the excavation be filled with fine clean gravel.

To prevent the foot-path from being damaged by the current of water in the side channels, its slide slope, next to the side channel, must be protected by a facing of good sods, or of dry stone.

As it is of the first importance, in keeping the road-way in a good travelling state, that its surface should be kept dry, it will be necessary to remove from it, as far as practicable, all objects that might obstruct the action of the wind and the sun on its surface. Fences and hedges along the road should not be higher than five feet; and no trees should be suffered to stand on the road-side of the side-drains, for independently of shading the road-way, their roots would in time throw up the road-covering.

731. Plank-Roads. Plank-roads were very popular a few years since. The road was carefully graded, then stringers—one on each side—were imbedded in the earth, and upon these were laid planks, three or four inches thick, forming a continuous floor. When the planks are new and well laid this makes a very agreeable road for haulage and for pleasure rides, but when the planks become worn and displaced it makes a very disagreeable road. As a general thing they have been abandoned, except in certain localities where they are maintained on account of peculiar circumstances. A good gravel road has been found to be more profitable, and in the long run makes a much better road. Many plank-roads have been changed to McAdam or to Telford roads.

II.

RAILWAYS.

732. A *railway*, or *railroad*, is a track for the wheels of vehicles to run on, which is formed of iron bars placed in two parallel lines and resting on firm supports.

733. Rails. The iron ways first laid down, and termed *tramways*, were made of narrow iron plates, cast in short

lengths, with an upright flanch on the exterior to confine the wheel within the track. The plates were found to be deficient in strength, and were replaced by others to which a vertical rib was added under the plate. This rib was of uniform breadth, and of the shape of a semi-ellipse in elevation. This form of tramway, although superior in strength to the first, was still found not to work well, as the mud which accumulated between the flanch and the surface of the plate presented a considerable resistance to the force of traction. To obviate this defect, iron bars of a semi-elliptical shape in



Fig. 227—Represents a cross-section *a*, of the fish-bellied rail of the Liverpool and Manchester Railway, and the method in which it is secured to its chair. The rail is formed with a slight projection at bottom, which fits into a corresponding notch in the side of the chair *b*. An iron wedge *c* is inserted into a notch on the opposite side of the chair, and confines the rail in its place.

elevation, which received the name of *edge-rails*, were substituted for the plates of the tramway. The cross-sections of these rails are of the form shown in Fig. 227, the top surface being slightly convex, and sufficiently broad to preserve the tire of the wheel from wearing unevenly. This change in the form of the rail introduced a corresponding one in the tires of the wheels, which were made with a flanch on the interior to confine them within the rails of the track.

The cast-iron edge-rail was found upon trial to be subject to many defects, arising from the nature of the material. As it was necessary to cast the rails in short lengths of three or four feet, the tract presented a number of joints, which rendered it extremely difficult to preserve a uniform surface. The rails were found to break readily, and the surface upon which the wheels ran wore unevenly. These imperfections finally led to the substitution of wrought iron for cast iron.

734. The wrought-iron rails first brought into use received nearly the same shape in cross-section and elevation as the cast-iron rail. They were formed by rolling them out in a rolling-mill so arranged as to give the rail its proper shape. The length of the rail was usually fifteen feet, the bottom of



Fig. 228—Represents a side elevation of a portion of a fish-bellied rail.

it (Fig. 228) presenting an undulating outline so disposed as to give the rail a bearing point on supports placed three feet apart between their centres. This form, known as the *fish-belly* rail, was adopted as presenting the greatest strength for

the same amount of metal. It has been found on trial to be liable to many inconveniences. The rails break at about nine inches from the supports, or one fourth of the distance between the bearing points, and from the curved form of the bottom of the rail they do not admit of being supported throughout their length.

735. The form of rail at present in most general use is known by the name of the *parallel*, or *straight* rail, the top and bottom of the rail being parallel; or as the T, or H rail, from the form of the cross-section.

A variety of forms of cross-section are to be met with in the parallel rail. The more usual form is that (Fig. 229) in

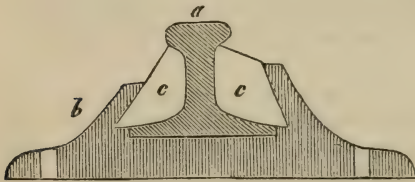


Fig. 229—Represents a cross-section *a* of a parallel rail of the form generally adopted in the U. States. The rail may be confined to its chair *b* by two wooden keys *c* on each side, which are formed of hard compressed wood. At the present time two iron straps are used instead of the keys *c*, which are firmly bolted to the rails. This form is called a fish-joint. In this case the projection *b* is omitted. A very great variety of *splices* are in use.

which the top is shaped like the same part in the fish-belly rail, the bottom being widened out to give the rail a more stable seat on its supports. In some cases the top and bottom are made alike to admit of turning the rail. The greatest deviation from the usual form is in the rail of the Great Western Railway in England (Fig. 230), and the Grand Trunk in Canada; but this form is rapidly going out of use.



Fig. 230—Represents a cross-section of the rail of the Great Western Railway in England. This rail is laid on a continuous support, and is fastened to it by screws on each side of the rail. A piece of tarred felt was inserted between the base of the rail and its support.

The dimensions of the cross-section of a rail should be such that the deflection in the centre between any two points of support, caused by the heaviest loads upon the track, should not be so great as to cause any very appreciable increase of resistance to the force of traction. The greatest deflection, as laid down by some writers, should not exceed three-hundredths of an inch for the usual bearing of three feet between the points of support. The top of the rail is usually about two and a half inches broad, and an inch in depth. This has been found to present a good bearing surface for the wheels, and sufficient strength to prevent the top from being crushed

by the weight upon the rail. The thickness of the rib varies between half an inch to three-fourths of an inch; and the total depth of the rail from three to five inches. The thickness and breadth of the bottom have been varied according to the strength and stability demanded by the traffic.

736. Steel Rails. Rails made entirely of *steel*, or of wrought iron, with a thin bar of steel forming the top surface, or *steel-top*, or *steel-headed* rails as they are termed, from their superior strength and durability, are coming into general use in replacing the worn-out wrought-iron rails of old roads. Steel obtained from any of the usual processes, either cast, puddled, or Bessemer steel, may be used for the steel heads of rails.

From the experience of Swedish engineers it appears that solid Bessemer steel rails of the best charcoal pig-iron may be made 10 per cent. lighter than the best English wrought-iron rails, a result which has been carried into practice on the Austrian railways.

The durability of iron rails appears to depend principally upon the perfection of the welding, the chief cause of their want of durability arising from the lamination caused by imperfect welding.

Formerly wrought-iron rails were made partly by hammering and partly by rolling. At present rolling alone is used, and the results are said to be more satisfactory, whilst the process of manufacture is more simple.

The resistance to wear of rails, from English experience, it is said, may be measured by the product of the speed and of the weight passing over them. The rule proposed for the work that rails may be subjected to is 220,000,000 tons transported at the rate of one mile per hour. The length of time that iron rails will last in any given case will be found by multiplying the number of tons transported by the rate of speed per hour and dividing by 220.

737. Supports. The rails are laid upon supports of timber or stone. The supports should present a firm, unyielding bed to the rails, so as to prevent all displacement, either in a lateral or a vertical direction, from the pressure thrown upon them.

Considerable diversity is to be met with in the practice of engineers on this point. On the earlier roads, heavy stone blocks were mostly used for supports, but these were found to require great precautions to render them firm, and they were, moreover, liable to split from the means taken to confine the rails to them. Timber is generally preferred to stone. It

affords a more agreeable road for travel, and gives a better lateral support to the rails than stone blocks, and the wear upon the locomotive and other machinery is less severe.

The usual method of placing timber supports is transversely to the track, each support, termed a *sleeper*, or *cross-tie*, being formed of a piece of timber six or eight inches square. The ordinary distance between the centre lines of the supports is three feet for rails of the usual dimensions. With a greater bearing, rails of the ordinary dimensions do not present sufficient stiffness. The sleepers, when formed of round timber, should be squared on the upper and lower surface. On some of the recent railways in England, sleepers presenting in cross section a right-angled triangle have been used, the right angle being at the bottom. They are represented to be more convenient in setting, and to offer a more stable support than those of the usual form. The sleepers are placed either upon the ballasting of the roadway, or upon longitudinal beams laid beneath them along the line of the rails. The latter is indispensable upon new embankments to prevent the ends of the sleepers from settling unequally. Thick plank, about eight inches broad and three or four inches thick, is usually employed for the longitudinal supports of the sleepers.

On some of the more recent railways in England, the rails have been laid upon longitudinal beams, presenting a continuous support to the rail, the beams resting upon cross-ties.

738. Ballast. A covering of broken stone, of clean coarse gravel, or of any other material that will allow the water to drain off freely, is laid upon the natural surface of the excavations and embankments, to form a firm foundation for the supports. This has received the appellation of the *ballast*. Its thickness is from nine to eighteen inches. Open or broken-stone drains should be placed beneath the ballasting to convey off the surface water. The parts of the ballasting upon which the supports rest should be well rammed, or rolled; and it should be well packed beneath and around the supports. After the rails are laid, another layer of broken stone or gravel should be added, the surface of which should be slightly convex and about three inches below the top of the rails.

739. Temporary Railways of Wood and Iron. On the first introduction of railways into the United States, the tracks were formed of flat iron bars laid upon longitudinal beams. The iron bars were about two and a half inches in breadth, and from one-half to three-fourths of an inch in thickness, the top surface being slightly convex. They were placed on the

longitudinal beams, a little back from the inner edge, the side of the beam near the top being bevelled off, and were fastened to the beam by screws or spikes, which passed through elliptical holes with a countersink to receive the heads of the spikes; the holes receiving this shape to allow of the contraction and expansion of the bar, without displacing the fastenings. The longitudinal beams were supported by cross sleepers, with which they were connected by wedges that confined the beams in notches cut into the sleepers to receive them. The longitudinal beams were usually about six inches in breadth, and nine inches in depth, and in as long lengths as they could be procured. The joints between the bars were either square or oblique, and a piece of iron or zinc was inserted into the beams at the joint, to prevent the end of the rail from being crushed into the wood by the wheels.

In some instances the bars were fastened to long stone blocks, but this method was soon abandoned, as the stone was rapidly destroyed by the action of the wheels; besides which, the rigid nature of the stone rendered the travelling upon it excessively disagreeable.

This system of railway, whose chief recommendation is economy in the first cost, has gradually given place to the solid rail. Besides the want of durability of the structure, it does not possess sufficient strength for a heavy traffic.

740. Gauge. The distance between the two lines of rails of a track, termed the *gauge*, which has been adopted for the great majority of the railways in England, and also with us, is 4 feet 8½ inches. This gauge appears to have been the result of chance, and it has been followed in the great majority of cases up to the present time, owing to the inconvenience that would arise from the adoption of a different gauge upon new lines. The greatest deviation yet made from the established gauge is in that of the Great Western Railway, in which the gauge is seven feet. Engineers are generally agreed that with a wider gauge the wheels of railway cars could be made of greater diameter than they now receive, and be placed outside of the cars instead of under them as at present; the centre of gravity of the load might be placed lower, and more steadiness of motion and greater security at high velocities be attained. All roads having a gauge above 4 feet 8½ inches are inclined rather to reduce them to that gauge or use a third rail so as to run the cars of that gauge over their own.

Within the last four or five years the subject of roads of *very narrow gauge* has been much discussed. The advan-

tages principally claimed for roads of this kind are: 1st, great reduction in first cost; 2d, allowing steeper grades and curves of smaller radius; 3d, less wear and tear on the road on account of the rolling stock being much lighter; 4th, the ratio of live to dead weight is much less. Some lines have been made with a $2\frac{1}{2}$ -foot gauge, but the advocates of narrow gauge generally recommend a 3-foot gauge. The latter is the gauge of the Denver and Texas narrow-gauge road.

In a double track the distance between the two tracks is generally the same as the gauge; and the distance between the outside rail of a track, and the sides of the excavation, or embankment, is seldom made greater than six feet, as this is deemed sufficient to prevent the cars from going over an embankment were they to run off the rails.

741. On all straight portions of a track, the supports should be on a level transversely, and parallel to the plane of the track longitudinally. The top surface of the rail should incline inward, to conform to the conical form of the wheels; this is now usually effected by giving the chair the requisite pitch, or by forming the top surface with the requisite bevel for this purpose.

742. Curves. In the curved portions of a track the centrifugal force tends to force the carriage towards the outside rail of the curve, and by elevating the outer rail the force of gravity tends to draw it towards the inside rail. From the above conditions of equilibrium the elevation which the exterior rail should receive above the interior can be readily calculated. The method adopted is to give the exterior rail an elevation sufficient to prevent the flanch of the wheel from being driven against the side of the rail when the car is moving at the highest supposed velocity; or, in other words, to give the inclined plane across the track, on which the wheels rest, an inclination such that the tendency of the wheels to slide towards the interior rail shall alone counteract the centrifugal force.

743. Sidings, etc. On single lines of railways short portions of a track, termed *sidings*, are placed at convenient intervals along the main track, to enable cars going in opposite directions to cross each other, one train passing into the siding and stopping while the other proceeds on the main track. On double lines arrangements, termed *crossings*, are made to enable trains to pass from one track into the other, as circumstances may require. The position of sidings and their length will depend entirely on local circumstances, as the length of the trains, the number daily, etc.

The manner generally adopted, of connecting the main track with a siding, or a crossing, is very simple. It consists (Fig. 231) in having two short lengths of the opposite rails

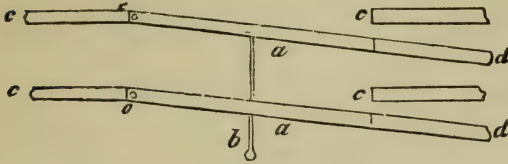


Fig. 231 — Represents the sliding switches, or rails, for connecting a siding with the main track.

a, a, rails connected by an iron rod *b*, by which they can be turned around the joints *o, o*.

c, c, rails of main track.
d, d, rails of siding.

of the main track, where the siding or crossing joins it, movable around one of their ends, so that the other can be displaced from the line of the main track, and be joined with that of the siding, or crossing, on the passage of a car out of the main track. These movable portions of rails are connected and kept parallel by a long cross-bolt, to the end

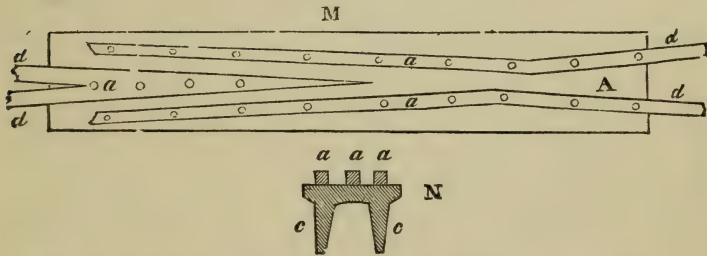


Fig. 232—Represents a plain *M*, and section *N*, of a fixed crossing plate. The plate *A* is of cast-iron, with vertical ribs *c, c*, on the bottom, to give it the requisite strength. Wrought-iron bars *a, a*, placed in the lines of the two intersecting rails *d, d*, are firmly screwed to the plate; a sufficient space being left between them and the rails for the flanch of the wheel to pass.

of which a vertical lever is attached to draw them forward, or shove them back.

At the point where the rails of the two tracks intersect, a cast-iron plate, termed a *crossing-plate* (Fig. 232), is placed to connect the rails. The surface of the plate is arranged either with grooves in the lines of the rails to admit the flanch of the wheel in passing, the tire running upon the surface of the plate; or wrought-iron bars are affixed to the surface of the plate for the same purpose.

The angle between the rails of the main tracks and those of a siding or crossing, termed the *angle of deflection*, should not be greater than 2° or 3° . The connecting rails between

the straight portions of the tracks should be of the shape of an S curve, in order that the passage may be gradually effected. At the present time switch rails and frogs of peculiar construction are in use, which are so made and arranged as to leave the main track unbroken, so that if the switch is wrongly placed the train on the main track will not run off. There are many devices for securing this result.

744. Turn-plates. Where one track intersects another under a considerable angle, it will be necessary to substitute for the ordinary method of connecting them, what is termed a *turn-plate*, or turn-table. This consists of a strong circular platform of wood or cast iron, movable around its centre by means of conical rollers beneath it running upon iron roller-ways. Two rails are laid upon the platform to receive the car, which is transferred from one track to the other by turning the platform sufficiently to place the rails upon it in the same line as those of the track to be passed into.

745. Street crossings. When a track intersects a road, or street, upon the same level with it, the rail must be guarded by cast-iron plates laid on each side of it, sufficient space being left between them and the rail for the play of the flanch. The top of the plates should be on a level with the top of the rail. Wherever it is practicable a drain should be placed beneath, to receive the mud and dust which, accumulating between the plates and rail, might interfere with the passing of the cars along the rails.

746. Gradients. From various experiments upon the friction of cars upon railways, it appears that the angle of repose is about $\frac{1}{250}$, but that in descending gradients much steeper, the velocity due to the accelerating force of gravity soon attains its greatest limit and remains constant, from the resistance caused by the air.

The limit of the velocity thus attained upon gradients of any degree, whether the train descends by the action of gravity alone, or by the combined action of the motive-power of the engine and gravity, can be readily determined for any given load. From calculation and experiment it appears that heavy trains may descend gradients of $\frac{1}{100}$, without attaining a greater velocity than about 40 or 50 miles an hour, by allowing them to run freely without applying the brake to check the speed. By the application of the brake, the velocity may be kept within any limit of safety upon much steeper gradients. The only question, then, in comparing the advantages of different gradients, is one of the comparative cost between the loss of power and speed, on the one hand, for

ascending trains on steep gradients, and that of the heavy excavations, tunnels, and embankments on the other, which may be required by lighter gradients.

In distributing the gradients along a line, engineers are generally agreed that it is more advantageous to have steep gradients upon short portions of the line, than to overcome the same difference of level by gradients less steep upon longer developments.

747. *In steep gradients*, where locomotive power cannot be employed, stationary power is used, the trains being dragged up, or lowered, by ropes connected with a suitable mechanism, worked by stationary power placed at the top of the plane. The inclined planes, with stationary powers, generally receive a uniform slope throughout. The portion of the track at the top and bottom of the plane should be level for a sufficient distance back, to receive the ascending or descending trains. The axes of the level portion should, when practicable, be in the same vertical plane as that of the axis of the inclined plane.

Small rollers, or sheeves, are placed at suitable distances along the axis of the inclined plane, upon which the rope rests.

Within a few years back flexible bands of rolled hoop-iron have been substituted for ropes on some of the inclined planes of the United States, and have been found to work well, presenting more durability and being less expensive than ropes.

On very steep gradients the expedient of a third rail in the centre of the track, and raised rather above the plane of the other two rails, has been used. Two horizontal wheels underneath the locomotive run on this rail, and may be tightened to any desirable degree of compression on it. In this way a gradient of 440 feet per mile is used over Mont Cenis. Without the intermediate rail grades as steep as 280, and in one case 304 feet per mile, have been ascended by means of the adhesive power of the locomotive only. But such grades will never be sought; on the other hand, they will be avoided when possible. Grades of 50 and 60 feet to the mile are very common. The maximum grade allowable by law on the Central Pacific Railroad is the same as that of the Baltimore and Ohio Railroad, viz., 116 feet per mile.

748. Tunnels. The choice between deep cutting and tunnelling, will depend upon the relative cost of the two, and the nature of the ground. When the cost of the two methods

would be about equal, and the slopes of the deep cut are not liable to slips, it is usually more advantageous to resort to deep cutting than to tunnelling. So much, however, will depend upon local circumstances, that the comparative advantages of the two methods can only be decided upon understandingly when these are known.

749. The operations in Tunnelling will depend upon the nature of the soil. The work is commenced by setting out, in the first place, with great accuracy upon the surface of the ground, the profile line contained in the vertical plane of the axis of the tunnel. At suitable intervals along this line vertical pits, termed *working shafts*, are sunk to a level with the top, or crown of the tunnel. The shafts and excavations, which form the entrances to the tunnel, are connected, when the soil will admit of it, by a small excavation termed a *heading*, or *drift*, usually five or six feet in width, and seven or eight feet in height, which is made along the crown of the tunnel. After the drift is completed, the excavation for the tunnel is gradually enlarged; the excavated earth is raised through the working shafts, and at the same time carried out at the ends. The dimensions and form of the cross section of the excavation will depend upon the nature of the soil and the object of the tunnel as a communication. In solid rock the sides of the excavation are usually vertical; the top receives an arched form; and the bottom is horizontal. In soils which require to be sustained by an arch, the excavation should conform as nearly as practicable to the form of cross section of the arch.

In tunnels through unstratified rocks, the sides and roof may be safely left unsupported; but in stratified rocks there is danger of blocks becoming detached and falling; wherever this is to be apprehended, the top of the tunnel should be supported by an arch.

Tunnelling in loose soils is one of the most hazardous operations of the miner's art, requiring the greatest precautions in supporting the sides of the excavations by strong rough framework, covered by a sheathing of boards, to secure the workmen from danger. When in such cases the drift cannot be extended throughout the line of the tunnel, the excavation is advanced only a few feet in each direction from the bottom of the working shafts, and is gradually widened and depended to the proper form and dimensions to receive the masonry of the tunnel, which is immediately commenced below each working shaft, and is carried forward in both directions towards the two ends of the tunnel.

750. Masonry of Tunnels. The cross section of the arch of a tunnel (Fig. 233) is usually an oval segment, formed of

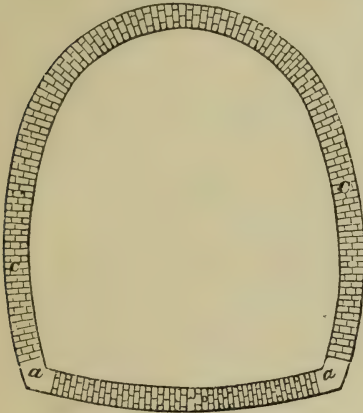


Fig. 233—Represents the general form of the cross section *c* of a brick arch for tunnels.
a, a, askew-back stone between the sides of the arch and the bottom inverted arch.

arcs of circles for the sides and top, resting on an inverted arch at bottom. The tunnels on some of the recent railways in England are from 24 to 30 feet wide, and of the same height from the level of the rails to the crown of the arch. The usual thickness of the arch is eighteen inches. Brick laid in hydraulic cement is generally used for the masonry, an askew-back course of stone being placed at the junction of the sides and the inverted arch. The masonry is constructed in short lengths of about twenty feet, depending, however, upon the precautions necessary to secure the sides of the excavation. As the sides of the arch are carried up, the framework supporting the earth behind is gradually removed, and the space between the back of the masonry and the sides of the excavation is filled in with earth well rammed. This operation should be carefully attended to throughout the whole of the backing of the arch, so that the masonry may not be exposed to the effects of any sudden yielding of the earth around it.

751. The earth at the ends of the tunnel is supported by a retaining wall, usually faced with stone. These walls, termed the *fronts* of the tunnel, are generally finished with the usual architectural designs for gateways. To secure the ends of the arch from the pressure of the earth above them, cast-iron plates of the same shape and depth as the top of the arch, are inserted within the masonry, a short distance from

the ends, and are secured by wrought-iron rods firmly anchored to the masonry at some distance from each end.

752. The working shafts, which are generally made cylindrical and faced with brick, rest upon strong curbs of cast iron, inserted into the masonry of the arch. The diameter of the shaft within is ordinarily nine feet.

753. The ordinary difficulties of tunnelling are greatly increased by the presence of water in the soil through which the work is driven. Pumps, or other suitable machinery for raising water, placed in the working shafts, will in some cases be requisite to keep them and the drift free from water until an outlet can be obtained for it at the ends, by a drain along the bottom of the drift. Sometimes, when the water is found to gain upon the pumps at some distance above the level of the crown of the tunnel, an outlet may be obtained for it by driving above the tunnel a drift-way between the shafts, giving it a suitable slope from the centre to the two extremities to convey the water off rapidly.

In tunnels for railways, a drain should be laid under the ballasting along the axis, upon the inverted arch of the bottom.

Tunnelling in rock is greatly facilitated at the present day by power-drilling-machines, which are driven by compressed air. By this means they are able to advance three times as fast as by hand labor. The compressed air greatly facilitates ventilation. The Mont Cenis tunnel (nearly 7 miles long) and the Hoosac tunnel (about 4 miles long) have been driven in this way, and the St. Godard tunnel (nearly 13 miles long) is now in process of construction on the same plan.

754. The following extracts are made from a series of papers, published in the *London Engineering*, from Oct. 7, 1870, to December 30, 1870, giving a translation of a work by Baron von Weber, Director of the State Railways of Saxony, with running comments by the translator, detailing the experiments made by the author, and giving his deductions from them, on the *Stability of the Permanent Way*.

Baron von Weber desired, in the first place, to ascertain what was the *minimum* thickness which would be given to the web of a rail, in order that the latter might still possess a greater power of resistance to lateral forces than the fastenings by which it was secured to the sleepers.

755. **Resistance of Rail to Lateral Forces.** From the experiments the result was deduced, that the least thickness ever given to the webs of rails in practice is more than sufficient, and that if it were possible to roll webs $\frac{1}{4}$ in. thick, such webs would be amply strong, if it were not that there

would be a chance of their being torn at the points where they are traversed by the fish-plate bolts. Baron von Weber concludes that webs $\frac{3}{8}$ in. or $\frac{1}{2}$ in. thick are amply strong enough for rails of any ordinary height, and that in fact the webs should be made as thin as the process of rolling, and as the provision of sufficient bearing for the fish-plate bolts will permit.

756. Stability of the Permanent Way. The stability of a permanent way structure in a longitudinal direction, is considered by Baron von Weber as depending upon the bedding of the sleepers in the ballast, the friction of the rails upon the sleepers, the strength of the spikes or other fastenings, and, lastly, upon the strength of the connections between the ends of the rails. These connections have, in the first place, to keep the heads of the rails in their proper position with regard to each other; next, to give to the joint a certain amount of rigidity; and finally, to insure that the horizontal or vertical deflections of the two rails connected take place together. Of the many forms of connections which have from time to time been proposed for rails, but two practically fulfil the conditions just mentioned, these two being the joint chair and the fish-joint, in their various modifications and forms.

We now come to the researches made by Baron von Weber to determine the power of permanent way structures to resist forces tending to displace the entire system. Baron von Weber states that as the speed of trains was increased on German railways, there was noticed a peculiar and dangerous displacement of the permanent way, this displacement taking place chiefly where trains pass from straight to curved portions of the line, or from curved portions to level and straight lengths, over which they passed at an increased speed. It was also observed that the displacements at the first-mentioned points—displacements which consisted in the shifting of the line towards the convex side of the curves—were caused principally by engines having long wheel bases and a comparatively light load on the leading wheels; while the displacement of the straight portions of the lines was due mainly to the action of powerful engines with short wheel bases and considerable overhang on each end. In this latter case the horizontal oscillations which produced the displacements were almost always found to arise from the effect of vertical impact due to a loose joint or some local settlement in the line, the engine being thus not merely caused to lurch heavily sideways, but being also made to oscillate in a vertical plane, thus alternately relieving and increasing the loads on the leading

and trailing wheels. Under these circumstances, when the flange of the leading wheel struck the rail laterally at the same time that the load on the latter was decreased by the momentary relief of the leading wheel from a portion of the weight it ought to carry, there was a greater displacement than there otherwise would have been owing to the diminished friction between the permanent way structure and its foundation. Both the classes of displacements to which we have referred were found to be less in permanent way structures possessing considerable vertical rigidity than in those of a more flexible character.

757. Experiments on the Power of Permanent Way-structures to resist Horizontal Displacements of the entire System. These experiments were made to obtain answers to the five following questions:—

a. What is the resistance offered by a well-bedded sleeper of average size against lateral displacement in the ballast?

b. What is the resistance of the whole structure against displacement at one point, and what is the influence of the ballast and bedding, on and in which the structure rests, upon this resistance?

c. How far does the filling against the ends of the sleepers increase this resistance?

d. To what extent is the resistance to lateral displacement increased by the load on the structure?

e. How far does the application of piles or stones, etc., etc., increase this resistance?

The deductions to be made from the experiments referring to questions *a* and *b*, Baron von Weber considers to be as follows: 1st. The resistance of unloaded well-bedded permanent way-structures is comparatively small, a lateral pressure of from 30 to 50 centners being sufficient to break the connection between the sleeper and the ground. This pressure is less than that which would be exerted by the centrifugal force due to the passage of a 25-ton locomotive through a curve of 1,000 feet radius, at a speed of 30 miles per hour, supposing that this centrifugal force was not counteracted by superelevation of the exterior rail. 2d. The nature of the ballast in which the sleepers of unloaded permanent way-structures are bedded has no important influence on the resistance to lateral displacement. 3d. The pressure requisite for producing the horizontal displacement of an unloaded structure increases until this displacement has reached a certain amount, generally between 12 and 18 millimetres (from 0.472 in. to 0.708 in.), when the further displacement

up to 50 to 75 millimetres (2 in. to 3 in.) is produced without any considerable augmentation in the pressure, until finally a considerable tension is set up in the different parts of the structure.

Baron von Weber's conclusions from the experiments referring to question *c* are as follows: 1st. That the filling of ballast against the ends of the sleepers, up to the top surface of the latter, has an insignificant influence upon the resisting power of the structure to lateral displacement, particularly if the structure is unloaded, and if a one-sided tilting is possible. 2d. That if the ballast is not filled against the ends of the sleepers, the elasticity of the rails will bring back the structure into its original position, on the removal of the pressure, even after considerable displacement, as in this case small portions of ballast cannot fall between the end of the shifted sleeper and the undisturbed end filling, as is the case when the practice of filling up against the ends is followed.

We now come to the experiments made by Baron von Weber to obtain an answer to question *d*. It was, of course, requisite, in order that a proper comparison might be instituted, that these experiments should be conducted under circumstances as nearly as possible identical with those which existed when the resistance of displacement of the unloaded structure was investigated; and in selecting portions of permanent way for the last-mentioned experiments, therefore, such lengths were chosen as would afford space for the experiments with the loaded structure, without introducing any variations in bedding, firmness of the ballast, etc., etc.

The results of seven sets of trials show that the resistance of the structure to lateral displacement was increased almost tenfold by the load of twenty-seven tons; and that lateral pressures which produced in the unloaded structure displacements entirely inadmissible in practice, did not affect the loaded structure in any perceptible degree. The portion of the unloaded structure shifted by the press in the above experiments weighed almost exactly $2\frac{1}{2}$ tons, while the total mass moved, including the filling against the ends of the sleepers, weighed 3 tons; and taking this into consideration, it appeared as if the resistance to displacement varied directly—as indeed it might have been supposed it would do—as the weight resting on the ground.

Baron von Weber's conclusion with regard to this subject is, that the force required to produce the lateral displacement of a permanent way-structure is directly proportionate

to the weight by which the structure is pressed upon the ground.

753. Experiments relating to Question e. In considering the influence of piles or stakes driven into the ballast against the ends of the sleepers to prevent lateral shifting of the latter, Baron von Weber remarks that the resisting power of such piles has been very differently "estimated" by railway engineers, but that as far as he is aware the advantages or disadvantages attending the use of such piles has never been ascertained by experiment. Many elements evidently exercise an influence on the lateral displacement of piles driven vertically into the ground, and experiments made with a view of ascertaining the lateral resistance of such piles can only show in a very general manner how far the advantages derived from their use will counterbalance the extra expense they involve. The results obtained by experiment are moreover liable to great variations. Thus, a pile driven deeply into solid, loamy soil, offers in dry weather great resistance to lateral displacement, whereas after a shower of rain—not strong enough to soak into the ground, but capable of penetrating the narrow crack formed between the pile and surrounding earth by the vibrations caused by the traffic—the upper end of the pile can be moved, by the application of a comparatively small force, to an extent sufficient to render it useless as a means of lateral support for the sleeper. Thus Baron von Weber has found that piles which, in dry weather, require a force of from 15 to 20 cwt. to shift their heads laterally through a distance of one inch, could be moved to the same extent by the force of about 5 cwt. after a shower of rain lasting barely one hour.

The elements by which the lateral stability of such piles as those we are now considering is affected are: the diameter, length, and section of the pile, the description of wood of which it is made, and the nature of ground into which it is driven. To determine the influence of all these elements in their various combinations a very extensive series of experiments would have been required, and Baron von Weber therefore confined his researches to ascertaining the maximum resistance of such stakes as are used on the Saxon state railways, availing himself, however, of all available opportunities of noticing the resistance under unfavorable circumstances.

The principle was laid down that a displacement of the top of a pile to the extent of 10 millimetres (≈ 0.39 in.) should be considered as inconsistent with its further usefulness.

In this series of trials the pressure acted against a number of oak stakes, some of round and some of square section, and varying from 2 ft. 11½ in. to 3 ft. 11¼ in. long. The ground was solid sand or mixed gravel, and some of the stakes had been in use for a considerable time, while others were driven expressly for the experiments. The results showed that a pressure of from 3 cwt. to 5 cwt. was quite sufficient to produce the lateral displacement of 10 millimetres (=0.39 in.) whilst a pressure of 7 cwt. almost forced the stakes out of the ground. These experiments showed, therefore, that in ground of this kind piles driven against the ends of the sleepers could not exercise the least influence upon the stability of the permanent way-structure.

In these trials the pressure acted against a pile 4 in. in diameter and 2 ft. 11½ in. long, driven into a heavy loamy ballast, which had been laid down about ten years over the broken-stone bedding of an old line. The results which we subjoin show that the resisting power of such a pile would be of but little use for increasing the lateral stability of the structure.

Three trials were made on a pile 4 in. square and 4 ft. 11 in. long, driven into the same ground as the pile tested in the last series of experiments.

The results showed that the length and section of the pile exercise an important influence on its resistance to lateral pressure. It was found in these last two series of experiments that when the displacement of the piles became great, the ground behind them cracked radially and rose considerably; while, when the cracks reached certain dimensions, it was found that no increase of pressure was required to produce a further displacement of the piles.

Baron von Weber's conclusions, drawn from the experiments relating to question *e*, are as follows: 1st. That the resistance of piles driven into sandy or other light ground is so insignificant that the use of such piles under such circumstances will not produce an increased stability of the structure against lateral displacement; 2d. That the resistance of piles driven into heavy solid ground is much greater than that of piles driven into sandy ground; but that even in the former case the piles must be driven rather closely if they are to afford any efficient resistance to small lateral displacements of the permanent way-structure; 3d. The resisting power of piles, and especially their resistance to small displacements, increasing with their length, and in a more rapid ratio than the latter, it is considered that no piles, to produce an effect

commensurate with their cost, should have a length of less than 5 ft.; and 5th. The signs of considerable displacements of piles may, under certain circumstances, disappear after the causes of these displacements have been removed, without, however, the piles regaining their former stability.

759. Experiments to determine the power of permanent way-structures to resist the loosening of the rails from the sleepers. It is remarked by Baron von Weber that in investigating the stability of the connection between rails and sleepers, it has to be borne in mind that the resistance of the rails to displacement depends upon three things, viz.: First, the holding power of the fastenings (bolts, spikes, etc., etc.) by which the rails are secured to the sleepers; second, to the increased friction between the base of the rails and the sleepers which is caused by a load standing on the rails; and, third, by the friction between the rails and the wheels, this friction causing the axles to form ties between the two lines of rails on which their wheels rest. It will thus be seen that the gauge of a line of rails is preserved not merely by the fastenings securing the rails to the sleepers, but also by other forces of considerable importance acting both on the top and bottom of the rails.

The passage of the rolling stock is considered by Baron von Weber to produce on the rails the following effects:—

1. Under all circumstances a vertical pressure tending to force the rails into the sleepers, the latter yielding to this force in all cases where they are not made of materials of very high resisting powers, such as stone or iron. Wooden sleepers are of course compressed by the vertical pressure of the trains, and one point to be determined, therefore, is—

760. (e) *To what extent are sleepers of various forms and materials compressed by the loads acting on the rails?*

2. There is a horizontal pressure resulting, in the case of curves, partly from centrifugal force and partly from the rigidity of the rolling stock, and, in the case of straight lines, from the oscillation of the vehicles. This horizontal pressure—which may, however, change into a pressure acting at a more or less acute angle to the surface of the sleepers—tends to alter the position of the rail on the sleeper in two ways, namely: first, by shifting the rail on the sleeper without altering the inclination of the former; and, second, by canting the rail and causing it to turn on a point situated more or less near to its outer edge, according to the compressibility of the sleeper. The first of these two kinds of displacement is resisted by the horizontal resistance of the

spikes or other fastenings, by the friction between the wheel and the rail, and by the friction between the base of the rail and the sleeper, and the question to be answered by the experiments relating to this kind of displacement, therefore, is—

761. (*f*) *What power is required to displace a fastened and loaded rail horizontally on its sleepers?*

The second kind of displacement just mentioned, or canting of the rails outwards, is resisted by the direct holding power of the fastenings connecting the rail to the sleeper, and by the friction between the wheel and rail. The questions to be answered by the investigations relating to this matter, therefore, are—

(*g*) *What force is required to draw the spikes out of the sleepers?* and

(*h*) *What force is required to overcome the combined resistance due to the holding power of the spikes in the sleepers, and the friction between the rails and wheels?*

The following sets of experiments were carried out by Baron von Weber, in order to obtain answers to the above questions:—

The most striking result obtained is the deterioration of the sleepers under the influence of the traffic at the points where the rails rest upon them. Thus it will be seen that in the case of the fir sleepers the average compressions under the load, at the unused and old bearing surfaces respectively, were 5.3 and 9.7 mils.; while the average permanent compressions were 1.1 and 2.6 mils., the latter results being about double the former.

Another remarkable result is the actual amount of the compression, this amount averaging as much as 5.3 millimetres (= 0.208 in.) for new and sound fir sleepers, and 9.7 millimetres (= 0.382 in.) for fir sleepers averaging five years old. Baron von Weber considers that these results point to the necessity of employing rigid rails, so as to distribute the effects of the pressure of the rolling stock as far as possible over a number of supports, and that they also show the advantage of employing sleepers of hard timber.

The results of the first group of experiments relating to question (*e*) Baron von Weber summarizes as follows:—

1. That sound fir sleepers 140 millimetres (= 5.5 in.) thick and 200 millimetres (= 7.87 in.) wide are compressed, on an average, one millimetre (0.039 in.) by a load of 5.6 kilogrammes per square centimetre (= 79.6 lb. per square inch), it being supposed that they have not before been subjected to

such a load. At places where rails have already been bearing upon the sleepers for some time, this compression is increased to one millimetre for each load of 4 kilogrammes per square centimetre (=56.88 lb. per square inch).

2. The action of the trains increases considerably the compressibility of the sleepers at the points where the rails bear upon them.

3. That the compressibility of wooden sleepers—and especially of fir sleepers—is so great, that it is necessary to distribute the pressure of the trains upon the sleepers as far as possible by the employment of rigid rails.

4. That increasing the number of sleepers in order to increase the carrying power of a permanent way, is, theoretically and economically, a wrong mode of obtaining that end.

5. That in the event of lateral pressure being brought to bear against the head of the rail, the resisting power of fir sleepers is not sufficiently great to prevent a canting of the rail consequent upon the impression of one side of the base into the sleeper. Hence momentary alterations in the gauge are allowed, these alterations disappearing, however, on the removal of the lateral pressure, and leaving no traces on the spikes, sleepers, or rails.

6. The compression of fir sleepers under the bases of the rails is so great that the cellular structure of the wood is slowly destroyed, and a cutting or indentation of the sleepers at the points of bearing takes place, this action being accelerated when the upper fibres of the wood have been more or less deprived of their elasticity by the action of the weather.

The above conclusions are justified by Baron von Weber's further investigations.

Baron von Weber's deductions from the second group of experiments relating to question (e) are as follows:—

1. When the influence of the rigidity of the rail, etc., upon the transference of the pressure of the rolling load to the sleeper is taken into account, it may be considered that the compression of the sleeper itself takes place in the same manner under the action of either a steadily applied or a rolling load.

2. That the sinking of well-bedded sleepers into the ground on which they rest is proportionately insignificant even under the action of considerable rolling stock.

3. That if the base of the rail has a bearing surface of 220 square centimetres (= 32½ square inches) upon a sound fir sleeper between four and six years old, and 140 millimetres

(= 5.5 inches) thick, a load of 1,500 kilogrammes applied through the rail will compress the sleeper one millimetre. Or, in other words, a load of about 7 kilogrammes per square centimetre (= 99.54 lb. per square inch) will produce the compression just mentioned on those parts of the sleepers which have already been frequently exposed to that during a considerable time.

Although the series of experiments we have just described are not extensive, Baron von Weber considers that the following deductions may be drawn from them: 1st. That the resistance of the spikes to the horizontal displacement of the rails upon the sleepers is proportionately so insignificant that most of the movements of the rolling stock which would be capable of producing a displacement of the rails on the sleepers would suffice to overcome this resistance; and, 2d. That the power of resistance of the spikes to horizontal displacement decreases, after that displacement has once begun, in a more rapid ratio than the displacement itself increases; and hence that the continued action of the rolling stock will produce generally greater displacements than a sudden and great pressure or force.

762. Herr Funk's Experiments on the Resisting Power of Railway Spikes. The experiments made by Herr Funk on the holding power of railway spikes constitute, as we remarked, one of the most important investigations of the kind ever carried out, the experiments being directed, not merely to ascertaining the power of the spikes to resist a force tending to draw them straight out of the timber, but also to determining their resistance to lateral displacement. The effect of modifications in the forms of the spikes, and variations in the nature of the timber into which they were driven were also taken into consideration.

The resisting power of railway spikes depends chiefly—

1. Upon the kind of timber of which the sleeper is formed, and the condition of the latter.
2. Upon the shape and dimensions of the spikes.
3. Upon the mode of driving them into the sleepers.

The following results are derived from the above investigations, and from former experience gained in the construction and maintenance of permanent way-structures:—

1. Sleepers made of oak are preferable to those made of fir and deal, not only on account of their greater durability, but also on account of the greater resisting power which they give to the spikes. Although experience has not yet sufficiently proved the proportionate durability of prepared oak,

fir, and pine sleepers, it is, nevertheless, advisable to use oak sleepers, even in cases where the prices for the oak are $1\frac{1}{2}$ or $1\frac{3}{4}$ times as high as those for the softer kinds of wood.

2. Joint sleepers, where a great resisting power of the spikes is especially necessary, ought to be made of oak, even in those cases where that timber costs about 2 or $2\frac{1}{4}$ times as much as fir or pine. If the difference of the price, however, is still greater, the joint sleepers of fir ought to be made larger, in order to enable a greater resisting power to be obtained for the spikes by giving the latter additional length.

3. If the intermediate sleepers are made of fir, one or two of these sleepers—according to whether 15 or 21 ft. rails are used—ought to have two spikes on the outside of the rail base, or small bedplates, 3 or 4 inches wide, should be adopted, in order to increase the resisting power of the spikes against lateral pressure, and especially to bring the inside spike also into action. The number of these outside spikes or bedplates ought to be increased in curves of small radii on the outer line of rails, or ought to be provided with a bedplate with two holes.

4. The impregnation of the sleepers with chloride of zinc does not influence the resisting power of the spikes, but this power seems to be a little less for newly prepared sleepers which are still completely saturated with water.

5. The bellied spikes possess the smallest resisting power, this power being only 0.7 or 0.9 of that for prismatic spikes of the same weight.

6. No favorable result is obtained by twisting the spikes or by jaggging their edges.

7. The resisting power of double pyramidal spikes of short length is for deal about $\frac{1}{4}$ greater than that of straight prismatic spikes of the same weight; this advantage does not exist, however, in the case of spikes of greater length, nor when the spikes are driven into oak.

8. The simple pyramidal spikes and the prismatic spikes, if both are driven equally deep into the wood, offer the same resisting power against being drawn out of the timber, whilst, if the same volume of both is driven into the wood, the holding power of the former is for oak and for long spikes about $\frac{1}{10}$, and for deal and for shorter spikes about $\frac{1}{4}$ greater than the resisting power of prismatic spikes. But with respect to the resisting power against lateral displacements within the limits important for permanent way-struc-

tures, the prismatic spikes are in a similar proportion stronger than pyramidal spikes.

9. The pyramidal spikes costing about 20 per cent. more than prismatic spikes of the same weight, the advantage of the smaller volume of iron driven into the wood for the necessary depth of 5 or 6 inches (found by experience to be a sufficient depth for the spiking of rails), is completely compensated; the prismatic spikes are, therefore, preferable to pyramidal spikes, as the former, besides their greater resisting power against lateral pressure, have not the great disadvantage of the latter spikes of becoming, when once loosened, soon entirely powerless.

763. Baron von Weber's Experiments on the Resisting Power of Spikes. The experiments above described being of a very satisfactory kind, Baron von Weber's researches were conducted so as to deal with questions to which Herr Funk's experiments did not relate, and they were especially carried out for the purpose of ascertaining the influence of the pressure of the wheels against the rails upon the resisting power of the spikes.

The average results deduced by Baron von Weber, from the experiments we have recorded, are that, in the case of the fir sleepers, a force of about 1,850 lbs., and in the case of oak sleepers, a force of about 3,000 lbs. was required for drawing the spikes. As the latter had 73 square centimetres, or 11.3 square inches, of surface in contact with the timbers, the forces required for drawing the spikes were :

	Pounds per square inch of surface.
In fir sleepers.....	163.2
In oak sleepers.....	269.6

These values for the holding power are much less than those found by von Kaven and Funk, and there is also somewhat less difference between the respective holding powers in fir and oak than was shown by the researches of those experimenters. Baron von Weber, however, considers—and we agree with him—that the difference between von Kaven and Funk's results and his own are fully accounted for by the fact that in the latter experiments the spikes were not merely subjected to a pull in the direction of their axes, but were exposed also to lateral pressure, the pull being exerted on the underside of the nose or head. Baron von Weber considers also that, from the fibres of oak having less flexibility than those of fir, this

lateral pressure would produce greater loosening of the spikes in the former than in the latter timber, and hence there would be less difference in the holding power of the spikes in the two kinds of sleepers, than was shown by the researches of former experimenters, who applied a direct pull to the spikes.

This fact shows, as is remarked by Baron von Weber, that results of direct practical value can only be obtained by experiments carried out under the circumstances which exist in actual practice, and he considers, for this reason, that the values for the holding power of spikes deduced from his researches are more reliable for practical use than those obtained from previous experiments.

764. Experiments on the effects of Bedplates. After the preceding experiments had been carried out, it became desirable, in order to complete the inquiries relating to the influence of the means usually adopted for effecting the connection between the rails and sleepers, that some experiments should be made to ascertain the effect of interposing rolled iron bedplates between the sleepers and rails. Such bedplates are generally supposed to serve three purposes. Thus, first, they render the spikes driven into the sleepers on both sides of the rail dependent on each other, it being impossible for one to be displaced without the other being displaced also; and thus it might be expected *à priori* that the resistance of the spikes to lateral displacement would be doubled. Second, the plates prevent the impression of the edge of the rail into the sleeper, an action which is often the reason for the rail canting; and, third, they practically increase the bearing surface of the base of the rail upon the sleeper.

In this series of trials, two pieces of rails were fastened, at the usual gauge apart, upon three fir sleepers, and between the rails and the central sleepers were placed bedplates of the




Fig. 234. Fig. 235. shape shown in Figs. 234 and '235. The spikes fitted the holes in the plate well, and at the same time pressed firmly against the bases of the rails. The plates were arranged in such a manner that the side of one hole was placed towards the inside of the rails, and the press acted against the heads of the rails directly above the plates.

The effect of the plates in the above experiment was very clear, and they evidently increased the resistance of the spikes to lateral displacement until the latter has been drawn out of the timber. In fact, the pressure required to loosen the

structure was more than double that necessary in the case of the structure without plates.

In this case, the rails were fixed upon two sleepers, bedplates being interposed between the former and the latter, and the press being placed so as to act upon the heads of the rails midway between the two sleepers.

The prevention of the lateral displacement of the rails resulting from the use of plates, was in the above instance the cause of a greater stability of the heads of the rails, but it at the same time had the effect of causing the more rigid structure to become loosened with a less widening of the gauge and a less pressure than was the case with the more elastic structure without plates. But the deferred loosening of the structure without plates was practically of no value, for before the loosening took place the gauge had been widened to such an extent that the line would have been unfit for use.

In these trials the rails were fastened upon four sleepers with bedplates, and the press acted against the heads of the rails in the middle between the central sleepers.

The loosening of the structure with plates took place at a smaller widening of the gauge, but at a much greater pressure than that of the structure without plates; and the resistance of the structure was in fact increased by the use of the bedplates more than 60 per cent.

In this series the rails were fastened down to five sleepers, bedplates being interposed, but two arrangements of the plates were tested. In the first case, all the bedplates were arranged in the same manner as in the previous experiments, that is, with the side traversed by one spike placed inside; but in the second case, the plates on the three central sleepers were turned so that the side having two spikes was next the centre of the line. Thus six extra spikes were made to act against the canting of the rails, whilst the total number of spikes securing the rails to the sleepers remained the same. The second arrangement was tested for the purpose of ascertaining the most advantageous method of placing the plates to secure stability of the structure.

The above experiments showed that the stability of the structure was practically the same for both positions of the plates, up to a pressure of 80 centners (= 9,075 lbs.). The spikes in the normal arrangements then became loose, while the other arrangement with two spikes inside the rails on each of the three central sleepers allowed a further widening of the gauge up to 38 millimetres (= 1.496 in.) before the resisting power of the fastening ceased. The second arrangement of

the plates thus offered a greater resistance to the destruction of the structure than that in which single spikes were placed inside the rails.

765. The general deductions drawn by Baron von Weber from all the experiments relating to question (g), namely, *What force is required to draw the spikes out of the sleepers?* are as follows:—

1. That the force, in pounds, required to draw out of timber rail-spikes of the usual form—that is to say, square prismatic spikes with chisel points—is to be found, if the strain acts directly in the direction of the axis of the spike, by multiplying the area of the surface of the spike in contact with the timber by the following numbers:—

For fir, 300 lbs. }	} per square inch of surface of the driven portion of
“ oak, 600 “ }	
“ fir, 47 “ }	} per square centimetre of surface of the driven portion
“ oak, 94 “ }	

If, however, the force acts laterally as well as in the direction of the axis, as is generally the case in practice, the multipliers become as follows:—

For fir, 150 lbs. }	} per square inch of surface of the driven portion of the
“ oak, 270 “ }	
“ fir, 25 “ }	} per square centimetre of surface of the driven por-
“ oak, 42 “ }	

2. That spikes driven into a sleeper for the second time after the holes in the timber have been filled up, offer at first greater resistance than spikes driven into new sleepers.

3. That but very small forces are required to produce a widening of the gauge to the extent of 6 or 10 millimetres (0.236 in. or 0.394 in.) as such amounts of widening are within the limits of elasticity of the structure, and require no loosening of the fastenings.

4. That a lateral pressure of 80 centners (= 9,075 lbs.) at the most, acting against one point of the head of the rails, is sufficient to produce either a canting or lateral displacement of the rails to such an extent that the structure at this point is completely and permanently loosened.

5. That the force required for the further spreading and final destruction of the structure is much less than that necessary for the first loosening, the former being seldom more than 75 per cent. of the latter.

6. That the resistance of the structure to a pressure acting against one point of the head of a rail does not increase in

direct proportion to the number of sleepers to which the rail is fastened, but that the elasticity of the rail and consequent torsion permits the fastenings upon the several sleepers to be loosened successively. The resistance of the rails to torsional strains may, however, enable the fastenings at any one point to receive such support from the adjoining fastenings that the resistance to canting at that point may be doubled.

7. That if the elasticity of the rails is very great, a widening of the gauge to the extent of 25 millimetres (=0.984 in.) may be produced without remaining permanent or without showing signs of having occurred after the pressure has been removed. This is more likely to happen if the widening of the gauge is produced by the canting of the rails than if it is due to their lateral displacement on the sleepers; in the latter case the displacement of the fastenings would be visible, whilst in the former a slight raising of the spikes in the direction of their axis would only be observed under very favorable circumstances.

8. That in the case of structures having the joints of the two lines of rails arranged opposite each other on the same sleeper, the points on which the joints occur offer considerably less resistance to a widening of the gauge than is the case when the rails are disposed so as to break joint, the proportionate resisting powers in the two cases being about as 7 to 10. Thus a permanent way, having the joints of the two lines of rails opposite each other, has as many points as there are joints, at which the lateral stability or power to resist widening of the gauge, is but $\frac{7}{10}$ of that at the joints of the structure having the rails disposed so as to break joint. This is of importance with respect to accidents originating from the widening of the gauge.

9. That the application of bedplates between the rails and sleepers increases—under otherwise equal circumstances—the power of resistance of the structure to lateral displacement of the rails; but that the loosening of the fastenings takes place with a smaller displacing movement.

We now come to the experiments relating to question (h), namely: “What force is required to overcome the total resistance due to the combination of the holding power of the spikes in the sleepers and the friction between the rails and wheels?”

The trials just recorded are, as Baron von Weber justly observes, very instructive, for they prove that the friction between the rails and the sleepers, *plus* the resistance of the outside spikes, is sufficient to keep the rails in their places, even

when the pressure against the heads is such as to cause the canting of the rails to an extent sufficient to render the line unfit for traffic. The experiments also show that the inside spikes afford proportionately little resistance, and that they represent the weakest points of the structure. In fact, the fastened and loaded rails showed, under the influence of the same displacing power, displacements which were certainly not less than those obtained in the case of the structure in which the inside spikes had been loosened.

Nothing now remained connected with this part of Baron von Weber's investigations but to collect facts showing the influence of the state of the surface of the rails upon the stability of the structure.

766. The deductions made by him from the experiments relating to the question (*h*), "*What force is required to overcome the total resistance due to the combination of the holding power of the spikes in the sleepers and the friction between the rails and wheels?*" are as follows:—

1. That the resisting power of the rails to lateral forces is considerably increased through the friction between the wheels and rails, this friction causing the axle to form a kind of tie between the two rails.

2. That if the load upon the rail is more than 9,075 lbs. per wheel or vehicle, the resisting power of the rails to canting due to the friction just mentioned is greater than that due to the spiking of the rails in the ordinary way to fir sleepers.

3. That the resistance of the rails to lateral displacement on the sleepers is increased by the load on the rails in the proportion of 0.33 of that load; whence, in the case of rails carrying the load of 6,806 lbs. per wheel, the resistance of the rails to lateral displacement on the sleepers due to the load, is greater than that due to the resisting power of the spikes.

4. That if the load be more than 9,075 lbs. per wheel, the frictional resistances cause the rails to be supported at top and bottom against both canting and lateral displacement, and the support thus afforded is more effective than that due to the ordinary spiking.

5. That the forces tending to produce canting and lateral displacement due to the horizontal oscillations of the rolling stock, can only be resisted (at least in most cases) by the combined action of the spikes, the friction between the wheels and rails, and the friction between the rails and sleepers.

6. That if, therefore, the load upon one point of the structure be partially or entirely removed by the undue vertical

oscillation of a vehicle, whilst, at the same time, a lateral oscillation of the vehicle takes place, the stability of the structure against the pressure due to this lateral oscillation depends solely upon the insufficient resisting power of the spikes, and the lateral distortion and displacement are the unavoidable consequences. This last deduction is, as Baron von Weber justly considers, one of very great importance, and, in fact, the experimental researches upon which it is founded may be said to prove the cause which leads to the serpentine displacements of the rails but too frequently met with on straight portions of a line of railway, particularly if the line is one of light construction, or is traversed by locomotives having considerable overhang at the leading and trailing ends. If such a portion of a line contains a sleeper badly bedded, which sinks uniformly throughout its entire length under the influence of a passing load, the vehicle passing over it will make but a heavy vertical oscillation, having no influence upon the lateral resisting power of the structure. But if the sleeper sinks under one rail more deeply than under the other, the oscillation of the vehicle will be at once horizontal and vertical, and the load will be removed more or less, first from the trailing and then from the leading axle, thus causing the lateral pressure due to the horizontal oscillations to be exerted through the tires of the wheels with full power against the rails.

In such a case it is almost unavoidable that the point of the unloaded, or partially unloaded, structure should be displaced laterally; but this displacement having once occurred, the oscillations of the passing vehicles become so considerable, both in a horizontal and vertical direction, that the displacement of the rail is soon repeated, and only favorable circumstances, such as coincidence of the oscillations, can then produce a uniform motion of the vehicles. The displacements just referred to are considered by Baron von Weber to be most dangerous, both for the stability of the structure, and the passage of the trains, because their original causes can only be discovered with great difficulty, even when the permanent way is most carefully maintained.

767. Notwithstanding the great value of the results obtained from the experiments we have already described, it is undeniable that some of the main questions relating to the stability of permanent way-structures can only be finally answered by ascertaining the amount of the momentary deflections and displacements of the rails which actually occur when a line is subjected to the action of passing trains, but which

disappear either entirely, or almost entirely, after the action which causes them ceases, and which are thus, under ordinary circumstances, likely to escape observation.

The momentary deflections and displacements just referred to may be divided into two classes, namely, those which apparently disappear on the removal of the load, and those which disappear absolutely. To the first class belong those deflections and displacements which, although causing a greater or less loosening of the structure, are yet within the limits of elasticity of the rails, so that the latter, after the passage of the train, return to their normal positions, and there are only left to make the movements which have taken place, the small lateral displacements of the spikes, or small impressions of the sleepers by the bases of the rails. Such marks of displacements are likely to escape any but very careful inspection; yet, taken altogether, they may allow to the rails an amount of play or liberty to cant which may produce dangerous results. The second class of momentary displacements, on the other hand, consists of those which take place within the limits of elasticity of the permanent way-structure as a whole, all the parts returning to their normal positions on the removal of the cause of the disturbance. Such momentary alterations as these in the positions of the rails occur less frequently than those of the former class, but they may nevertheless become dangerous under certain circumstances which will be spoken of hereafter.

We now come to the deductions drawn by Baron von Weber, from the results of the various series of experiments recorded by us in the preceding articles of the present series. It is the opinion of the Baron that the tendency of advanced railway practice is to abandon the ordinary system of iron or steel rails fixed on wooden sleepers for the use of permanent way-structures formed of iron alone, and he considers that ultimately lines of rails will be constructed as continuous girders, strong enough to resist all the actions of the rolling stock, and resisting directly upon properly prepared ground, without the intervention of intermediate members or perishable materials. "Looking back," he says, "upon the experimental researches, we are struck by an extraordinary fact, the remarkable character of which is enhanced by the circumstance that it has been little known and still less taken into consideration. This fact is that heavy trains and powerful engines have already ran longer than the age of the present generation upon lines or structures, the flexibility of which is so great that every wheel leaves its impression, and every os-

cillation produces a displacement; and of which the stability—as far as it depends upon the resisting power of its mechanical parts—is so small in proportion to the disturbing influences brought to bear upon it, that almost any one of these influences would destroy the structure if it were not that the very load itself increased the stability through the agency of the friction between the wheels and the rails. It would be quite unworthy of engineers and engineering science to reply that as the traffic has for a long period been satisfactorily carried on lines possessing such flexibility, that, therefore, it is of no importance whence the stability comes, so long as it is there when required. We might as well state that the neighborhood of a certain powder-mill is free from danger, because explosions have occurred but rarely during the last five-and-thirty years.”

763. Deductions of Baron von Weber from tabulated results. Baron von Weber makes a series of deductions which are worthy of the careful attention of both locomotive superintendents and engineers in charge of permanent way. These deductions are in substance as follows:—

1. That, as is well known, six-wheeled locomotives, when running, oscillate round their central axle, a dipping or plunging motion taking place towards the leading and trailing end alternately. Thus the loads upon the leading and trailing springs vary according to the oscillations, and consequently the pressures exerted by the leading and trailing wheels upon the rails vary also.

2. That in the case of engines on which the experiments were made the greatest load imposed in this manner upon the springs exceeded the normal load by 103 per cent. (the increase of load being from 70 to 160 centners per wheel) in the case of the leading springs, and by 74 per cent. (the increase being from 115 to 200 centners per wheel) in the case of the trailing springs.

3. That the maximum loads just mentioned are much greater than that laid down by the rules acknowledged by German railways, namely, a maximum of 130 centners per wheel. Thus in determining the strength of permanent way-structures this great increase of the pressure sometimes exercised upon the rails should be taken into consideration.


4. That the load upon the springs is sometimes reduced during the running of the engine to about 7 per cent. of the normal load (the reduction being from 72 to 5 centners) in the case of the leading springs, and to 26 per cent. of the normal load (from 114 to 30 centners) in the case of the

trailing springs. The decrease, or even sometimes the almost entire removal of the load from the leading springs is surprising. The experiments, of which an account has just been given, prove that the permanent way is momentarily subjected to far greater loads than it is ordinarily supposed to carry, and further that it is sometimes almost entirely relieved of its load as above stated. It appears also certain that there exist horizontal oscillations of the vehicles produced at first by partially vertical oscillations, and there thus exists the greatest probability of the coincidence of such a relief from load as has just been mentioned, with a horizontal oscillation towards the rail from which the load has just been removed, the result being a displacement of the permanent way, as, under the circumstances supposed, the opposition offered by the latter is but that due to its mechanical structure. The experiments on the stability of permanent way already described, together with the investigations of the variations of load on the wheels of the engines, explain in a satisfactory manner the causes of many cases of widening of the gauge and displacement of the structure previously considered inexplicable.

5. The difference between the maximum and minimum loads resting at different times on the same spring varies by more than double the normal load in the case of the leading wheels; but seldom by more than 40 per cent. of that load in the case of the trailing wheels, a circumstance which indicates that the real centre of oscillation of the masses forming the engine is situated between the driving and trailing axle, and not over the former.

6. That the extreme amounts of variation in the loads on the leading and trailing springs were found to occur in an engine the construction of which would have least justified the expectation of their taking place. This engine was the "Prometheus," in which the wheel base differed very little from the length of the boiler, and in which about 60 per cent. of the load was removed from the leading wheel, while that on the trailing wheels was reduced to 77 per cent. of the normal load. This fact points strongly to the danger often attendant upon placing a great load upon the driving axle, if the latter is situated under the centre of the engine.

769. Sleepers. The preservation of sleepers by chemical processes is always the subject of experiment on one or another of our railways. The practice, however, is not general in this country, because the mashing of the rail into the sleeper usually destroys it in advance of decay. In England, the

bearings of the chains used with the double-headed rail on every sleeper are so extended, that the mechanical injury of the wood is quite small. Prevention against decay—usually immersion in coal-tar—is therefore generally practised. The insufficient bearing offered by sleepers to the rails is thus, directly and indirectly, the cause of their rapid destruction. It is stated that placing the sleepers closer than, say two feet apart between centres, would prevent the convenient tamping of the ballast. It is objected to the longitudinal sleeper, that the rail lying parallel with the fibre of the wood, mashes into it more easily than into the cross-sleeper. These objections to insufficient bearing are not inherent in either system, but arise from improper construction. Thoroughly good ballast would not require continual tamping. It is even proposed by some of our most experienced engineers to cover the ballast with a coating of coal-tar and gravel, to absolutely exclude water, and thus prevent not only decay, but washing, freezing, heaving, settling—all destroying elements but vibration and wear. In this case the timber bearings under the rails should be almost continuous, to prevent wear both on the ballast and on the rail. The mashing of rails into timbers, either longitudinals or cross-sleepers, is largely due to the want of stiffness in the rails themselves. The low  rails on the Great Western of England are the most notable examples of this kind of failure. If the iron wasted in the thick stem and pear-head of our worst shaped rails were put into the height of stem, their resistance to deflection would be doubled, this resistance being as the cube of the depth.

There is a growing conviction among engineers, that the longitudinal system will become standard. It offers twice to three times as much bearing for the rail as the cross-sleeper system. The whole strength of a longitudinal is added to the strength of the rail, considered as a beam to carry the load. The strength of the cross-sleeper in this direction is wholly wasted. The longitudinal is almost certain to prevent the displacement of a broken rail. This system has never been tried on a large scale, with a high, stiff rail. It requires better ballast, and more thorough adjustment than the other system. Independent points of support, like the isolated ends of cross-sleepers, that can be blocked up or let down at pleasure, without reference to the rest of the superstructure, are the indispensable accompaniment of bad ballasting and imperfect drainage. But they are unsuited to any system of homogeneous, continuous, and permanent way.

Iron sleepers are coming into use in countries where tim-

ber is very costly and unsuitable, and are the subjects of various experiments in England.

The great defect of all imperishable sleepers, whether stone or iron, has been want of elasticity. An anvil under a rail, and especially under a joint, is as bad if not worse than an insufficient support.

770. Rail-Joints. The selection of joint fastenings for the ends of rails is somewhat dependent upon the weight of rail required, and hence upon the traffic. After twenty years of competitive trial with every variety of fastening, the simple "fish-joint"—an iron splice on each side of the rail—has become standard in Europe, and is gaining ground here. It is the lightest and strongest fastening that can be applied, when rails are high, and properly shaped to receive it. The old difficulty of nuts jarring loose has been overcome by the use of elastic washers. Fishing a pear-headed rail, three or three and a half inches high, would be perfectly useless. For light rails, and for steel rails (to save weakening them by punching), and as an auxiliary to the fish-joint, the new Reeves' fastening—a light clamp upon the contiguous flanges of two rails—is coming largely into use. The mere chair or seating for the ends of rails is no longer considered safe nor economical for lines of heavy traffic. Although there is room for farther experiment, it cannot be said that the demand for a good rail-joint has not been met.

771. Steel Rails—The Results. Bessemer steel rails have been in regular and extensive use abroad over ten years. For several years large trial-lots have been laid on various American roads having heavy traffic.

772. The Wear of Steel Rails. As no steel rails are reported to have worn out on our roads, the comparative durability of steel and iron cannot be absolutely determined.

A great number of instances of the comparative wear of steel were cited. In one case twenty-three iron rails had been worn out, where a steel rail, laid end to end with the iron, was not yet worn down. In other cases the wear was seventeen to one. It is conceded that any steel rail will outlast six iron rails. In fact, the remarkable wearing qualities of steel rails have never been doubted or questioned.

773. Breakage of Steel Rails. Some steel rails of English, French, and American manufacture have broken in service. In several cases the cause has been ascertained by the direct analysis of the broken rail. The cause was phosphorus. In some other cases, where analyses were not made, the *general* character of the iron used has been ascer-

tained, and the trouble has been *inferred* to be phosphorus, or, in some cases, an excess of silicon. It is well known to steel makers that a very minute proportion of phosphorus (above 0.2 per cent.) will make Bessemer steel brittle. In other cases rails have broken at the mark of the "gag," or instrument for straightening the rail cold. The rails had not been properly hot-straightened, or were finished at too low a heat. More rails have broken through punched fish-bolt holes, and at punched nicks in the flange, than at any other places. Experiments prove that punching a hole in a steel rail which is sufficiently hard to wear well, weakens it.

In the absence of further official information, it is fair to assume that the breakage of steel rails is only a small percentage of the breakage of iron rails. Indeed, the latter is of daily occurrence, and is rarely considered by the public, except when lives are lost, and not always by railway managers when they make contracts.

774. Tests and Improvements. The punching of steel rails has been abandoned. Several kinds of power and hand drilling machines have been introduced, that do the work rapidly and well. The loss from the neutral axis of a rail, of the little material necessary to let a bolt through, cannot sensibly weaken it. To prevent the rails from creeping, the engineer of the Pennsylvania railway pins them to several sleepers by means of $\frac{1}{4}$ inch holes drilled in the flange. There are also other and better devices for preventing end movement, which do not weaken the rail at all. The grand advantage of steel, for service under concussion and wear, is its homogeneity. Having been cast from a liquid state, it is sound and uniform, and free from the laminations and layers of cinder and numerous welds which characterize wrought iron, especially the low grades of wrought iron usually put into rails.

775. Improved Traction upon Steel Rails. It has been too much the practice of railway managers to consider only the increased durability of steel. A less striking, but perhaps equally important advantage is, that it has double the strength and more than double the stiffness of iron.

The great and constant resistance to traction, and the wear and tear of track, wheels, and running gear, due to the deflection of rails between the sleepers and the perpetual series of resulting concussions, may be much reduced, or practically avoided, by the use of rails of twice the ordinary stiffness; in such a case, however, reasonably good ballasting and sleepers would be essential. When a whole series of sleep-

ers sinks bodily into the mud, the consideration of deflection between the sleepers is a premature refinement. If the weight of steel rails is decreased in proportion to their strength, these advantages of cheaper traction and maintenance will not, of course, be realized. The best practice, here and abroad, is to use the same weight for steel as had been formerly employed for iron.

776. Steel-headed Rails. Many attempts have been made in England, on the Continent, and in this country, to produce a good steel-headed rail, and not without success. Puddled steel heads have all the structural defects of wrought iron, as they are not formed from a cast, and hence homogeneous mass, but are made by the wrought-iron process, and are, in fact, a "high" steely wrought iron. They are, however, a great improvement upon ordinary iron, although probably little cheaper than cast-steel heads. Rolling a plain cast-steel slab upon an iron pile has not proved successful. The weld cannot be perfected on so large a scale, and the steel peels off under the action of car wheels. Forming the steel slab with grooves, into which the iron would dovetail when the pile was rolled into a rail, has been quite successful.

CHAPTER VIII.

CANALS.

777. *Canals* are artificial channels for water, applied to the purpose of inland navigation; for the supply of cities with water; for draining; for irrigation, &c., &c.

778. *Navigable* canals are divided into two classes: 1st. Canals which are on the same level throughout their entire length, as those which are found in low level countries. 2d. Canals which connect two points of different levels, which lie either in the same valley, or on opposite sides of a dividing ridge. This class is found in broken countries, in which it is necessary to divide the entire length of the canal into several level portions, the communication between which is effected by some artificial means. When the points to be connected lie on opposite sides of a dividing ridge, the highest reach, which crosses the ridge, is termed the *summit level*.

779. 1st CLASS. The surveying and laying out a canal in a level country, are operations of such extreme simplicity as to require no particular notice in this place.

The cross section of this class (Fig. 236) presents usually a




Fig. 236—Cross section of a canal in level cutting.

- A, water-way.
- B, tow-paths.
- C, berms.
- D, side-drains.
- E, puddling of clay or sand.

water-way, or channel of a trapezoidal form, with an embankment on each side, raised above the general level of the country, and formed of the excavation for the water-way. The level, or surface of the water, is usually above the natural surface, sufficient thickness being given to the embankments to prevent the filtration of the water through them, and to resist its pressure. This arrangement has in its favor the advantage of economy in the labor of excavating and embanking,

since the cross section of the cutting may be so calculated as to furnish the necessary earth for the embankment; but it exposes the surrounding country to injury, from accidents happening to the embankments.

The relative dimensions of the parts of the cross section may be generally stated as follows; subject to such modifications as each particular case may seem to demand.

The width of the water-way, at bottom, should be at least twice the width of the boats used in navigating the canal; so that two boats, in passing each other, may, by sheering towards the sides, avoid being brought into contact.

The depth of the water-way should be at least eighteen inches greater than the draft of the boat, to facilitate the motion of the boat, particularly if there are water-plants growing on the bottom.

The side slopes of the water-way, in compact soils, should receive a base at least once-and-a-half the altitude, and proportionally more as the soil is less compact.

The thickness of the embankments, at top, is seldom regulated by the pressure of the water against them, as this, in most cases, is inconsiderable, but to prevent filtration, which, were it to take place, would soon cause their destruction. A thickness from four to six feet, at top, with the additional thickness given by the side slopes at the water surface, will, in most cases, be amply sufficient to prevent filtrations. A pathway for the horses attached to the boats, termed a *tow-path*, which is made on one of the embankments, and a foot-path on the other, which should be wide enough to serve as an occasional tow-path, give a superabundance of strength to the embankments.

The tow-path should be from ten to twelve feet wide, to allow the horses to pass each other with ease; and the foot-path at least six feet wide. The height of the surfaces of these paths, above the water surface, should not be less than two feet, to avoid the wash of the ripple; nor greater than four feet and a half, for the facility of the draft of the horses in towing. The surface of the tow-path should incline slightly outward, both to convey off the surface water in wet weather, and to give a firmer footing to the horses, which naturally draw from the canal.

The side slopes of the embankment vary with the character of the soil: towards the water-way they should seldom be less than two base to one perpendicular; from it, they may, if it be thought necessary, be less. The interior slope is usually not carried up unbroken from the bottom to the top; but a hori-

zontal space, termed a *bench*, or *berm*, about one or two feet wide, is left, about one foot above the water surface, between the side slope of the water-way and the foot of the embankment above the berm. This space serves to protect the upper part of the interior side slope, and is, in some cases, planted with such shrubbery as grows most luxuriantly in aquatic localities, to protect more efficaciously the banks by the support which its roots give to the soil. The side slopes are better protected by a revêtement of dry stone. Aquatic plants of the bulrush kind have been used, with success, for the same purpose; being planted on the bottom, at the foot of the side slope, they serve to break the ripple, and preserve the slopes from its effects.

The earth of which the embankments are formed should be of a good binding character, and perfectly free from vegetable mould, and all vegetable matter, as the roots of plants, &c. In forming the embankments, the vegetable mould should be carefully removed from the surface on which they are to rest; and they should be carried up in uniform layers, from nine to twelve inches thick, and be well rammed. If the character of the earth, of which the embankments are formed, is such as not to present entire security against filtration, a puddling of clay, or fine sand, two or three feet thick, may be laid in the interior of the mass, penetrating a foot below the natural surface. Sand is useful in preventing filtration caused by the holes made in the embankments near the water surface by insects, moles, rats, &c.

Side drains must be made, on each side, a foot or two from the embankments, to prevent the surface water of the natural surface from injuring the embankments.

780. 2d CLASS. This class will admit of two subdivisions: 1st. Canals which lie throughout in the same valley; 2d. Canals with a summit level.

Location. In laying out canals, belonging to the first subdivision, the engineer must be guided in his choice by the relative expense of construction on the two sides of the valley; which will depend on the quantity of cutting and filling, the masonry for the culverts, &c., and the nature of the soil as adapted to holding water. All other things being equal, the side on which the fewest secondary water-courses are found will, generally speaking, offer the greatest advantage as to expense, but it may happen that the secondary water-courses will be required to feed the canal with water, in which case it will be necessary to lay out the line on the side where they are found most convenient, and in most abundance.

781. Cross section. The side formations of excavations and embankments require peculiar care, particularly the latter, as any crevices, when they are first formed, or which may take place by settling, might prove destructive to the work. In most cases, a stratum of good binding earth, lining the water-way throughout to the thickness of about four feet, if compactly rammed, will be found to offer sufficient security, if the substructure is of a firm character, and not liable to settle. Fine sand has been applied with success to stop the leakage in canals. The sand for this purpose is sprinkled, in small quantities at a time, over the surface of the water, and gradually fills up the outlets in the bottom and sides of the canal. But neither this nor puddling has been found to answer in all cases, particularly where the substructure is formed of fragments of rocks offering large crevices to filtrations, or is of a marly nature. In such cases it has been found necessary to line the water-way throughout with stone, laid in hydraulic mortar. A lining of this character (Fig. 237), both

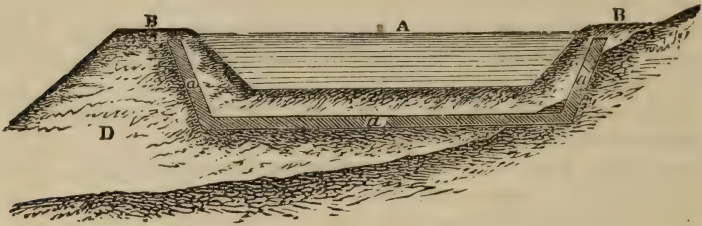


Fig. 237—Cross section of a canal in side cutting lined with masonry.
 A, water-way.
 B, tow-paths.
 D, embankment.
 a, masonry lining.

at the bottom and sides, formed of flat stones, about four inches thick, laid on a bed of hydraulic mortar, one inch thick, and covered by a similar coat of mortar, making the entire thickness of the lining six inches, has been found to answer all the required purposes. This lining should be covered, both at bottom and on the sides, by a layer of good earth, at least three feet thick, to protect it from the shock of the boats striking either of those parts.

The cross section of the canal and its tow-paths in deep cutting (Fig. 238) should be regulated in the same way as in canals of the first class; but when the cuttings are of considerable depth, it has been recommended to reduce both to the dimensions strictly necessary for the passage of a single boat.

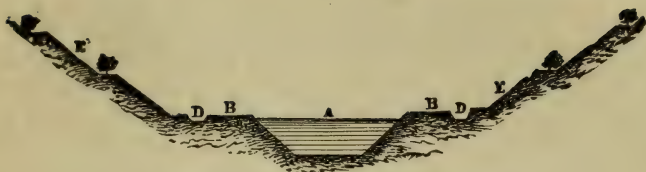


Fig. 233—Cross section of a canal in deep cutting.
E, side slopes of cutting.

By this reduction there would be some economy in the excavations; but this advantage would, generally, be of too trifling a character to be placed as an offset to the inconveniences resulting to the navigation, particularly where an active trade was to be carried on.

782. Summit level. As the water for the supply of the summit level of a canal must be collected from the ground that lies above it, the position selected for the summit level should be at the lowest point practicable of the dividing ridge, between the two branches of the canal. In selecting this point, and the direction of the two branches of the canal, the engineer will be guided by the considerations with regard to the natural features of the surface, which have already been dwelt upon.

783. Supply of water. The quantity of water required for canals with a summit level, may be divided into two portions. 1st. That which is required for the summit level, and those levels which draw from it their supply. 2d. That which is wanted for the levels below those, and which is furnished from other sources.

The supply of the first portion, which must be collected at the summit level, may be divided into several elements: 1st. The quantity required to fill the summit level, and the levels which draw their supply from it. 2d. the quantity required to supply losses, arising from accidents; as breaches in the banks, and the emptying of the levels for repairs. 3d. The supplies for losses from surface evaporation, from leakage through the soil, and through the lock gates. 4th. The quantity required for the service of the navigation, arising from the passage of the boats from one level to another. Owing to the want of sufficient data, founded on accurate observations, no precise amount can be assigned to these various elements which will serve the engineer as data for rigorous calculation.

The quantity required, in the first place, to fill the summit level and its dependent levels, will depend on their size, an

element which can be readily calculated; and upon the quantity which would soak into the soil, which is an element of a very indeterminate character, depending on the nature of the soil in the different levels.

The supplies for accidental losses are of a still less determinate character.

To calculate the supply for losses from surface evaporation, correct observations must be made on the yearly amount of evaporation, and the quantity of rain that falls on the surface; as the loss to be supplied will be the difference between these two quantities.

With regard to the leakage through the soil, it will depend on the greater or less capacity which the soil has for holding water. This element varies not only with the nature of the soil, but also with the shorter or longer time that the canal may have been in use; it having been found to decrease with time, and to be, comparatively, but trifling in old canals. In ordinary soils it may be estimated at about two inches in depth every twenty-four hours, for some time after the canal is first opened. The leakage through the gates will depend on the workmanship of these parts. From experiments by Mr. Fisk, on the *Chesapeake and Ohio* canal, the leakage through the locks at the summit level, which are 100 feet long, 15 feet wide, and have a lift of 8 feet, amounts to twelve locks full daily, or about 62 cubic feet per minute. The monthly loss upon the same canal, from evaporation and filtration, is about twice the quantity of water contained in it. From experiments made by Mr. J. B. Jervis, on the *Erie* canal, the total loss, from evaporation, filtration, and leakage through the gates, is about 100 cubic feet per minute, for each mile.

In estimating the quantity of water expended for the service of the navigation, in passing the boats from one level to another, two distinct cases require examination: 1st. Where there is but one lock between two levels, or in other words, when the locks are isolated. 2d. When there are several contiguous locks, or as it is termed, a *flight* of locks between two levels.

784. A *lock* is a small basin just large enough to receive a boat, in which the water is usually confined on the sides by two upright walls of masonry, and at the ends by two gates, which open and shut, both for the purpose of allowing the boat to pass, and to cut off the water of the upper level from the lower, as well as from the lock while the boat is in it. To pass a boat from one level to the other—from the lower to the

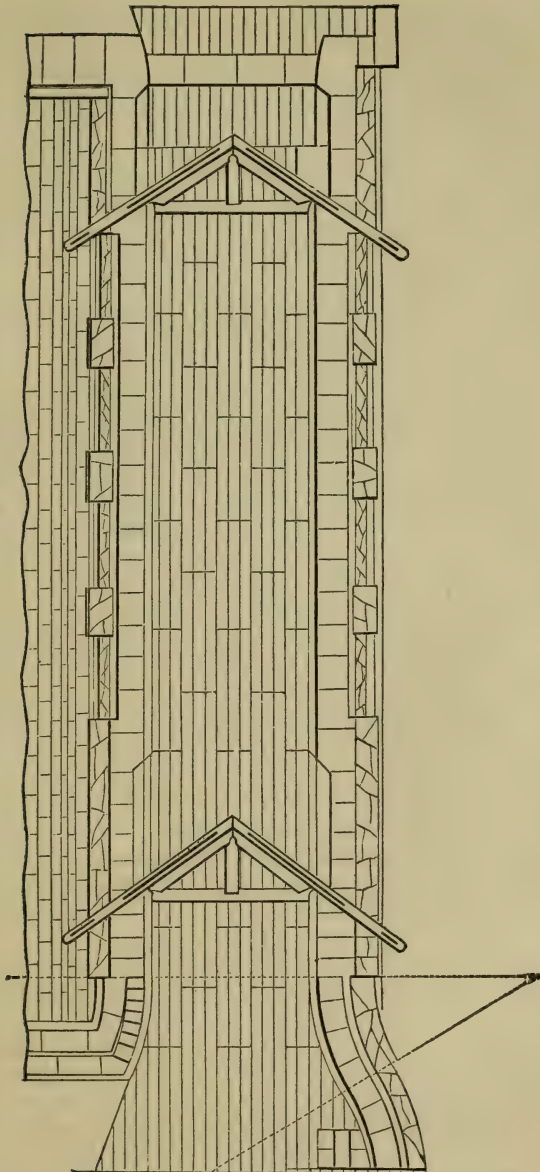


Fig. 239—Is a plan of the present enlarged form of one-half of a double lock on the Erie Canal.

upper end, for example—the lower gates are opened, and the boat having entered the lock they are shut, and water is drawn from the upper level, by means of valves, to fill the lock and raise the boat; when this operation is finished, the upper gates are opened, and the boat is passed out. To descend from the upper level, the lock is first filled; the upper gates are then opened, and the boat passed in; these gates are next shut, and the water is drawn from the lock by valves, until the boat is lowered to the lower level, when the lower gates are opened and the boat is passed out.

In the two operations just described, it is evident, that for the passage of a boat, up or down, a quantity of water must be drawn from the upper level to fill the lock to a height which is equal to the difference of level between the surface of the water in the two; this height is termed the *lift* of the lock, and the volume of water required to pass a boat up or down is termed the *prism of lift*. The calculation, therefore, for the quantity of water requisite for the service of the navigation, will be simply that of the number of prisms of lift which each boat will draw from the summit level in passing up or down.

785. In calculating the expenditure for locks in flights, a new element, termed the *prism of draught*, must be taken into account. This prism is the quantity of water required to float the boat in the lock when the prism of lift is drawn off; and is evidently equal in depth to the water in the canal, unless it should be deemed advisable to make it just sufficient for the draught of the boat, by which a small saving of water might be effected.

786. Locks in flights may be considered under two points of view, with regard to the expenditure of water: the first, where both the prism of lift, and that of draught, are drawn off for the passage of a boat; or second, where the prisms of draught are always retained in the locks. The expenditure, of course, will be different for the two cases.

Great refinements in the calculation of such cases should not be made, but the engineer should confine himself to making an ample allowance for the most unfavorable cases, both as regards the order of passage and the number of boats.

787. Feeders and Reservoirs. Having ascertained, from the preceding considerations, the probable supply which should be collected at the summit level, the engineer will next direct his attention to the sources from which it may be procured. Theoretically considered, all the water that drains from the ground adjacent to the summit level, and above it,

might be collected for its supply ; but it is found in practice that channels for the conveyance of water must have certain slopes, and that these slopes, moreover, will regulate the supply furnished in a certain time, all other things being equal. In making, however, the survey of the country, from which the water is to be supplied to the summit level, all the ground above it should be examined, leaving the determination of the slopes for after considerations. The survey for this object consists in making an accurate delineation of all the water-courses above the summit level, and in ascertaining the quantity of water which can be furnished by each in a given time. This survey, as well as the measurement of the quantity of water furnished by each stream, which is termed the *gauging*, should be made in the driest season of the year, in order to ascertain the minimum supply.

788. The usual method of collecting the water of the sources, and conveying it to the summit level, is by feeders and reservoirs. The *feeder* is a canal of a small cross section, which is traced on the surface of the ground with a suitable slope, to convey the water either into the reservoir, or direct to the summit level. The dimensions of the cross section, and the longitudinal slope of the feeder, should bear certain relations to each other, in order that it shall deliver a certain supply in a given time. The smaller the slope given to the feeder, the lower will be the points at which it will intersect the sources of supply, and therefore the greater will be the quantity of water which it will receive. This slope, however, has a practical limit, which is laid down at four inches in 1,000 yards, or nine thousand base to one altitude ; and the greatest slope should not exceed that which would give the current a greater mean velocity than thirteen inches per second, in order that the bed of the feeder may not be injured. Feeders are furnished like ordinary canals, with contrivances to let off a part, or the whole, of the water in them, in cases of heavy rains, or for making repairs.

But a small proportion of the water collected by the feeders is delivered at the reservoir ; the loss from various causes being much greater in them than in canals. From observations made on some of the feeders of canals in France, which have been in use for a long period, it appears that the feeder of the *Briare* canal delivers only about one-fourth of the water it gathers from its sources of supply ; and that the annual loss of the two feeders of the *Languedoc* canal amounts to 100 times the quantity of water which they can contain.

789. A *Reservoir* is a large pond, or body of water, held in

reserve for the necessary supply of the summit level. A reservoir is usually formed by choosing a suitable site in a deep and narrow valley, which lies above the summit level, and erecting a dam of earth, or of masonry, across the outlet of the valley, or at some more suitable point, to confine the water to be collected. The object to be attained, in this case, is to embody the greatest volume of water, and at the same time present the smallest evaporating surface, at the smallest cost for the construction of the dam.

It is generally deemed best to have two reservoirs for the supply, one to contain the greater quantity of water, and the other, which is termed the *distributing* reservoir, to regulate the supply to the summit level. If, however, the summit level is very capacious, it may be used as the distributing reservoir.

The proportion between the quantity of water that falls upon a given surface, and that which can be collected from it for the supply of a reservoir, varies considerably with the latitude, the season of the year, and the natural features of the locality. The drainage is greatest in high latitudes, and in the winter and spring seasons; with respect to the natural features, a wooded surface with narrow and deep valleys will yield a larger amount than an open flat country.

But few observations have been made on this point by engineers. From some by Mr. J. B. Jervis, in reference to the reservoirs for the *Chenango* canal, in the State of New York, it appears that in that locality about two-fifths of the quantity of rain may be collected for the supply of a reservoir. The proportion usually adopted by engineers is one-third.

The loss of water from the reservoir by evaporation, filtration, and other causes, will depend upon the nature of the soil, and the exposure of the water surface. From observations made upon some of the old reservoirs in England and France, it appears that the daily loss averages about half an inch in depth.

790. The dams of reservoirs have been variously constructed: in some cases they have been made entirely of earth (Fig. 240); in others, entirely of masonry; and in others, of earth packed in between several parallel stone walls. It is now thought best to use either earth or masonry alone, according to the circumstances of the case; the comparative expense of the two methods being carefully considered.

Earthen dams should be made with extreme care, of the best binding earth, well freed from everything that might

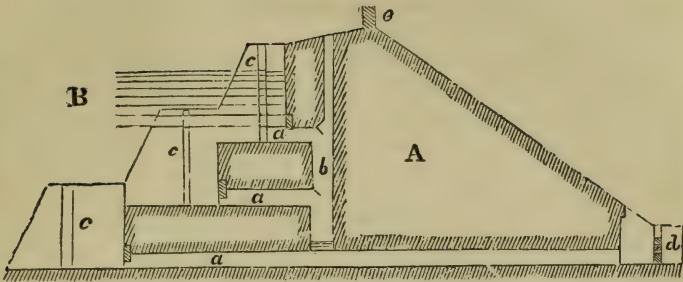


Fig. 240—Represents the section of a dam with three discharging culverts.

A, body of the dam.

B, pond.

a, a, a, culverts, with valves at their inlets, which discharge into the vertical well b.

c, c, c, grooves, in the faces of the side-walls, which form the entrance to the culverts, for stop-plank.

d, stop-plank dam across the outlet of the bottom culvert, to dam back the water into the vertical well.

e, parapet wall on top of the dam.

cause filtrations. A wide trench should be excavated to the firm soil, to receive the base of the dam; and the earth should be carefully spread and rammed in layers not over a foot thick. As a farther precaution, it has in some instances been thought necessary to place a stratum of the best clay puddling in the centre of the dam, reaching from the top to three or four feet below the base. The dam may be from fifteen to twenty feet thick at top. The slope of the dam towards the pond should be from three to six base to one perpendicular; the reverse slope need only be somewhat greater than the natural slope of the earth.

The slope of dams exposed to the water is usually faced with dry stone, to protect the dam from the action of the surface ripple. This kind of facing has not been found to withstand well the action of the water when agitated by high winds. Upon some of the more recent earthen dams erected in France, a facing of stone laid in hydraulic mortar has been substituted for the one of dry stone. The plan adopted for this facing (Fig. 241) consists in placing a series of low walls,

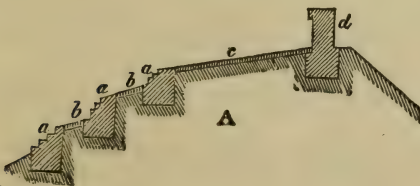


Fig. 241—Represents the method of facing the pond slope of a dam, with low walls placed in offsets.

A, body of the dam.

a, a, a, low walls the faces of which are built in offsets.

b, b, top surface of the offsets between the walls, covered with stone slabs laid in mortar.

c, top of dam faced like the offsets b.

d, parapet wall.

in offsets above each other, along the slope of the dam, covering the exposed surface of each offset, between the top of one wall and the foot of the next, with a coating of slab-stone laid in mortar. The walls are from five to six feet high. They are carried up in small offsets upon the face, and are made either vertical, or leaning, on the back. The width of the offsets of the dam, between the top of one wall and the foot of the next, is from two to three feet.

An arched culvert, or a large cast-iron pipe, placed at some suitable point of the base of the dam, which can be closed or opened by a valve, will serve for drawing off the requisite supply of water, and for draining the reservoir in case of repairs.

The culvert should be strongly constructed, and the earth around it be well puddled and rammed, to prevent filtrations. Its size should be sufficient for a man to enter it with ease. The valves may be placed either at the entrance of the culvert, or at some intermediate point between the two ends. Great care should be taken in their arrangement, to secure them from accidents.

When the depth of water in a reservoir is considerable, several culverts should be constructed (Fig. 240), to draw off the water at different levels, as the pressure upon the lower valves in this case would be very great when the reservoir is full. They may be placed at intervals of about twelve feet above each other, and be arranged to discharge their water in a common vertical shaft. In this case it will be well to place a dam of timber at the outlet of the bottom culvert, in order to keep it filled with water, to prevent the injury which the bottom of it might receive from the water discharged from the upper culverts.

The side walls which retain the earth at the entrance to the culverts should be arranged with grooves to receive pieces of scantling laid horizontally between the walls, termed *stop-planks*, to form a temporary dam, and cut off the water of the reservoir, in case of repairs to the culverts, or to the face of the dam.

The valves are small sliding gates, which are raised and lowered by a rack and pinion, or by a screw. The cross section of the culvert is contracted by a partition, either of masonry or timber, at the point where the valve is placed.

791. Dams of masonry are water-tight walls, of suitable forms and dimensions to prevent filtration, and resist the pressure of water in the reservoir. The most suitable cross-section is that of a trapezoid, the face towards the water being

vertical, and the exterior face inclined with a suitable batter to give the wall sufficient stability. The wall should be at least four feet thick at the water line, to prevent filtration, and this thickness may be increased as circumstances may seem to require. Buttresses should be added to the exterior facing, to give the wall greater stability.

792. Suitable dispositions should be made to relieve the dam from all surplus water during wet seasons. For this purpose arrangements should be made for cutting off the sources of supply from the reservoir; and a cut, termed a *waste-weir* (Fig 242), of suitable width and depth, should be made at some point along the top of the dam, and be faced with stone, or wood, to give an outlet to the water over the dam. In high dams the total fall of the water should be divided into several partial falls, by dividing the exterior surface over which the water runs into offsets. To break the shock of the water upon the horizontal surface of the offset, it should be kept covered with a sheet of water retained by a dam placed across its outlet.

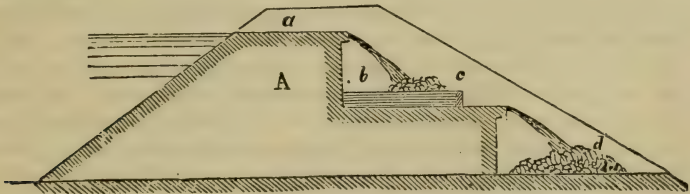


Fig. 242—Represents a section of a waste-weir divided into two falls.

A, body of the dam.

a, top of the waste-weir.

b, pool, formed by a stop-plank dam at c, to break the fall of the water.

d, covering of loose stone to break the fall of the water from the pool above.

793. In extensive reservoirs, in which a large surface is exposed to the action of the winds, waves might be forced over the top of the dam, and subject it to danger; in such cases the precaution should be taken of placing a parapet wall towards the outer edge of the top of the dam, and facing the top throughout with flat stones laid in mortar.

794. **Lift of locks.** The engineer is not always left free to select between the two systems—that of isolated locks and locks in flights; for the form of the natural surface of the ground may compel him to adopt a flight of locks at certain points. As to the comparative expense of the two methods, a flight is in most cases cheaper than the same number of single locks, as there are certain parts of the masonry which

can be suppressed. There is also an economy in the suppression of the small gates, which are not needed in flights. It is, however, more difficult to secure the foundations of combined than of single locks from the effects of the water, which forces its way from the upper to the lower level under the locks. Where an active trade is carried on, a double flight is sometimes arranged; one for the ascending, the other for the descending boats. In this case the water which fills one flight may, after the passage of the boat, be partly used for the other, by an arrangement of valves made in the side wall separating the locks.

The lift of locks is a subject of importance, both as regards the consumption of water for the navigation, and the economy of construction. Locks with great lifts, as may be seen from the remarks on the passage of boats, consume more water than those with small lifts. They require also more care in their construction, to preserve them from accidents, owing to the great pressure of water against their sides. The expense of construction is otherwise in their favor; that is, the expense will increase with the total number of locks, the height to be ascended being the same. The smallest lifts are seldom less than five feet, and the greatest, for ordinary canals, not over twelve; medium lifts of seven or eight feet are considered the best under every point of view. This is a point, however, which cannot be settled arbitrarily, as the nature of the foundations, the materials used, the embankments around the locks, the changes in the direction of the canal, caused by varying the lifts, are so many modifying causes, which should be carefully weighed before adopting a definite plan.

The lifts of a flight should be the same throughout; but in isolated locks the lifts may vary according to circumstances. If the supply of water from the summit level requires to be economized with care, the lifts of locks which are furnished from it may be less than those lower down.

795. Levels. The position and the dimensions of the levels must be mainly determined by the form of the natural surface. Those points are naturally chosen to pass from one level to another, or as the positions for the locks, where there is an abrupt change in the surface.

A level, by a suitable modification of its cross section, can be made as short as may be deemed desirable; there being but one point to be attended to in this, which is, that a boat passing between the two locks, at the ends of the level, will have time to enter either lock before it can ground, on the

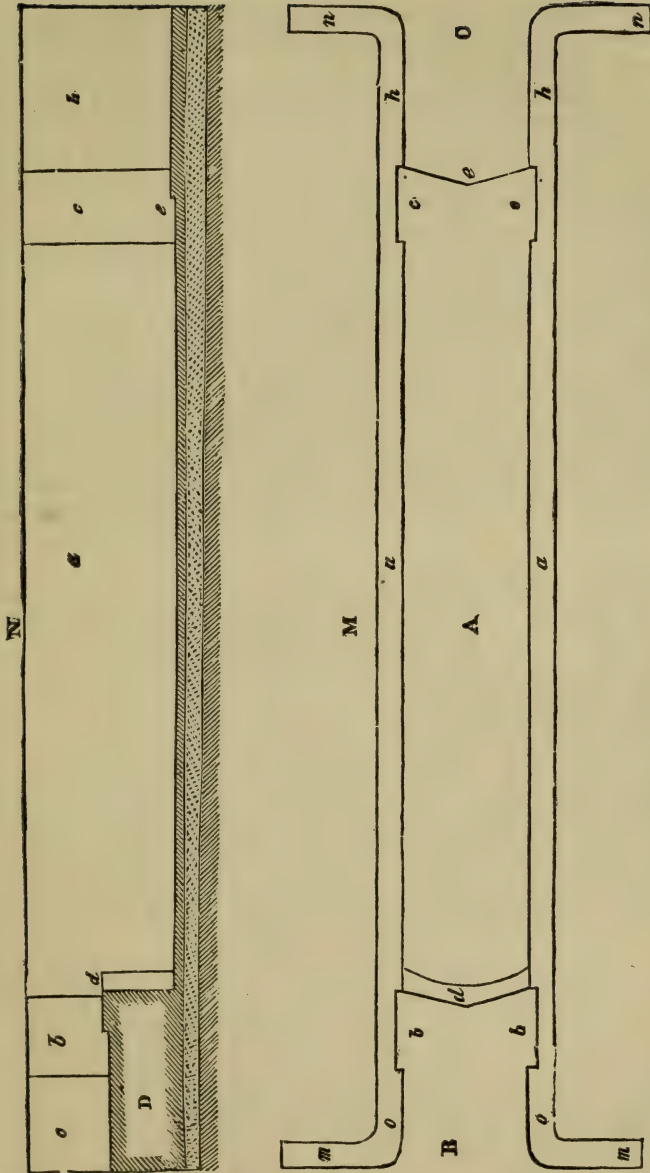


Fig. 243—Represents a plan M, and a section N, through the axis of a single lock laid on a beton foundation.—A, lock-chamber. B, fore-bay. C, tail-bay. *a, a*, chamber-walls. *b, b*, recesses or chambers in the side walls for upper gates. *c, c*, lower-gate chambers. *d, d*, lift wall and upper mitre sill. *e, e*, lower mitre sill. *h, h*, tail walls. *o, o*, head walls. *m, m*, upper wing, or return walls. *n, n*, lower wing walls. D, body of masonry, under the fore-bay.

supposition that the water drawn off to fill the lower lock, while the boat is traversing the level, will just reduce the depth to the draught of the boat.

796. Locks. A lock (Fig. 243) may be divided into three distinct parts: 1st. The part included between the two gates, which is termed the *chamber*. 2d. The part above the upper gates, termed the *fore*, or *head-bay*. 3d. The part below the lower gates, termed the *aft*, or *tail-bay*.

797. The lock chamber must be wide enough to allow an easy ingress and egress to the boats commonly used on the canal; a surplus width of one foot over the width of the boat across the beam is usually deemed sufficient for this purpose. The length of the chamber should be also regulated by that of the boats; it should be such, that when the boat enters the lock from the lower level, the tail-gates may be shut without requiring the boat to unship its rudder.

The plan of the chamber is usually rectangular, as this form is, in every respect, superior to all others. In the cross section of the chamber (Fig. 244) the sides receive generally a slight




Fig. 244—Represents a section of Fig. 243, through the chamber.

A, A, chamber walls.

B, chamber formed with an inverted-arch bottom.

batter; as when so arranged they are found to give greater facility to the passage of the boat than when vertical. The bottom of the chamber is either flat or curved; more water will be required to fill the flat-bottomed chamber than the curved, but it will require less masonry in its construction.

798. The chamber is terminated just within the head gates by a vertical wall, the plan of which is usually curved. As this wall separates the upper from the lower level, it is termed the *lift-wall*; it is usually of the same height as the lift of the levels. The top of the lift-wall is formed of cut stone, the vertical joints of which are normal to the curved face of the wall; this top course projects from six to nine inches above the bottom of the upper level, presenting an angular point, for the bottom of the head-gates, when shut, to rest against. This is termed the *mitre-sill*. Various degrees of opening have been given to the angle between the two branches of the mitre-sill; it is, however, generally so

determined, that the perpendicular of the isosceles triangle, formed by the two branches, shall vary between one-fifth and one-sixth of the base.

As stone mitre-sills are liable to injury from the shock of the gate, they are now usually constructed of timber (Fig. 245),




Fig. 245—Represents a plan of a wooden mitre-sill, and a horizontal section of a lock-gate (Fig. 246) closed.

a, a, mitre-sill framed with the pieces *b* and *c*, and firmly fastened to the side walls *A, A*.

d, section of quoin posts of lock-gate.

e, section of mitre posts.

by framing two strong beams with the proper angle for the gate when closed, and securing them firmly upon the top of the lift-wall. It will be well to place the top of the mitre-sill on the lift-wall a little lower than the bottom of the canal, to preserve it from being struck by the keel of the boat on entering or leaving the lock.

799. The cross section of the chamber walls is usually trapezoidal; the facing receives a slight batter. The chamber walls are exposed to two opposite efforts; the water in the lock on one side, and the embankment against the wall on the other. The pressure of the embankment is the greater as well as the more permanent effort of the two. The dimensions of the wall must be regulated by this pressure. The usual manner of doing this, is to make the wall four feet thick at the water line of the upper level, to secure it against filtration; and then to determine the base of the batter, so that the mass of masonry shall present sufficient stability to counteract the tendency of the pressure. The spread, and other dimensions of the foundations, will be regulated according to the nature of the soil, in the same way as in other structures.

800. The bottom of the chamber, as has been stated, may be either flat or curved. The flat bottom is suitable to very firm soils, which will neither yield to the vertical pressure of the chamber walls, nor admit the water to filter from the upper level under the bottom of the lock. In either of the contrary cases, the bottom should be made with an inverted arch, as this form will oppose greater resistance to the upward pressure of the water under the bottom, and will serve to distribute the weight of the walls over the portion of the foundation under the arch. The thickness of the masonry of

the bottom will depend on the width of the chamber and the nature of the soil. Were the soil a solid rock, no bottoming would be requisite; if it is of soft mud, a very solid bottoming, from three to six feet in thickness, might be requisite.

301. The principal danger to the foundations arises from the water which may filter from the upper to the lower level, under the bottom of the lock. One preventive for this, but not an effectual one, is to drive sheeting piles across the canal at the end of the head-bay; another, which is more expensive, but more certain in its effects, consists in forming a deep trench of two or three feet in width, just under the head-bay, and filling it with beton, which unites at the top with the masonry of the head-bay. Similar trenches might be placed under the chamber were it considered necessary.

302. The *lift-wall* usually receives the same thickness as the chamber walls; but, unless the soil is very firm, it would be more prudent to form a general mass of masonry under the entire head-bay, to a level with the base of the chamber foundations, of which mass the lift-wall should form a part.

303. The *head-bay* is enclosed between two parallel walls, which form a part of the side walls of the lock. They are terminated by two wing walls, which it will be found most economical to run back at right angles with the side walls. A recess, termed the *gate-chamber*, is made in the wall of the head-bay; the depth of this recess should be sufficient to allow the gate, when open, to fall two or three inches within the facing of the wall, so that it may be out of the way when a boat is passing; the length of the recess should be a few inches more than the width of the gate. That part of the recess where the gate turns on its pivot is termed the *hollow quoin*; it receives what is termed the *heel*, or *quoin-post* of the gate, which is made of a suitable form to fit the hollow quoin. The distance between the hollow quoins and the face of the lift-wall will depend on the pressure against the mitresill, and the strength of the stone, eighteen inches, will generally be found amply sufficient.

The side walls need not extend more than twelve inches beyond the other end of the gate-chamber. The wing walls may be extended back to the total width of the canal, but it will be more economical to narrow the canal near the lock, and to extend the wing walls only about two feet into the banks, or sides. The dimensions of the side and wing walls of the head-bay are regulated in the same way as the chamber walls.

The bottom of the head-bay is flat, and on the same level with the bottom of the canal; the exterior course of stones at the entrance to the lock should be so jointed as not to work loose.

804. The *gate-chambers* for the lower gates are made in the chamber walls; and it is to be observed, that the bottom of the chamber, where the gates swing back, should be flat, or be otherwise arranged not to impede the play of the gates.

805. The *side walls of the tail-bay* are also a part of the general side walls, and their thickness is regulated as in the preceding cases. Their length will depend chiefly on the pressure which the lower gates throw against them when the lock is full; and partly on the space required by the lock-men in opening and shutting gates manœuvred by the balance beam. A calculation must be made for each particular case, to ascertain the most suitable length. The side walls are also terminated by wing walls, similarly arranged to those of the head-bay. The points of junction between the wing and side walls should, in both cases, either be curved, or the stones at the angles be rounded off. One or two perpendicular grooves are sometimes made in the side walls of the tail-bay, to receive stop-planks, when a temporary dam is needed, to shut off the water of the lower level from the chamber, in case of repairs, etc. Similar arrangements might be made at the head-bay, but they are not indispensable in either case.

The strain on the walls at the hollow quoins is greater than at any other points, owing to the pressure at those points from the gates, when they are shut, and to the action of the gates when in motion; to counteract this, and strengthen the walls, buttresses should be placed at the back of the walls in the most favorable position behind the quoins to subserve the object in view.

The bottom of the tail-bay is arranged, in all respects, like that of the head-bay.

806. The *top of the side walls* of the lock may be from one to two feet above the general level of the water in the upper reach; the top course of the masonry being of heavy large blocks of cut stone, although this kind of coping is not indispensable, as smaller masses have been found to suit the same purpose, but they are less durable. As to the masonry of the lock in general, it is only necessary to observe that those parts alone need be of cut stone where there is great wear and tear from any cause, as at the angles generally; or

where an accurate finish is indispensable, as at the hollow quoins. The other parts may be of brick, rubble, beton, etc., but every part should be laid in the best hydraulic mortar.

807. The *filling and emptying the lock chamber* have given rise to various discussions and experiments, all of which have been reduced to the comparative advantages of letting the water in and off by valves made in the gates themselves, or by culverts in the side walls, which are opened and shut by valves. When the water is let in through valves in the gates, its effects on the sides and bottom of the chamber are found to be very injurious, particularly in high lift-walls; besides the inconvenience resulting from the agitation of the boat in the lock. To obviate this, in some degree, it has been proposed to give the lift-wall the form of an inclined curved surface, along which the water might descend without producing a shock on the bottom.

808. The *side culverts* are small arched conduits, of a circular or an elliptical cross section, which are made in the mass of masonry of the side walls, to convey the water from the upper level to the chamber. These culverts, in some cases, run the entire length of the side walls, on a level with the bottom of the chamber, from the lift-wall to the end of the tail-wall, and have several outlets leading to the chamber. They are arranged with two valves, one to close the mouth of the culvert, at the upper level, the other to close the outlet from the chamber, to the lower level. This is, perhaps, one of the best arrangements for side culverts. They all present the same difficulty in making repairs when out of order, and they are moreover very subject to accidents. They are therefore on these accounts inferior to valves in the gates.

809. It has also been proposed, to avoid the inconveniences of culverts, and the disadvantages of lift-walls, by suppressing the latter, and gradually increasing the depth of the upper level to the bottom of the chamber. This method presents a saving in the mass of masonry, but the gates will cost more, as the head and tail gates must be of the same height. It would entirely remove the objection to valves in the gates, as the current through them, in this case, would not be sufficiently strong to injure the masonry.

810. The *bottom of the canal* below the lock should be protected by what is termed an *apron*, which is a covering of plank laid on a grillage, or else one of brushwood and dry stone. The sides should also be faced with timber or dry stone. The length of this facing will depend on the strength of the

current; generally not more than from fifteen to thirty feet from the lock will require it. The entrance to the head-bay is, in some cases, similarly protected, but this is unnecessary, as the current has but a very slight effect at that point.

811. Locks constructed of timber and dry stone, termed *composite-locks*, are to be met with on several of the canals of the United States. The side walls are formed of dry stone carefully laid; the sides of the chamber being faced with plank nailed to horizontal and upright timbers, which are firmly secured to the dry stone walls. The walls rest upon a platform laid upon heavy beams placed transversely to the axis of the lock. The bottom of the chamber usually receives a double thickness of plank. The quoin-posts and mitre-sills are formed of heavy beams.

812. Lock Gates. A lock gate (Fig. 246) is composed of

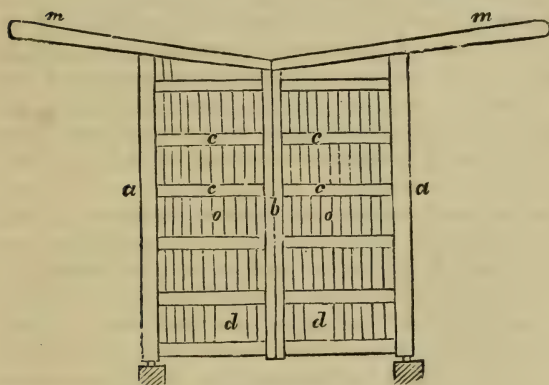


Fig. 246—Represents the elevation of a lock-gate closed.

- a, a, quoin-posts.
- b, mitre-posts.
- c, c, cross pieces framed into a and b, and firmly connected with them by wrought-iron plates.
- o, plank or sheathing of the gate.
- d, valve.
- m, m, balance-beams.

two leaves, each leaf consisting of a solid framework covered on the side towards the water with thick plank made watertight. The frame usually consists of two uprights, of several horizontal cross pieces let into the uprights, and sometimes a diagonal piece or brace, intended to keep the frame of an invariable form, is added. The upright, around which the leaf turns, termed the *quoin* or *heel-post*, is rounded off on the back to fit in the hollow quoin; it is made slightly eccentric with it, so that it may turn easily without rubbing against the quoin; its lower end rests on an iron *gudgeon*, to which it is fitted by a corresponding indentation in an iron *socket* on the end; the upper extremity is secured to the side walls by an iron *collar*, within which the post turns. The collar is so arranged that it can be easily fastened to, or loosened from, two iron bars,

termed *anchor-irons*, which are firmly attached by bolts, or a lead sealing, to the top course of the walls. One of the anchor-irons is placed in a line with the leaf when shut, the other in a line with it when open, to resist most effectually the strain in those two positions of the gate. The opposite upright, termed the *mitre-post*, has one edge bevelled off to fit against the mitre-post of the other leaf of the gate.

813. A long heavy beam, termed a *balance-beam*, from its partially balancing the weight of the leaf, rests on the quoin-post, to which it is secured, and is mortised with the mitre-post. The balance-beam should be about four feet above the top of the lock, to be readily manœuvred; its principal use being to open and shut the leaf.

814. The top cross piece of the gate should be about on a level with the top of the lock; the bottom cross piece should swing clear of the bottom of the lock. The position of the intermediate cross pieces may be made to depend on their dimensions: if they are of the same dimensions, they should be placed nearer together at the bottom, as the pressure of the water is there greatest; but, by making them of unequal dimensions, they may be placed at equal distances apart; this, however, is not of much importance except for large gates, and considerable depths of water.

The plank may be arranged either parallel to the uprights, or parallel to the diagonal brace; in the latter position they will act with the brace to preserve the form of the frame.

815. A wide board, supported on brackets, is often affixed to the gates, both for the manœuvre of the machinery of the valves, and to serve as a foot-bridge across the lock. The valves are small gates which are arranged to close the openings made in the gates for letting in or drawing off the water. They are arranged to slide up and down in grooves, by the aid of a rack and pinion, or a square screw; or they may be made to open or shut by turning on a vertical axis, in which case they are termed *paddle gates*. The openings in the upper gates are made between the two lowest cross pieces. In the lower gates the openings are placed just below the surface of the water in the reach. The size of the opening will depend on the time in which it is required to fill the lock.

816. Accessory Works. Under this head are classed those constructions which are not a part of the canal proper, although generally found necessary on all canals: as the culverts for conveying off the water-courses which intersect the line of the canal; the inlets of feeders for the supply of water; aqueduct bridges, etc., etc.

817. Culverts. The disposition to be made of water-courses intersecting the line of the canal will depend on their size, the character of their current, and the relative positions of the canal and stream.

Small brooks which lie lower than the canal may be conveyed under it through an ordinary culvert. If the level of the canal and brook is nearly the same, it will then be necessary to make the culvert in the shape of an inverted syphon, and it is therefore termed a *broken-back* culvert. If the water of the brook is generally limpid, and its current gentle, it may, in the last case, be received into the canal. The communication of the brook, or feeder, with the canal, should be so arranged that the water may be shut off, or let in at pleasure, in any quantity desired. For this purpose a cut is made through the side of the canal, and the sides and bottom of the cut are faced with masonry laid in hydraulic mortar. A sliding gate, fitted into two grooves made in the side walls, is manœuvred by a rack and pinion, so as to regulate the quantity of water to be let in. The water of the feeder, or brook, should first be received in a basin, or reservoir, near the canal, where it may deposit its sediment before it is drawn off. In cases where the line of the canal is crossed by a torrent, which brings down a large quantity of sand, pebbles, etc., it may be necessary to make a permanent structure over the canal, forming a channel for the torrent; but if the discharge of the torrent is only periodical, a movable channel may be arranged, for the same purpose, by constructing a boat with a deck and sides to form the water-way of the torrent. The boat is kept in a recess in the canal near the point where it is used, and is floated to its position, and sunk when wanted.

818. Aqueducts, etc. When the line of the canal is intersected by a wide water-course, the communication between the two shores must be effected either by a canal aqueduct bridge, or by the boats descending from the canal into the stream. As the construction of aqueduct bridges has already been considered, nothing farther on this point need here be added. The expedient of crossing the stream by the boats may be attended with many grave inconveniences in water-courses liable to freshets, or to considerable variations of level at different seasons. In these cases locks must be so arranged on each side, where the canal enters the stream, that boats may pass from the one to the other under all circumstances of difference of level between the two. The locks and the portions of the canal which join the stream must be secured

against damage from freshets by suitable embankments; and, when the summer water of the stream is so low that the navigation would be impeded, a dam across the stream will be requisite to secure an adequate depth of water during this epoch.

819. Canal-Bridges. Bridges for roads over a canal, termed *canal-bridges*, are constructed like other structures of the same kind. In planning them the engineer should endeavor to give sufficient height to the bridge to prevent those accidents, of but too frequent occurrence, from persons standing upright on the deck of the passage-boat while passing under a bridge.

A novel device, which, on account of its diminutive size, is hardly worthy of the name of a bridge, is used for crossing the canal at Williamsport, Pennsylvania. It is really a small pivot bridge, so constructed that a boat may push it open either way as desired as it passes through, and which will close itself after the boat has passed. As it opens it moves up an inclined plane, so that its weight will aid in closing it. A weight, which is attached to a rope at one end, the rope passing over a pulley and attached to the bridge at the other, is also employed in closing it.

820. Waste-Weir. Waste-weirs must be made along the levels to let off the surplus water. The best position for them is at points where they can discharge into natural water-courses. The best arrangement for a waste-weir is to make a cut through the side of the canal to a level with the bottom of it, so that, in case of necessity, the waste-weir may also serve for draining the level. The sides and bottom of the cut must be faced with masonry, and have grooves left in them to receive stop-plank, or a sliding gate, over which the surplus water is allowed to flow, under the usual circumstances, but which can be removed, if it be found necessary, either to let off a larger amount of water, or to drain the level completely.

821. Temporary Dams. In long levels an accident happening at any one point might cause serious injury to the navigation, besides a great loss of water. To prevent this, in some measure, the width of the canal may be diminished, at several points of a long level, to the width of a lock, and the sides, at these points, may be faced with masonry, arranged with grooves and stop-planks, to form a temporary dam for shutting off the water on either side.

822. Tide, or Guard Lock. The point at which a canal enters a river requires to be selected with judgment. Gen-

erally speaking, a bar will be found in the principal water-course at or below the points where it receives its affluents. When the canal, therefore, follows the valley of an affluent, its outlet should be placed below the bar, to render its navigation permanently secure from obstruction. A large basin is usually formed at the outlet, for the convenience of commerce; and the entrance from this basin to the canal, or from the river to the basin, is effected by means of a lock with double gates, so arranged that a boat can be passed either way, according as the level in the one is higher or lower than that in the other. A lock so arranged is termed a *tide* or *guard lock*, from its uses. The position of the tail of this lock is not indifferent in all cases where it forms the outlet to the river; for, were the tail placed up stream, it would be more difficult to pass in or out than if it were down stream.

823. The general dimensions of canals and their locks in this country and in Europe, with occasional exceptions, do not differ in any considerable degree.

English Canals. Two classes of canals are to be met with in England, differing materially in their dimensions. The following are the usual dimensions of the cross section of the largest size, and those of their locks:—

Width of section at the water level, from 36 to 40 feet.	
Width at bottom.....	24 “
Depth.....	5 “
Length of lock between mitre-sills.....	75 to 80 “
Width of chamber.....	15 “

The Caledonian canal, in Scotland, which connects Loch Eil on the Western sea with Murray Firth on the Eastern, is remarkable for its size, which will admit of the passage of frigates of the second class. The following are the principal dimensions of the cross section of the canal and its locks:—

Width of canal at the water level.....	110 feet.
Width at bottom.....	50 “
Depth of water... ..	20 “
Width of berm.....	6 “
Length of lock between mitre-sills.....	180 “
Width of chamber at top.....	40 “
Lift of lock.....	8 “

The side walls of the locks are built with a curved batter, they are of the uniform thickness of 6 feet, and are strengthened by counterforts, placed about 15 feet apart, which are 4 feet wide and of the same thickness. The bottom of the chamber is formed with an inverted arch.

French Canals. In France the following uniform system has been established for the dimensions of canals and their locks :—

Width of canal at water level.....	52 feet.
Width at bottom.....	33 to 36 “
Depth of water.....	5 “
Length of lock between mitre-sills.....	115 “
Width of lock.....	17 “

The boats adapted to these dimensions are from 105 to 108 feet long, $16\frac{1}{2}$ feet across the beam, and have a draught of 4 feet.

Width of canal at top.....	50 feet.
Width at bottom.....	30 “
Depth of water.....	5 “
Length of locks.....	100 “
Width of locks.....	15 “

The Rideau canal, which connects Lake Ontario with the River Ottawa, is arranged for steam navigation. A considerable portion of this line consists of slack-water navigation, formed by connecting the natural water-courses between the outlets of the canal. The length of the locks on this canal is 134 feet between the mitre-sills, and their width 33 feet.

The Welland canal, between lakes Erie and Ontario, as originally constructed, received the following dimensions :—

Width of canal at top.....	56 feet.
Width at bottom.....	24 “
Depth of water.....	8 “
Length of locks between mitre-sills.....	110 “
Width of locks.....	22 “

The canals and locks made to avoid the dangerous rapids of the St. Lawrence are in all respects among the largest in the world. The following are the dimensions of the portion of the canal and the locks between Long Sault and Cornwall :—

Width of canal at top.....	132 feet.
Width at bottom.....	100 “
Depth of water.....	8 “
Width of tow-path.....	12 “
Length of locks between mitre-sills.....	200 “
Width of locks at top.....	56.6 “
Width of locks at bottom.....	43 “

A berm of 5 feet is left on each side between the water-

way and the foot of the interior slope of the tow-path. The height of the tow-path is 6 feet above the berm. By increasing the depth of water in the canal to 10 feet, the water-line at top can be increased to 150 feet.

The dimensions of the Erie canal as enlarged are :—

Width of canal at top, with bench walls....	81 feet.
Width of canal at top, without bench walls.	75 “
Width of canal at water surface.....	70 “
Width of canal at bottom, with bench walls.	42 “
Width of canal at bottom, without bench walls.....	52½ “
Depth of water.....	7 “
Width of tow-path.....	14 “
Width of locks at top.....	18 “ 10 in.
Width of locks at bottom.....	17 “ 4¼ in.
Length of lock (between mitre-sills).....	110 “

824. Locomotion on Canals. In early times boats were drawn or pushed along by servants or slaves. In civilized countries horses and mules have been chiefly used. A few years since several attempts were made to use steam power, by driving the boat like a propeller, and although it would do the work, yet it was mostly abandoned after a few months. The wheel created such a disturbance in the water as caused it to wash the banks and thus damage them.

A system, known as the *Belgian system*, has been quite extensively used in some of the European countries. It consists of a cable which passes from one end of the canal to the other, and is sunk in it. It is wound around a wheel which is at one end of the boat. Steam power is applied to turn the wheel, and, as the friction of the rope on the wheel prevents it from slipping, it will take up the cable on one side of the wheel and let it out on the other, and thus draw the boat along. One of the objections to this plan is, it requires a large amount of slack cable to accommodate a large traffic, and every boat must draw in all the slack every time it passes over the canal.

During the winter of 1870-71 the Legislature of the State of New York offered a prize of \$100,000 to the party who would make an acceptable mode of applying steam for propelling canal boats on the canals, and no plan was to be considered which involved the Belgian system. The engineer in charge of this project states that in round numbers a thousand plans, coming from all parts of the world, have been presented, but up to the present time the prize has not been awarded.

CHAPTER IX.

RIVERS.

825. *Natural features of Rivers.* All rivers present the same natural features and phenomena, which are more or less strongly marked and diversified by the character of the region through which they flow. Taking their rise in the highlands, and gradually descending thence to some lake, or sea, their beds are modified by the nature of the soil of the valleys in which they lie, and the velocities of their currents are affected by the same cause. Near their sources, their beds are usually rocky, irregular, narrow, and steep, and their currents are rapid. Approaching their outlets, the beds become wider and more regular, the declivity less, and the current more gentle and uniform. In the upper portions of the beds, their direction is more direct, and the obstructions met with are usually of a permanent character, arising from the inequalities of the bottom. In the lower portions, the beds assume a more tortuous course, winding through their valleys, and forming those abrupt bends, termed *elbows*, which seem subject to no fixed laws; and here are found those obstructions, of a more changeable character, termed *bars*, which are caused by deposits in the bed, arising from the wear of the banks by the current.

826. The relations which are found to exist between the cross section of a river, its longitudinal slope, the nature of its bed, and its volume of water, are termed the *regimen* of the river. When these relations remain permanently invariable, or change insensibly with time, the river is said to have a *fixed regimen*.

Most rivers acquire in time a fixed regimen, although periodically, and sometimes accidentally, subject to changes from freshets caused by the melting of snow, and heavy falls of rain. These variations in the volume of water thrown into the bed cause corresponding changes in the velocity of the current, and in the form and dimensions of the bed. These changes will depend on the character of the soil, and the width of the valley. In narrow valleys, where the banks do not readily yield to the action of the current, the effects of

any variation of velocity will only be temporarily to deepen the bed. In wide valleys, where the soil of the banks is more easily worn by the current than the bottom, any increase in the volume of water will widen the bed; and if one bank yields more than the other, an elbow will be formed, and the position of the bed will be gradually shifted towards the concave side of the elbow.

827. The formation of elbows occasions also variations in the depth and velocity of the water. The greatest depth is found at the concave side. At the straight portions which connect two elbows, the depth is found to decrease, and the velocity of the current to increase. The bottom of the bed thus presents a series of undulations, forming shallows and deep pools, with rapid and gentle currents.

828. Bars are formed at those points, where from any cause the velocity of the current receives a sudden check. The particles suspended in the water, or borne along over the bottom of the bed by the current, are deposited at these points, and continue to accumulate, until, by the gradual filling of the bed, the water acquires sufficient velocity to bear farther on the particles that reach the bar, when the river at this point acquires and retains a fixed regimen, until disturbed by some new cause.

829. The points at which these changes of velocity usually take place, and near which bars are found, are at the junction of a river with its affluents, at those points where the bed of the river receives a considerable increase in width, at the straight portions of the bed between elbows, and at the outlet of the river to the sea. The character of the bars will depend upon that of the soil of the banks, and the velocity of the current. Generally speaking, the bars in the upper portions of the bed will be composed of particles which are larger than those by which they are formed lower down. These accumulations at the mouths of large rivers form in time extensive shallows, and great obstructions to the discharge of the water during the seasons of freshets. The river then, not finding a sufficient outlet by the ordinary channel, excavates for itself others through the most yielding parts of the deposits. In this manner are formed those features which characterize the outlets of many large rivers, and which are termed *delta*, after the name given to the peculiar shape of the outlets of the Nile.

830. **River Improvements.** There is no subject that falls within the province of the engineer's art, that presents greater difficulties and more uncertain issues than the im-

provement of rivers. Ever subject to important changes in their regimen, as the regions by which they are fed are cleared of their forests and brought under cultivation, one century sees them deep, flowing with an equable current, and liable only to a gradual increase in volume during the seasons of freshets; while the next finds their beds a prey to sudden and great freshets, which leave them, after their violent passage, obstructed by ever shifting bars and elbows. Besides these revolutions brought about in the course of years, every obstruction temporarily placed in the way of the current, every attempt to guard one point from its action by any artificial means, inevitably produces some corresponding change at another, which can seldom be foreseen, and for which the remedy applied may prove but a new cause of harm. Thus, a bar removed from one point is found gradually to form lower down; one bank protected from the current's force transfers its action to the opposite one, on any increase of volume from freshets, widening the bed, and frequently giving a new direction to the channel. Owing to these ever varying causes of change, the best weighed plans of river improvement sometimes result in complete failure.

831. In forming a plan for a river improvement, the principal objects to be considered by the engineer, are, 1st. The means to be taken to protect the banks from the action of the current. 2d. Those to prevent inundations of the surrounding country. 3d. The removal of bars, elbows and other natural obstructions to navigation. 4th. The means to be resorted to for obtaining a suitable depth of water for boats, of a proper tonnage, for the trade on the river.

832. Means for protecting the banks. To protect the banks, either the velocity of the current in-shore must be decreased so as to lessen its action on the soil; or else a facing of some material sufficiently durable to resist its action must be employed. The former method may be used when the banks are low and have a gentle declivity. The simplest plan for this purpose consists either in planting such shrubbery on the declivity as will thrive near water; or by driving down short pickets and interlacing them with twigs, forming a kind of wicker-work. These constructions break the force of the current, and diminish its velocity near the shore, and thus cause the water to deposit its finer particles, which gradually fill out and strengthen the banks. If the banks are high, and are subject to cave in from the action of the current on their base, they may be either cut down to a gentle declivity, as in

the last case ; or else they may receive a slope of nearly 45° , and be faced with dry stone, care being taken to secure the base by blocks of loose stone, or by a facing of brush and stone laid in alternate layers.

833. Measures against inundations. At the points in the course of a river where inundations are to be apprehended, the water-way, if practicable, should be increased ; all obstructions to the free discharge of the water below the point should be removed ; and dikes of earth, usually termed *levées*, should be raised on each side of the river. By increasing the water-way a temporary improvement only will be effected ; for, except in the season of freshets, the velocity of the current at this point will be so much decreased as to form deposits, which, at some future day, may prove a cause of damage. In confining the water between *levées*, two methods have been tried : the one consists in leaving a water-way strictly necessary for the discharge of freshets ; the other in giving the stream a wide bed. The Po in Italy and the Mississippi present examples of the former method ; the effect of which in both cases has been to raise the bed of the stream so much that in many parts the water is habitually above the natural surface of the country, leaving it exposed to serious inundations should the *levées* give way. The other method has been tried on the Loire in France, and observation has proved that the general level of the bed has not sensibly risen for a long series of years ; but it has been found that the bars, which are formed after each freshet, are shifted constantly by the next, so that when the waters have subsided to their ordinary state, the navigation is extremely intricate from this cause. Other means have been tried, such as opening new channels at the exposed points, or building dams above them to keep the water back ; but they have all been found to afford only a temporary relief.

834. Elbows. The constant wear of the bank, and shifting of the channel towards the concave side of elbows, have led to various plans for removing the inconveniences which they present to navigation. The method which has been most generally tried for this purpose consists in building out dikes, termed *wing-dams*, from the concave side into the stream, placing them either at right angles to the thread of the current, or obliquely down stream, so as to deflect the current towards the opposite shore.

Wing-dams are usually constructed either of blocks of stone, of crib-work formed of heavy timbers filled in with broken stone, or of alternate layers of gravel and fascines.

Within a few years back, wing-dams, consisting simply of a series of vertical frames, or ribs (Fig. 247), strongly connected together, and covered on the up-stream side by thick plank, which present a broken inclined plane to the current, the lower part of which is less steep than the upper, have been used upon the Po, with, it is stated, complete success, for arresting the wear of a bank by the current. These dams are placed at some distance above the point to be protected, and their plan is slightly convex on the up-stream side.

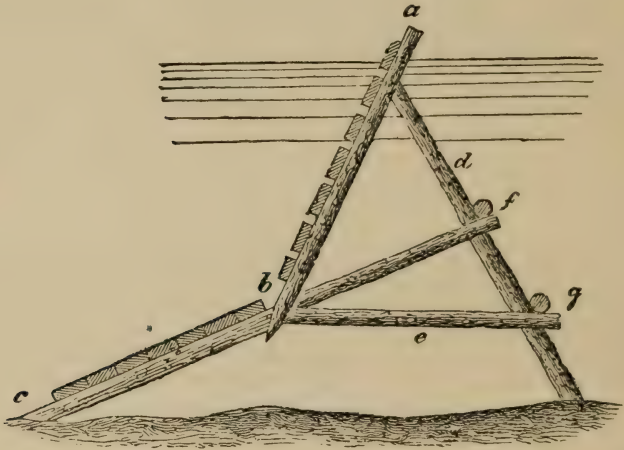


Fig. 247—Represents a section of the timber wing-dams on the Po, formed of plank nailed on the inclined pieces of the ribs.
a b and *b c*, inclined faces of the dam, the first making an angle of 63° , and the second of 23° with the horizon.
d and *e* pieces of the rib.
f and *g* horizontal pieces connecting the ribs.

Wing-dams of the ordinary form and construction are now regarded, from the experience of a long series of years on the Rhine, and some other rivers in Europe, as little serviceable, if not positively hurtful, as a river improvement, and the abandonment of their use has been strongly urged by engineers in France.

The action of the current against the side of the dam causes whirls and counter-currents, which are found to undermine the base of the dam, and the bank adjacent to it. Shallows and bars are formed in the bed of the stream, near the dam, by the débris borne along by the current after it passes the dam, giving very frequently a more tortuous course to the channel than it had naturally assumed in the elbow.

The best method yet found of arresting the progress of an elbow is to protect the concave bank by a facing of dry stone, formed by throwing in loose blocks of stone along the foot of the bank, and giving them the slope they naturally assume when thus thrown in.

Wing-walls were put into the Hudson River many years since for the purpose of removing the bars and improving the stream for navigable purposes. The result has been that they produced a scour in the narrowed part of the stream which removed the sand and other materials of the bar to points lower down in the stream where it was again deposited; thus removing the previous obstruction only to produce a worse one in a new place.

Gen. Totten, in an able report to the Government on the improvement of rivers having bars, showed very clearly the error of attempting to improve rivers by means of wing-dams. He recommended the establishment of a uniform channel by *longitudinal* dikes, made of continuous piles or of walls of masonry. This plan has been adopted more recently and with good results.

835. Elbows upon most rivers finally reach that state of development in which the wear upon the concave side, from the action of the current, will be entirely suspended, and the regimen of the river at these points will remain stable. This state will depend upon the nature of the soil of the banks and bed, and the character of the freshets. From observations made upon the Rhine, it is stated that elbows, with a radius of curvature of nearly 3,000 yards, preserve a fixed regimen; and that the banks of those which have a radius of about 1,500 yards are seldom injured, if properly faced.

836. Attempts have, in some cases, been made to shorten and straighten the course of a river, by cutting across the tongue of land that forms the convex bank of the elbow, and turning the water into a new channel. It has generally been found that the stream in time forms for itself a new bed of nearly the same character as it originally had.

837. Bars. To obtain a sufficient depth of water over bars, the deposit must either be scooped up by machinery, and be conveyed away, or be removed by giving an increased velocity to the current. When the latter plan is preferred, an artificial channel is formed, by contracting the natural way, confining it between two low dikes, which should rise only a little above the ordinary level of low water, so that a sufficient outlet may be left for the water during the season of freshets, by allowing it to flow over the dams.

If the river separates into several channels at the bar, dams should be built across all except the main channel, so that by throwing the whole of the water into it the effects of the current may be greater upon the bed.

The longitudinal dikes, between which the main channel is confined, should be placed as nearly as practicable in the direction which the channel has naturally assumed. If it be deemed advisable to change the position of the channel, it should be shifted to that side of the bed which will yield most readily to the action of the current.

838. In situations where large reservoirs can be formed near the bar, the water from them may be used for removing it. For this purpose an outlet is made from the reservoir, in the direction of the bar, which is closed by a gate that turns upon a vertical axis, and is so arranged that it can be suddenly thrown open to let off the water. The chase of water formed in this way sweeping over the bar will prevent the accumulation of deposits upon it. This plan is frequently resorted to in Europe for the removal of deposits that accumulate at the mouth of harbors in those localities where, from the height to which the tide rises, a great head of water can be obtained in the reservoirs.

839. In the improvement of the mouths of rivers which empty into the sea through several channels, no obstruction should be placed to the free ingress of the tides through all the channels. If the main channel is subject to obstructions from deposits, dams should be built across the secondary channels, which may be so arranged with cuts through them, closed by gates, that the flood-tide will meet with no obstruction from the gates, while the ebb-tide, causing the gates to close, will be forced to recede through the main channel, which, in this way, will be daily scoured, and freed from deposits by the ebb current. The same object may be effected by building dams without inlets across the secondary channels, giving them such a height that at a certain stage of the flood-tide the water will flow over them and fill the channels above the dams. The portion of water thus dammed in will be forced through the main channel at the ebb.

840. When the bed is obstructed by rocks, it may be deepened by blasting the rocks, and removing the fragments with the assistance of the diving-bell and other machinery.

841. In some of our rivers, obstructions of a very dangerous character to boats are met with, in the trunks of large trees which are embedded in the bottom at one end, while the other is near the surface; they are termed *snags* and *sawyers*

by the boatmen. These obstructions have been very successfully removed, within late years, by means of machinery, and by propelling two heavy boats, moved by steam, which are connected by a strong beam across their bows, so that the beam will strike the snag, and either break it off near the bottom or uproot it. Other obstructions, termed *rafts*, formed by the accumulation of drift-wood at points of a river's course, are also found in some of our western rivers. These are also in process of removal, by cutting through them by various means which have been found successful.

842. Slack-water Navigation. When the general depth of water in a river is insufficient for the draught of boats of the most suitable size for the trade on it, an improvement, termed *slack-water* or *lock and dam navigation*, is resorted to. This consists in dividing the course into several suitable ponds, by forming dams to keep the water in the pond at a constant head; and by passing from one pond to another by locks at the ends of the dams.

843. The position of the dams, and the number requisite, will depend upon the locality. In streams subject to heavy freshets, it will generally be advisable to place the dams at the widest parts of the bed, to obtain the greatest outlet for the water over the dam. The dams may be built either in a straight line between the banks and perpendicular to the thread of the current, or they may be in a straight line oblique to the current, or their plan may be convex, the convex surface being up-stream, or it may be a broken line presenting an angle up-stream. The three last forms offer a greater outlet than the first to the water that flows over the dam, but are more liable to cause injury to the bed below the stream, from the oblique direction which the current may receive, arising from the form of the dam at top.

844. The cross section of a dam is usually trapezoidal, the face up-stream being inclined, and the one down-stream either vertical or inclined. When the down-stream face is vertical, the velocity of the water which flows over the dam is destroyed by the shock against the water of the pond below the dam, but whirls are formed which are more destructive to the bed than would be the action of the current upon it along the inclined face of a dam. In all cases the sides and bed of the stream, for some distance below the dam, should be protected from the action of the current by a facing of dry stone, timber, or any other construction of sufficient durability for the object in view.

845. The dams should receive a sufficient height only to

maintain the requisite depth of water in the ponds for the purposes of navigation. Any material at hand, offering sufficient durability against the action of the water, may be resorted to in their construction. Dams of alternate layers of brush and gravel, with a facing of plank, fascines, or dry stone, answer very well in gentle currents. If the dam is exposed to heavy freshets, to shocks of ice, and other heavy floating bodies, as drift-wood, it would be more prudent to form it of dry stone entirely, or of crib-work filled with stone; or, if the last material cannot be obtained, of a solid crib-work alone. If the dam is to be made water-tight, sand and gravel in sufficient quantity may be thrown in against it in the upper pond. The points where the dam joins the banks, which are termed the *roots* of the dam, require particular attention to prevent the water from filtering around them. The ordinary precaution for this is to build the dam some distance back into the banks.

846. The safest means of communication between the ponds is by an ordinary lock. It should be placed at one extremity of the dam, an excavation in the bank being made for it, to secure it from damage by floating bodies brought down by the current. The sides of the lock and a portion of the dam near it should be raised sufficiently high to prevent them from being overflowed by the heaviest freshets. When the height to which the freshets rise is great, the leaves of the head gates should be formed of two parts, as a single leaf would, from its size, be too unwieldy, the lower portion being of a suitable height for the ordinary manœuvres of the lock; the upper, being used only during the freshets, are so arranged that their bottom cross pieces shall rest, when the gates are closed, against the top of the lower portions. An arrangement somewhat similar to this may be made for the tail gates, when the lifts of the locks are great, to avoid the difficulty of manœuvring very high gates, by permanently closing the upper part of the entrance to the lock at the tail gates, either by a wall built between the side walls, or by a permanent framework, below which a sufficient height is left for the boats to pass.

847. A common, but unsafe method of passing from one pond to another, is that which is termed *flashing*; it consists of a sluice in the dam, which is opened and closed by means of a gate revolving on a vertical axis, which is so arranged that it can be manœuvred with ease. One plan for this purpose is to divide the gate into two unequal parts by an axis, and to place a valve of such dimensions in the greater, that

when opened the surface against which the water presses shall be less than that of the smaller part. The play of the gate is thus rendered very simple; when the valve is shut, the pressure of water on the larger surface closes it against the sides of the sluice; when the valve is opened, the gate swings round and takes a position in the direction of the current. Various other plans for flashing, on similar principles, are to be met with.

848. When the obstruction in a river cannot be overcome by any of the preceding means, as for example in those considerable descents in the bed known as rapids, where the water acquires a velocity so great that a boat can neither ascend nor descend with safety, resort must be had to a canal for the purpose of uniting its navigable parts above and below the obstruction.

The general direction of the canal will be parallel to the bed of the river. In some cases it may occupy a part of the bed by forming a dike in the bed parallel to the bank, and sufficiently far from it to give the requisite width to the canal. Whatever position the canal may occupy, every precaution should be taken to secure it from damage by freshets.

849. A lock will usually be necessary at each extremity of the canal where it joins the river. The positions for the extreme locks should be carefully chosen, so that the boats can at all times enter them with ease and safety. The locks should be secured by guard gates and other suitable means from freshets; and if they are liable to be obstructed by deposits, arrangements should be made for their removal either by a chase of water, or by machinery.

If the river should not present a sufficient depth of water at all seasons for entering the canal from it, a dam will be required at some point near the lock to obtain the depth requisite.

It may be advisable in some cases, instead of placing the extreme locks at the outlets of the canal to the river, to form a capacious basin at each extremity of the canal between the lock and river, where the boats can lie in safety. The outlets from the basins to the rivers may either be left open at all times, or else guard gates may be placed at them to shut off the water during freshets.

CHAPTER X.

SEACOAST IMPROVEMENTS.

850. THE following subdivisions may be made of the works belonging to this class of improvements: 1st. Artificial Roadsteads. 2d. The works required for natural and artificial Harbors. 3d. The works for the protection of the seacoast against the action of the sea.

851. Before adopting any definitive plan for the improvement of the seacoast at any point, the action of the tides, currents, and waves at that point must be ascertained.

852. The theory of tides is well understood; their rise and duration, caused by the attraction of the sun and moon, are also dependent on the strength and direction of the wind, and the conformation of the shore. Along our own seaboard, the highest tides vary greatly between the most southern and northern parts. At Eastport, Me., the highest tides, when not affected by the wind, vary between twenty-five and thirty feet above the ordinary low water. At Boston they rise from eleven to twelve feet above the same point, under similar circumstances; and from New York, following the line of the seaboard to Florida, they seldom rise above five feet.

853. Currents are principally caused by the tides, assisted, in some cases, by the wind. The theory of their action is simple. From the main current, which sweeps along the coast, secondary currents proceed into the *bays*, or indentations, in a line more or less direct, until they strike some point of the shore, from which they are deflected, and frequently separate into several others, the main branch following the general direction which it had when it struck the shore, and the others not unfrequently taking an opposite direction, forming what are termed *counter currents*, and, at points where the opposite currents meet, that rotary motion of the water known as *whirlpools*. The action of currents on the coast is to wear it away at those points against which they directly impinge, and to transport the *débris* to other points, thus forming, and sometimes removing, natural obstructions to navigation. These continual changes, caused by currents, make it extremely difficult to foresee their effects,

and to foretell the consequences which will arise from any change in the direction, or the intensity of a current, occasioned by artificial obstacles.

854. A good theory of waves, which shall satisfactorily explain all their phenomena, is still a desideratum in science. It is known that they are produced by winds acting on the surface of the sea; but how far this action extends below the surface and what are its effects at various depths, are questions that remain to be answered. The most commonly received theory is, that a wave is a simple oscillation of the water, in which each particle rises and falls, in a vertical line, a certain distance during each oscillation, without receiving any motion of translation in a horizontal direction. It has been objected to this theory that it fails to explain many phenomena observed in connection with waves.

In a recent French work on this subject, its author, Colonel Emy, an engineer of high standing, combats the received theory; and contends that the particles of water receive also a motion of translation horizontally, which, with that of ascension, causes the particles to assume an orbicular motion, each particle describing an orbit, which he supposes to be elliptical. He farther contends, that in this manner the particles at the surface communicate their motion to those just below them, and these again to the next, and so on downward, the intensity decreasing from the surface, without, however, becoming insensible at even very considerable depths; and that, in this way, owing to the reaction from the bottom, an immense volume of water is propelled along the bottom itself, with a motion of translation so powerful as to overthrow obstacles of the greatest strength if directly opposed to it. From this he argues that walls built to resist the shock of the waves should receive a very great batir at the base, and that this batir should be gradually decreased upward, until, towards the top, the wall should project over, thus presenting a concave surface at top to throw the water back. By adopting this form, he contends that the mass of water, which is rolled forward, as it were, on the bottom, when it strikes the face of the wall, will ascend along it, and thus gradually lose its momentum. These views of Colonel Emy have been attacked by other engineers, who have had opportunities to observe the same phenomena, on the ground that they are not supported by facts; and the question still remains undecided. It is certain, from experiments made by the author quoted upon walls of the form here described, that they seem to answer fully their intended purpose.

855. Roadsteads. The term *roadstead* is applied to an indentation of the coast, where vessels may ride securely at anchor under all circumstances of weather. If the indentation is covered by natural projections of the land, or *capess*, from the action of the winds and waves, it is said to be *land-locked*; in the contrary case, it is termed an *open* roadstead.

The anchorage of open roadsteads is often insecure, owing to violent winds setting into them from the sea, and occasioning high waves, which are very straining to the moorings. The remedy applied in this case is to place an obstruction near the entrance of the roadstead, to break the force of the waves from the sea. These obstructions, termed *breakwaters*, are artificial islands of greater or less extent, and of variable form, according to the nature of the case, made by throwing heavy blocks of stone into the sea, and allowing them to take their own bed.

The first great work of this kind undertaken in modern times, was the one at Cherbourg in France, to cover the roadstead in front of that town. After some trials to break the effects of the waves on the roadstead by placing large conical-shaped structures of timber filled with stones across it, which resulted in failure, as these vessels were completely destroyed by subsequent storms, the plan was adopted of forming a breakwater by throwing in loose blocks of stone, and allowing the mass to assume the form produced by the action of the waves upon its surface. The subsequent experience of many years, during which this work has been exposed to the most violent tempests, has shown that the action of the sea on the exposed surface is not very sensible at this locality at a depth of about 20 feet below the water level of the lowest tides, as the blocks of stone forming this part of the breakwater, some of which do not average over 40 lbs. in weight, have not been displaced from the slope the mass first assumed, which was somewhat less than one perpendicular to one base. From this point upwards, and particularly between the levels of high and low water, the action of the waves has been very powerful at times, during violent gales, displacing blocks of several tons weight, throwing them over the top of the breakwater upon the slope towards the shore. Wherever this part of the surface has been exposed the blocks of stone have been gradually worn down by the action of the waves, and the slope has become less and less steep, from year to year, until finally the surface assumed a slightly concave slope, which, at some points, was as great as ten base to one perpendicular.

The experience acquired at this work has conclusively shown that breakwaters, formed of the heaviest blocks of loose stone, are always liable to damage in heavy gales when the sea breaks over them, and that the only means of securing them is by covering the exposed surface with a facing of heavy blocks of hammered stone carefully set in hydraulic cement.

As the Cherbourg breakwater is intended also as a military construction, for the protection of the roadstead against an enemy's fleet, the cross section shown (in Fig. 248) has been adopted for it. Profiting by the experience of many years' observation, it was decided to construct the work that forms the cannon battery of solid masonry laid on a thick and broad bed of beton. The top surface of the breakwater is covered with heavy loose blocks of stone, and the foot of the wall on the face is protected by large blocks of artificial stone formed of beton. The top of the battery is about 12 feet above the highest water level.

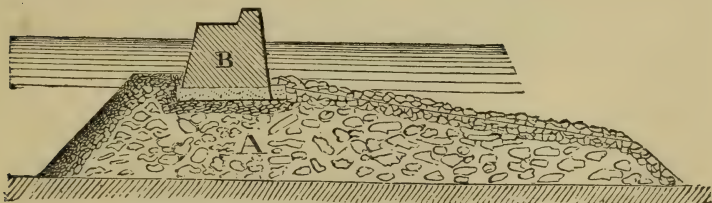


Fig. 248—Represents a section of the Cherbourg breakwater.
A, mass of stone.
B, battery of masonry.

The next work of the kind was built to cover the roadstead of Plymouth in England. Its cross section was, at first, made with an interior slope of one and a half base to one perpendicular, and an exterior slope of only three base to one perpendicular; but from the damage it sustained in the severe tempests in the winter of 1816-17, it is thought that its exterior slope was too abrupt.

A work of the same kind is still in process of construction on our coast, off the mouth of the Delaware. The same cross section has been adopted for it as in the one at Cherbourg.

All of these works were made in the same way, discharging the stone on the spot, from vessels, and allowing it to take its own bed, except for the facing, where, when practicable, the blocks were carefully laid, so as to present a uniform surface to the waves. The interior of the mass, in each

case, has been formed of stone in small blocks, and the facing of very large blocks. It is thought, however, that it would be more prudent to form the whole of large blocks, because, were the exterior to suffer damage, and experience shows that the heaviest blocks yet used have at times been displaced by the shock of the waves, the interior would still present a great obstacle.

From the foregoing details, respecting the cross sections of breakwaters, which from experiment have been found to answer, the proper form and dimensions of the cross section in similar cases may be arranged. As to the plan of such works, it must depend on the locality. The position of the breakwater should be chosen with regard to the direction of the heaviest swells from the sea into the roadstead,—the action of the current, and that of waves. The part of the roadstead which it covers should afford a proper depth of water, and secure anchorage for vessels of the largest class, during the most severe storms; and vessels should be able to double the breakwater under all circumstances of wind and tide. Such a position should, moreover, be chosen that there will be no liability to obstructions being formed within the roadstead, or at any of its outlets, from the change in the current which may be made by the breakwater.

856. The difficulty of obtaining very heavy blocks of stone, as well as their great cost, has led to the suggestion of substituting for them blocks of artificial stone, formed of concrete, which can be made of any shape and size desirable. This plan has been tried with success in several instances, particularly in a jetty or mole, at Algiers, constructed by the French government. The beton for a portion of this work was placed in large boxes, the sides of which were of wood, shaped at bottom to correspond to the irregularities of the bottom on which the beton was to be spread. The bottom of the box was made of strong canvas tarred. These boxes were first sunk in the position for which they were constructed, and then filled with the beton.

857. **Harbors.** The term *harbor* is applied to a secure anchorage of a more limited capacity than a roadstead, and therefore offering a safer refuge during boisterous weather. Harbors are either *natural* or *artificial*.

858. An artificial harbor is usually formed by enclosing a space on the coast between two arms, or dikes of stone, or of wood, termed *jetties*, which project into the sea from the shore, in such a way as to cover the harbor from the action of the wind and waves.

859. The plan of each jetty is curved, and the space enclosed by the two will depend on the number of vessels which it may be supposed will be in the harbor at the same time. The distance between the ends, or *heads*, of the jetties which forms the mouth of the harbor, will also depend on local circumstances; it should seldom be less than one hundred yards, and generally need not be more than five hundred. There are certain winds at every point of a coast which are more unfavorable than others to vessels entering and quitting the harbor, and to the tranquillity of its water. One of the jetties should, on this account, be longer than the other, and be so placed that it will both break the force of the heaviest swells from the sea into the mouth of the harbor, and facilitate the ingress and egress of vessels, by preventing them from being driven by the winds on the other jetty, just as they are entering or quitting the mouth.

860. The cross section and construction of a stone jetty differ in nothing from those of a breakwater, except that the jetty is usually wider on top, thirty feet being allowed, as it serves for a wharf in unloading vessels. The head of the jetty is usually made circular, and considerably broader than the other parts, as it, in some instances, receives a lighthouse, and a battery of cannon. It should be made with great care, of large blocks of stone, well united by iron or copper cramps, and the exterior courses should moreover be protected by fender beams of heavy timber to receive the shock of floating bodies.

861. Wooden jetties are formed of an open framework of heavy timber, the sides of which are covered on the interior by a strong sheeting of thick plank. Each rib of the frame (Fig. 249) consists of two inclined pieces, which form the sides—of an upright centre piece,—and of horizontal clamping pieces, which are notched and bolted in pairs on the inclined and upright pieces; the inclined pieces are farther strengthened by struts, which abut against them and the upright. The ribs are connected by large string-pieces, laid horizontally, which are notched and bolted on the inclined pieces, the uprights, and the clamping pieces, at their points of junction. The foundation, on which this framework rests, consists usually of three rows of large piles driven under the foot of the inclined pieces and the uprights. The rows of piles are firmly connected by cross and longitudinal beams notched and bolted on them; and they are, moreover, firmly united to the framework in a similar manner. The interior sheeting does not, in all cases, extend the entire length of

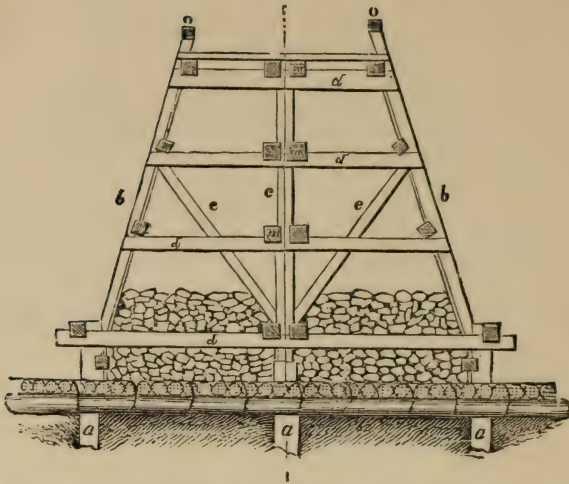


Fig. 249—Represents a cross section of a wooden jetty. *a*, foundation piles. *b*, inclined side pieces. *c*, middle upright. *d*, cross pieces bolted in pairs. *e*, struts. *m*, longitudinal pieces bolted in pairs. *o*, parapet.

the sides, but open spaces, termed *clear-ways*, are often left, to give a free passage and spread to the waves confined between the jetties, for the purpose of forming smooth water in the channel. If the jetties are covered at their back with earth, the clear-ways receive the form of inclined planes.

The foundation of the jetties requires particular care, especially when the channel between them is very narrow. Loose stone thrown around the piles is the ordinary construction used for this purpose; and, if it be deemed necessary, the bottom of the entire channel may be protected by an apron of brush and loose stone.

The top of the jetties is covered with a flooring of thick plank, which serves as a wharf. A strong hand-railing should be placed on each side of the flooring as a protection against accidents. The sides of jetties have been variously inclined; the more usual inclination varies between three and four perpendicular to one base.

862. Jetties are sometimes built out to form a passage to a natural harbor, which is either very much exposed, or subject to bars at its mouth. By narrowing the passage to the harbor between the jetties, great velocity is given to the current caused by the tide, and this alone will free the greater part of the channel from deposits. But at the head of the jetties a bar will, in almost every case, be found to accumulate, from the current alongshore, which is broken

by the jetties, and from the diminished velocity of the ebbing tides at this point. To remove these bars resort may be had, in localities where they are left nearly dry at low water, to reservoirs, and sluices, arranged with turning gates, like those adverted to for river improvements. The reservoirs are formed by excavating a large basin inshore, at some suitable point from which the collected water can be directed, with its full force, on the bar. The basin will be filled at flood-tide, and when the ebb commences the sluice gates will be kept closed until dead low water, when they should all be opened at once to give a strong water chase.

863. In harbors where vessels cannot be safely and conveniently moored alongside of the quays, large basins, termed *wet-docks*, are formed, in which the water can be kept at a constant level. A wet-dock may be made either by an in-shore excavation, or by enclosing a part of the harbor with strong water-tight walls; the first is the more usual plan. The entrance to the basin may be by a simple sluice, closed by ordinary lock gates, or by means of an ordinary lock. With the first method vessels can enter the basin only at high tide; by the last they may be entered or passed out at any period of the tide. The outlet of the lock should be provided with a pair of guard gates, to be shut against very high tides, or in cases of danger from storms.

864. The construction of the locks for basins differs in nothing, in principle, from that pursued in canal locks. The greatest care will necessarily be taken to form a strong mass free from all danger of accidents. The gates of a basin-lock are made convex towards the head of water, to give them more strength to resist the great pressure upon them. They are hung and manœuvred differently from ordinary lock gates; the quoin-post is attached to the side walls in the usual way: but at the foot of the mitre-post an iron or brass roller is attached, which runs on an iron roller way, and thus supports that end of the leaf, relieving the collar of the quoin-post from the strain that would be otherwise thrown on it, besides giving the leaf an easy play. Chains are attached to each mitre-post near the centre of pressure of the water, and the gate is opened, or closed, by means of windlasses to which the other ends of the chains are fastened.

865. The quays of wet-docks are usually built of masonry. Both brick and stone have been used; the facing at least should be of dressed stone. Large fender-beams may be attached to the face of the wall, to prevent it from being brought in contact with the sides of the vessels. The cross

section of quay-walls should be fixed on the same principles as that of other sustaining walls. It might be prudent to add buttresses to the back of the wall to strengthen it against the shocks of the vessels.

866. Quay-walls with us are ordinarily made either by forming a facing of heavy round or square piles driven in juxtaposition, which are connected by horizontal pieces, and secured from the pressure of the earth filled in behind them by land-ties; or, by placing the pieces horizontally upon each other, and securing them by iron bolts. Land-ties are used to counteract the pressure of the earth or rubbish which is thrown in behind them to form the surface of the quay. Another mode of construction, which is found to be strong and durable, is in use in our Eastern seaports. It consists in making a kind of crib-work of large blocks of granite, and filling in with earth and stone rubbish. The bottom course of the crib may be laid on the bed of the river, if it is firm and horizontal; in the contrary case a strong grillage, termed a *cradle*, must be made, and be sunk to receive the stone work. The top of the cradle should be horizontal, and the bottom should receive the same slope as that of the bed, in order that when the stones are laid they may settle horizontally.

867. **Dikes.** To protect the lowlands bordering the ocean from inundations, dikes, constructed of ordinary earth, and faced towards the sea with some material which will resist the action of the current, are usually resorted to.

The Dutch dikes, by means of which a large extent of country has been reclaimed and protected from the sea, are the most remarkable structures of this kind in existence. The cross section of those dikes is of a trapezoidal form, the width at top averaging from four to six feet, the interior slope being the same as the natural slope of the earth, and the exterior slope varying, according to circumstances, between three and twelve base to one perpendicular. The top of the dike, for perfect safety, should be about six feet above the level of the highest spring tides, although, in many places, they are only two or three above this level.

The earth for these dikes is taken from a ditch inshore, between which and the foot of the dike a space of about twenty feet is left which answers for a road. The exterior slope is variously faced, according to the means at hand, and the character of the current and waves at the point. In some cases, a strong straw thatch is put on, and firmly secured by pickets, or other means; in others, a layer of fascines is spread over the thatch, and is strongly picketed to it the ends of the pickets

being allowed to project out about eighteen inches, so that they can receive a wicker-work formed by interlacing them with twigs, the spaces between this wicker-work being filled with broken stone; this forms a very durable and strong facing, which resists not only the action of the current, but, by its elasticity, the shocks of the heaviest waves.

The foot of the exterior slope requires peculiar care for its protection; the shore, for this purpose, is in some places covered with a thick apron of brush and gravel in alternate layers, to a distance of one hundred yards into the water from the foot of the slope.

On some parts of the coast of France, where it has been found necessary to protect it from encroachments of the sea, a cross section has been given to the dikes towards the sea, of the same form as the one which the shore naturally takes from the action of the waves. The dikes in other respects are constructed and faced after the manner which has been so long in practice in Holland.

868. Groins. Constructions, termed *groins*, are used whenever it becomes necessary to check the effect of the current along the shore, and cause deposits to be formed. These are artificial ridges which rise a few feet only above the surface of the beach, and are built out in a direction either perpendicular to that of the shore, or oblique to it. They are constructed either of clay, which is well rammed and protected on the surface by a facing of fascines or stones; or of layers of fascines; or of one or two rows of short piles driven in juxtaposition; or any other means that the locality may furnish may be resorted to; the object being to interpose an obstacle, which, breaking the force of the current, will occasion a deposit near it, and thus gradually cause the shore to gain upon the sea.

869. Sea-walls. When the sea encroaches upon the land, forming a steep bluff, the face of which is gradually worn away, a wall of masonry is the only means that will afford a permanent protection against this action of the waves. Walls made for this object are termed *sea-walls*. The face of a sea-wall should be constructed of the most durable stone in large blocks. The backing may be of rubble or of beton. The whole work should be laid with hydraulic mortar.

JOHN WILEY & SON'S LIST OF PUBLICATIONS,

15 ASTOR PLACE,

Under the Mercantile Library and Trade Showrooms.

AGRICULTURE.

- DOWNING. FRUITS AND FRUIT-TREES OF AMERICA;** or the Culture, Propagation, and Management in the Garden and Orchard, of Fruit-trees generally, with descriptions of all the finest varieties of Fruit, Native and Foreign, cultivated in this country. By A. J. Downing. Second revision and correction, with large additions. By Chas. Downing. 1 vol. 8vo. over 1100 pages, with several hundred outline engravings. Price, with Supplement for 1872.....\$5 00
 "As a work of reference it has no equal in this country, and deserves a place in the Library of every Pomologist in America."—*Marshall P. Wilder.*
- " **ENCYCLOPEDIA OF FRUITS;** or, Fruits and Fruit-Trees of America. Part 1.—APPLES. With an Appendix containing many new varieties, and brought down to 1872. By Chas. Downing. With numerous outline engravings. 8vo, full cloth.....\$2 50
- " **ENCYCLOPEDIA OF FRUITS;** or, Fruits and Fruit-Trees of America. Part 2.—CHERRIES, GRAPES, PEACHES, PEARS, &c. With an Appendix containing many new varieties, and brought down to 1872. By Chas. Downing. With numerous outline engravings. 8vo, full cloth.....\$2 50
- " **FRUITS AND FRUIT-TREES OF AMERICA.** By A. J. Downing. First revised edition. By Chas. Downing. 12mo, cloth.....\$2 00
- " **SELECTED FRUITS.** From Downing's Fruits and Fruit-Trees of America. With some new varieties, including their Culture, Propagation, and Management in the Garden and Orchard, with a Guide to the selection of Fruits, with reference to the Time of Ripening. By Chas. Downing. Illustrated with upwards of four hundred outlines of Apples, Cherries, Grapes, Plums, Pears, &c. 1 vol., 12mo....\$2 50
- " **LOUDON'S GARDENING FOR LADIES, AND COMPANION TO THE FLOWER-GARDEN.** Second American from third London edition. Edited by A. J. Downing. 1 vol., 12mo.....\$2 00
- DOWNING & LINDLEY. THE THEORY OF HORTICULTURE.** By J. Lindley. With additions by A. J. Downing. 12mo, cloth.....\$2 00
- DOWNING. COTTAGE RESIDENCES.** A Series of Designs for Rural Cottages and Cottage Villas, with Garden Grounds. By A. J. Downing. Containing a revised List of Trees, Shrubs, and Plants, and the most recent and best selected Fruit, with some account of the newer style of Gardens. By Henry Winthrop Sargent and Charles Downing. With many new designs in Rural Architecture. By George E. Harney, Architect. 1 vol. 4to.....\$6 00

- DOWNING & WIGHTWICK.** **HINTS TO PERSONS ABOUT BUILDING IN THE COUNTRY.** By A. J. Downing. And **HINTS TO YOUNG ARCHITECTS**, calculated to facilitate their practical operations. By George Wightwick, Architect. Wood engravings. 8vo, cloth.....\$2 00
- KEMP.** **LANDSCAPE GARDENING**; or, How to Lay Out a Garden. Intended as a general guide in choosing, forming, or improving an estate (from a quarter of an acre to a hundred acres in extent), with reference to both design and execution. With numerous fine wood engravings. By Edward Kemp. 1 vol. 12mo, cloth.....\$2 50
- LIEBIG.** **CHEMISTRY IN ITS APPLICATION TO AGRICULTURE, &c.** By Justus Von Liebig. 12mo, cloth....\$1 00
- “ **LETTERS ON MODERN AGRICULTURE.** By Baron Von Liebig. Edited by John Blyth, M.D. With addenda by a practical Agriculturist, embracing valuable suggestions, adapted to the wants of American Farmers. 1 vol. 12mo, cloth.....\$1 00
- “ **PRINCIPLES OF AGRICULTURAL CHEMISTRY**, with special reference to the late researches made in England. By Justus Von Liebig. 1 vol. 12mo.....75 cents.
- PARSONS.** **HISTORY AND CULTURE OF THE ROSE.** By S. B. Parsons. 1 vol. 12mo.....\$1 25

ARCHITECTURE.

- DOWNING.** **COTTAGE RESIDENCES**; or, a Series of Designs for Rural Cottages and Cottage Villas and their Gardens and Grounds, adapted to North America. By A. J. Downing. Containing a revised List of Trees, Shrubs, Plants, and the most recent and best selected Fruits. With some account of the newer style of Gardens, by Henry Wentworth Sargent and Charles Downing. With many new designs in Rural Architecture by George E. Harney, Architect.....\$6 00
- DOWNING & WIGHTWICK.** **HINTS TO PERSONS ABOUT BUILDING IN THE COUNTRY.** By A. J. Downing. And **HINTS TO YOUNG ARCHITECTS**, calculated to facilitate their practical operations. By George Wightwick, Architect. With many wood-cuts. 8vo, cloth.....\$2 00
- HATFIELD.** **THE AMERICAN HOUSE CARPENTER.** A Treatise upon Architecture, Cornices, and Mouldings, Framing, Doors, Windows, and Stairs; together with the most important principles of Practical Geometry. New, thoroughly revised, and improved edition, with about 150 additional pages, and numerous additional plates. By R. G. Hatfield. 1 vol. 8vo.....\$3 50

NOTICES OF THE WORK.

- “The clearest and most thoroughly practical work on the subject.”
- “This work is a most excellent one, very comprehensive, and lucidly arranged.”
- “This work commends itself by its practical excellence.”
- “It is a valuable addition to the library of the architect, and almost indispensable to every scientific master-mechanic.”—*E. R. Journal.*

- HOLLY** **CARPENTERS' AND JOINERS' HAND-BOOK**, containing a Treatise on Framing, Roofs, etc., and useful Rules and Tables. By H. W. Holly. 1 vol. 18mo, cloth.....\$0 75
- “ **THE ART OF SAW-FILING SCIENTIFICALLY TREATED AND EXPLAINED.** With Directions for putting in order all kinds of Saws. By H. W. Holly. 18mo, cloth.....\$0 75
- RUSKIN** **SEVEN LAMPS OF ARCHITECTURE.** 1 vol. 12mo, cloth, plates.....\$1 75

- RUSKIN.** **LECTURES ON ARCHITECTURE AND PAINTING.**
1 vol. 12mo, cloth, plates.....\$1 50
- “ **LECTURE BEFORE SOCIETY OF ARCHITECTS.** 0 15
- WOOD.** **A TREATISE ON THE RESISTANCE OF MATERIALS,** and an Appendix on the Preservation of Timber. By De Volson Wood, Prof. of Engineering, University of Michigan. 1 vol. 8vo, cloth.....\$2 50
- This work is used as a Text-Book in Iowa University, Iowa Agricultural College, Illinois Industrial University, Sheffield Scientific School, New Haven, Cooper Institute, New York, Polytechnic College, Brooklyn, University of Michigan, and other institutions.
- “ **A TREATISE ON BRIDGES.** Designed as a Text-book and for Practical Use.. By De Volson Wood. 1 vol. 8vo, numerous illustrations,\$3 00

ASSAYING—ASTRONOMY.

- BODEMANN.** **A TREATISE ON THE ASSAYING OF LEAD, SILVER, COPPER, GOLD, AND MERCURY.** By Bodemann and Kerl. Translated by W. A. Goodyear. 1 vol. 12mo, cloth.....\$2 50
- MITCHELL.** **A MANUAL OF PRACTICAL ASSAYING.** By John Mitchell. Third edition, edited by William Crookes. 1 vol. thick 8vo, cloth.....\$10 00
- NORTON.** **A TREATISE ON ASTRONOMY, SPHERICAL AND PHYSICAL,** with Astronomical Problems and Solar, Lunar, and other Astronomical Tables for the use of Colleges and Scientific Schools. By William A. Norton. Fourth edition, revised, remodelled, and enlarged. Numerous plates. 8vo, cloth.....\$3 50

BIBLES, &c.

- BAGSTER.** **THE COMMENTARY WHOLLY BIBLICAL.** Contents:—The Commentary: an Exposition of the Old and New Testaments in the very words of Scripture. 2264 pp. II. An outline of the Geography and History of the Nations mentioned in Scripture. III. Tables of Measures, Weights, and Coins. IV. An Itinerary of the Children of Israel from Egypt to the Promised Land. V. A Chronological comparative Table of the Kings and Prophets of Israel and Judah. VI. A Chart of the World's History from Adam to the Third Century, A. D. VII. A complete Series of Illustrative Maps. IX. A Chronological Arrangement of the Old and New Testaments. X. An Index to Doctrines and Subjects, with numerous Selected Passages, quoted in full. XI. An Index to the Names of Persons mentioned in Scripture. XII. An Index to the Names of Places found in Scripture. XIII. The Names, Titles, and Characters of Jesus Christ our Lord, as revealed in the Scriptures, methodically arranged.
- 2 volumes 4to, cloth.....\$19 50
2 volumes 4to, half morocco, gilt edges..... 26 00
2 volumes 4to, morocco, gilt edges..... 35 00
3 volumes 4to, cloth..... 20 00
3 volumes 4to, half morocco, gilt edges..... 33 00
3 volumes 4to, morocco, gilt edges..... 40 00

- BLANK-PAGED BIBLE.** **THE HOLY SCRIPTURES OF THE OLD AND NEW TESTAMENTS;** with copious references to parallel and illustrative passages, and the alternate pages ruled for MS. notes.

This edition of the Scriptures contains the Authorized Version, illustrated by the references of "Bagster's Polyglot Bible," and enriched with accurate maps, useful tables, and an Index of Subjects.

- 1 vol. 8vo, half morocco.....\$8 50
1 vol. 8vo, morocco.....10 50

THE TREASURY BIBLE. Containing the authorized English version of the Holy Scriptures, interleaved with a Treasury of more than 500,000 Parallel Passages from Canne, Brown, Blayney, Scott, and others. With numerous illustrative notes.

1 vol., half bound.....\$7 50
1 vol., morocco..... 10 00

COMMON PRAYER, 48mo Size.

(Done in London expressly for us.)

COMMON PRAYER. No. 1. Gilt and red edges, imitation morocco.....\$0 62½
No. 2. Gilt and red edges, rims..... 87½
No. 3. Gilt and red edges, best morocco and calf..... 1 25
No. 4. Gilt and red edges, best morocco and calf, rims.. 1 50

BOOK-KEEPING.

JONES. **BOOKKEEPING AND ACCOUNTANTSHIP.** Elementary and Practical. In two parts, with a Key for Teachers. By Thomas Jones, Accountant and Teacher. 1 volume 8vo. cloth.....\$2 50
“ **BOOKKEEPING AND ACCOUNTANTSHIP.** School Edition. By Thomas Jones. 1 vol. 8vo, half roan.....\$1 50
“ **BOOKKEEPING AND ACCOUNTANTSHIP.** Set of Blanks. In 6 parts. By Thomas Jones.....\$1 50
“ **BOOKKEEPING AND ACCOUNTANTSHIP.** Double Entry; Results obtained from Single Entry; Equation of Payments, etc. By Thomas Jones. 1 vol. thin 8vo...\$0 75

CHEMISTRY.

CRAFTS. **A SHORT COURSE IN QUALITATIVE ANALYSIS;** with the new notation. By Prof. J. M. Crafts. Second edition. 1 vol. 12mo, cloth.....\$1 50
JOHNSON'S FRESenius. **A MANUAL OF QUALITATIVE CHEMICAL ANALYSIS.** By C. R. Fresenius. Edited by S. W. Johnson, Professor in Sheffield Scientific School, Yale College. With Chemical Notation and Nomenclature, old and new. 1 vol. 8vo, cloth.....\$4 50
“ **A SYSTEM OF INSTRUCTION IN QUANTITATIVE CHEMICAL ANALYSIS.** By C. R. Fresenius. From latest editions, edited, with additions, by Prof. S. W. Johnson. With Chemical Notation and Nomenclature, old and new.....\$6 00
KIRKWOOD **COLLECTION OF REPORTS (CONDENSED) AND OPINIONS OF CHEMISTS IN REGARD TO THE USE OF LEAD PIPE FOR SERVICE PIPE,** in the Distribution of Water for the Supply of Cities. By Jas. P. Kirkwood. 8vo, cloth.....\$1 50
MILLER. **ELEMENTS OF CHEMISTRY, THEORETICAL AND PRACTICAL.** By Wm. Allen Miller. 3 vols. 8vo.,\$18 00
“ Part I.—**CHEMICAL PHYSICS.** 1 vol. 8vo.....\$4 00
“ Part II.—**INORGANIC CHEMISTRY.** 1 vol. 8vo.... 6 00
“ Part III.—**ORGANIC CHEMISTRY.** 1 vol. 8vo..... 10 00
“ *“Dr. Miller's Chemistry is a work of which the author has every reason to feel proud. It is now by far the largest and most accurately written Treatise on Chemistry in the English language,” etc.—Dublin Med. Journal.*
“ **MAGNETISM AND ELECTRICITY.** By Wm. Allen Miller. 1 vol. 8vo.....\$2 50

- MUSPRATT. CHEMISTRY—THEORETICAL, PRACTICAL, AND ANALYTICAL**—as applied and relating to the Arts and Manufactures. By Dr. Sheridan Muspratt. 2 vols. 8vo, cloth, \$18.00; half russia. \$24 00
- NOAD. A MANUAL OF QUALITATIVE AND QUANTITATIVE CHEMICAL ANALYSIS.** For the use of Students. By H. M. Noad, author of "Manual of Electricity." 1 vol. 12mo. (London.) Complete. \$6 00
- " **QUANTITATIVE ANALYSIS.** 1 vol. cloth. 4 00
- PERKINS. AN ELEMENTARY MANUAL OF QUALITATIVE CHEMICAL ANALYSIS.** By Maurice Perkins. 12mo, cloth. \$1 00

DRAWING AND PAINTING.

- BOUVIER AND OTHERS. HANDBOOK ON OIL PAINTING.** Handbook of Young Artists and Amateurs in Oil Painting; being chiefly a condensed compilation from the celebrated Manual of Bouvier, with additional matter selected from the labors of Merriwell, De Montalbert, and other distinguished Continental writers on the art. In 7 parts. Adapted for a Text-Book in Academies of both sexes, as well as for self-instruction. Appended, a new Explanatory and Critical Vocabulary. By an American Artist. 12mo, cloth. \$2 00
- COE. PROGRESSIVE DRAWING BOOK.** By Benj. H. Coe. One vol., cloth. \$3 50
- " **DRAWING FOR LITTLE FOLKS; or, First Lessons for the Nursery.** 30 drawings. Neat cover. \$0 20
- " **FIRST STUDIES IN DRAWING.** Containing Elementary Exercises, Drawings from Objects, Animals, and Rustic Figures. Complete in *three numbers* of 18 studies each, in neat covers. Each. \$0.20
- " **COTTAGES.** An Introduction to Landscape Drawing. *Containing 72 Studies.* Complete in four numbers of 18 studies each, in neat covers. Each. \$0.20
- " **EASY LESSONS IN LANDSCAPE.** Complete in four numbers of 10 Studies each. In neat 8vo cover. Each, \$0 20
- " **HEADS, ANIMALS, AND FIGURES.** Adapted to Pencil Drawing. Complete in three numbers of 10 Studies each. In neat 8vo covers. Each. \$0 20
- " **COPY BOOK, WITH INSTRUCTIONS.** \$0 37½
- RUSKIN. THE ELEMENTS OF DRAWING.** In Three Letters to Beginners. By John Ruskin. 1 vol. 12mo. \$1 00
- " **THE ELEMENTS OF PERSPECTIVE.** Arranged for the use of Schools. By John Ruskin. \$1 00
- SMITH. A MANUAL OF TOPOGRAPHICAL DRAWING.** By Prof. R. S. Smith. Second edition. 1 vol. 8vo, cloth, plates. \$2 00
- " **MANUAL OF LINEAR PERSPECTIVE.** Form, Shade, Shadow, and Reflection. By Prof. R. S. Smith. 1 vol. 8vo, plates, cloth. \$2 00
- WARREN. CONSTRUCTIVE GEOMETRY AND INDUSTRIAL DRAWING.** By S. Edward Warren, Professor in the Massachusetts Institute of Technology, Boston:—
- I. ELEMENTARY WORKS.**
1. **ELEMENTARY FREE-HAND GEOMETRICAL DRAWING.** A series of progressive exercises on regular lines and forms, including systematic instruction in lettering; a training of the eye and hand for all who are learning to draw. 12mo, cloth, many cuts. 75 cts.
Vols. 1 and 3, bound in 1 vol. \$1 75

ELEMENTARY WORKS.—Continued.

WARREN

2. PLANE PROBLEMS IN ELEMENTARY GEOMETRY. With numerous wood-cuts. 12mo, cloth.....\$1 25
3. DRAFTING INSTRUMENTS AND OPERATIONS. Containing full information about all the instruments and materials used by the draftsmen, with full directions for their use. With plates and wood-cuts. One vol. 12mo, cloth, \$1 25
4. ELEMENTARY PROJECTION DRAWING. Revised and enlarged edition. In five divisions. This and the last volume are favorite text-books, especially valuable to all Mechanical Artisans, and are particularly recommended for the use of all higher public and private schools. New revised and enlarged edition, with numerous wood-cuts and plates. (1872.) 12mo, cloth.....\$1 50
5. ELEMENTARY LINEAR PERSPECTIVE OF FORMS AND SHADOWS. Part I.—Primitive Methods, with an Introduction. Part II.—Derivative Methods, with Notes on Aerial Perspective, and many Practical Examples. Numerous wood-cuts. 1 vol. 12mo, cloth.....\$1 00

II. HIGHER WORKS.

These are designed principally for Schools of Engineering and Architecture, and for the members generally of those professions; and the first three are also designed for use in those colleges which provide courses of study adapted to the preliminary general training of candidates for the scientific professions, as well as for those technical schools which undertake that training themselves.

1. GENERAL PROBLEMS OF ORTHOGRAPHIC PROJECTIONS. The foundation course for the subsequent theoretical and practical works. A new edition of this work will soon appear.
2. GENERAL PROBLEMS OF SHADES AND SHADOWS. A wider range of problems than can elsewhere be found in English, and the principles of shading. 1 vol. 8vo, with numerous plates. Cloth.....\$3 50
3. HIGHER LINEAR PERSPECTIVE. Distinguished by its concise summary of various methods of perspective construction; a full set of standard problems, and a careful discussion of special higher ones. With numerous large plates. 8vo, cloth.....\$4 00
4. ELEMENTS OF MACHINE CONSTRUCTION AND DRAWING; or, Machine Drawings. With some elements of descriptive and rational cinematics. A Text-Book for Schools of Civil and Mechanical Engineering, and for the use of Mechanical Establishments, Artisans, and Inventors. Containing the principles of gearings, screw propellers, valve motions, and governors, and many standard and novel examples, mostly from present American practice. By S. Edward Warren. 2 vols. 8vo. 1 vol. text and cuts, and 1 vol. large plates...\$7 50

A FEW FROM MANY TESTIMONIALS.

- "It seems to me that your Works only need a thorough examination to be introduced and permanently used in all the Scientific and Engineering Schools."
—Prof. J. G. FOX, *Collegiate and Engineering Institute, New York City.*
- "I have used several of your Elementary Works, and believe them to be better adapted to the purposes of instruction than any others with which I am acquainted."
—H. F. WALLING, *Prof. of Civil and Topographical Engineering, Lafayette College, Easton, Pa.*
- "Your Works appear to me to fill a very important gap in the literature of the subjects treated. Any effort to draw Artisans, etc., away from the 'rule of thumb,' and give them an insight into principles, is in the right direction, and meets my heartiest approval. This is the distinguishing feature of your Elementary Works."
—Prof. H. L. EUSTIS, *Lawrence Scientific School, Cambridge, Mass.*
- "The author has happily divided the subjects into two great portions: the former embracing those processes and problems proper to be taught to all students in Institutions of Elementary Instruction; the latter, those suited to advanced students preparing for technical purposes. The Elementary Books ought to be used in all High Schools and Academies; the Higher ones in Schools of Technology."
—Wm. W. FOLWELL, *President of University of Minnesota.*

DYEING, &c.

MACFARLANE. A PRACTICAL TREATISE ON DYEING AND CALICO-PRINTING. Including the latest Inventions and Improvements. With an Appendix, comprising definitions of chemical terms, with tables of Weights, Measures, &c. By an experienced Dyer. With a supplement, containing the most recent discoveries in color chemistry. By Robert Macfarlane. 1 vol. 8vo. \$5 00

REIMANN. A TREATISE ON THE MANUFACTURE OF ANILINE AND ANILINE COLORS. By M. Reimann. To which is added the Report on the Coloring Matters derived from Coal Tar, as shown at the French Exhibition, 1867. By Dr. Hofmann. Edited by Wm. Crookes. 1 vol. 8vo, cloth, \$2 50

"Dr. Reimann's portion of the Treatise, written in concise language, is profoundly practical, giving the minutest details of the processes for obtaining all the more important colors, with woodcuts of apparatus. Taken in conjunction with Hofmann's Report, we have now a complete history of Coal Tar Dyes, both theoretical and practical."—*Chemist and Druggist*.

ENGINEERING.

AUSTIN. A PRACTICAL TREATISE ON THE PREPARATION, COMBINATION, AND APPLICATION OF CALCEAREOUS AND HYDRAULIC LIMES AND CEMENTS. To which is added many useful recipes for various scientific, mercantile, and domestic purposes. By James G. Austin. 1 vol. 12mo. \$2 00

COLBURN LOCOMOTIVE ENGINEERING AND THE MECHANISM OF RAILWAYS. A Treatise on the Principles and Construction of the Locomotive Engine, Railway Carriages, and Railway Plant, with examples. Illustrated by Sixty-four large engravings and two hundred and forty woodcuts. BY Zerah Colburn. Complete, 20 parts, \$15.00; or 2 vols. cloth. \$16 00
Or, half morocco, gilt top. \$20 00

KNIGHT. THE MECHANICIAN AND CONSTRUCTOR FOR ENGINEERS. Comprising Forging, Planing, Lining, Slotting, Shaping, Turning, Screw-cutting, &c. Illustrated with ninety-six plates. By Cameron Knight. 1 vol. 4to, half morocco. \$15 00

MAHAN. AN ELEMENTARY COURSE OF CIVIL ENGINEERING, for the use of the Cadets of the U. S. Military Academy. By D. H. Mahan. 1 vol. 8vo, with numerous woodcuts. New edition. Edited by Prof. De Volson Wood. Full cloth. \$5 00

" **DESCRIPTIVE GEOMETRY,** as applied to the Drawing of Fortifications and Stone-Cutting. For the use of the Cadets of the U. S. Military Academy. By Prof. D. H. Mahan. 1 vol. 8vo. Plates. \$1 50

" **INDUSTRIAL DRAWING.** Comprising the Description and Uses of Drawing Instruments, the Construction of Plane Figures, the Projections and Sections of Geometrical Solids, Architectural Elements, Mechanism, and Topographical Drawing. With remarks on the method of Teaching the subject. For the use of Academies and Common Schools. By Prof. D. H. Mahan. 1 vol. 8vo. Twenty steel plates. Full cloth. \$3 00

" **A TREATISE ON FIELD FORTIFICATIONS.** Containing instructions on the Methods of Laying Out, Constructing, Defending, and Attacking Entrenchments. With the General Outlines, also, of the Arrangement, the Attack, and Defence of Permanent Fortifications. By Prof. D. H. Mahan. New edition, revised and enlarged. 1 vol. 8vo, full cloth, with plates. \$3 50

" **ELEMENTS OF PERMANENT FORTIFICATIONS.** By Prof. D. H. Mahan. 1 vol. 8vo, with numerous large plates. Cloth. \$6 50

- MAHAN.** **ADVANCED GUARD, OUT-POST** and Detachment Service of Troops, with the Essential Principles of Strategy and Grand Tactics. For the use of Officers of the Militia and Volunteers. By Prof. D. H. Mahan. New edition, with large additions and 12 plates. 1 vol. 18mo, cloth. . . . \$1 50
- MAHAN & MOSELY.** **MECHANICAL PRINCIPLES OF ENGINEERING AND ARCHITECTURE.** By Henry Mosely, M.A., F.R.S. From last London edition, with considerable additions, by Prof. D. H. Mahan, LL.D., of the U. S. Military Academy. 1 vol. 8vo, 700 pages. With numerous cuts. Cloth. . . \$5 00
- MAHAN & BRESSE.** **HYDRAULIC MOTORS.** Translated from the French Cours de Mecanique, appliqué par M. Bresse. By Lieut. F. A. Mahan, and revised by Prof. D. H. Mahan. 1 vol. 8vo, plates. \$2 50
- WOOD.** **A TREATISE ON THE RESISTANCE OF MATERIALS,** and an Appendix on the Preservation of Timber. By De Volson Wood, Professor of Engineering, University of Michigan. 1 vol. 8vo, cloth. \$2 50
- A TREATISE ON BRIDGES.** Designed as a Text-book and for Practical Use. By De Volson Wood. 1 vol. 8vo, numerous illustrations, cloth. \$3 00
- GREEK.**
- BAGSTER.** **GREEK TESTAMENT, ETC.** The Critical Greek and English New Testament in Parallel Columns, consisting of the Greek Text of Scholz, readings of Griesbach, etc., etc. 1 vol. 18mo, half morocco. \$3 00
- “ — do. Full morocco, gilt edges. 4 50
- “ — With Lexicon, by T. S. Green. Half-bound. 4 50
- “ — do. Full morocco, gilt edges. 6 00
- “ — do. With Concordance and Lexicon. Half mor., 6 00
- “ — do. Limp morocco. 7 50
- “ **THE ANALYTICAL GREEK LEXICON TO THE NEW TESTAMENT.** In which, by an alphabetical arrangement, is found every word in the Greek text *in every form in which it appears*—that is to say, every occurrent person, number, tense or mood of verbs, every case and number of nouns, pronouns, &c., is placed in its alphabetical order, fully explained by a careful grammatical analysis and referred to its root, so that no uncertainty as to the grammatical structure of any word can perplex the beginner, but, assured of the precise grammatical force of any word he may desire to interpret, he is able immediately to apply his knowledge of the English meaning of the root with accuracy and satisfaction. 1 vol. small 4to, half bound. \$6 50
- “ **GREEK-ENGLISH LEXICON TO TESTAMENT.** By T. S. Green. Half morocco \$1 50
- HEBREW.**
- GREEN.** **A GRAMMAR OF THE HEBREW LANGUAGE.** With copious Appendixes. By W. H. Green, D.D., Professor in Princeton Theological Seminary. 1 vol. 8vo, cloth. . . \$3 50
- “ **AN ELEMENTARY HEBREW GRAMMAR.** With Tables, Reading Exercises, and Vocabulary. By Prof. W. H. Green, D.D. 1 vol. 12mo, cloth. \$1 50
- “ **HEBREW CHRESTOMATHY; or, Lessons in Reading and Writing Hebrew.** By Prof. W. H. Green, D.D. 1 vol. 8vo, cloth. \$2 00
- LETTERIS.** **A NEW AND BEAUTIFUL EDITION OF THE HEBREW BIBLE.** Revised and carefully examined by Myer Levi Letteris. 1 vol. 8vo, with key, marble edges. . . . \$2 50
- “ This edition has a large and much more legible type than the known one volume editions, and the print is excellent, while the name of LETTERIS is a sufficient guarantee for correctness.” —*Rev. Dr. J. M. WISE, Editor of the ISRAELITE.*

- BACSTER'S GESENIUS. BAGSTER'S COMPLETE EDITION OF GESENIUS' HEBREW AND CHALDEE LEXICON.** In large, clear, and perfect type. Translated and edited with additions and corrections, by S. P. Tregelles, LL.D.
In this edition great care has been taken to guard the student from Neologian tendencies by suitable remarks whenever needed.
"The careful revision to which the Lexicon has been subjected by a faithful and Orthodox translator exceedingly enhances the practical value of this edition."
—*Edinburgh Ecclesiastical Journal*.
Small 4to, half bound.....\$7 50
- BACSTER'S NEW POCKET HEBREW AND ENGLISH LEXICON.**
The arrangement of this Manual Lexicon combines two things—the etymological order of roots and the alphabetical order of words. This arrangement tends to lead the learner onward; for, as he becomes more at home with roots and derivatives, he learns to turn at once to the root, without first searching for the particular word in its alphabetic order. 1 vol. 18mo, cloth.....\$2 00
"This is the most beautiful, and at the same time the most correct and perfect Manual Hebrew Lexicon we have ever used."—*Eclectic Review*.
- IRON, METALLURGY, &c.**
- BODEMANN. A TREATISE ON THE ASSAYING OF LEAD, SILVER, COPPER, GOLD, AND MERCURY.** By Bodemann & Kerl. Translated by W. A. Goodyear. 1 vol. 12mo, \$2 50
- CROOKES. A PRACTICAL TREATISE ON METALLURGY.** Adapted from the last German edition of Prof. Kerl's Metallurgy. By William Crookes and Ernst Rohrig. In three vols. thick 8vo. Price.....\$30 00
Separately. Vol. 1. Lead, Silver, Zinc, Cadmium, Tin, Mercury, Bismuth, Antimony, Nickel, Arsenic, Gold, Platinum, and Sulphur.....\$10 00
Vol. 2. Copper and Iron..... 10 00
Vol. 3. Steel, Fuel, and Supplement..... 10 00
- FAIRBAIRN. CAST AND WROUGHT IRON FOR BUILDING.** By Wm. Fairbairn. 8vo, cloth.....\$2 00
- FRENCH. HISTORY OF IRON TRADE, FROM 1621 TO 1857.** By B. F. French. 8vo, cloth.....\$2 00
- KIRKWOOD. COLLECTION OF REPORTS (CONDENSED) AND OPINIONS OF CHEMISTS IN REGARD TO THE USE OF LEAD PIPE FOR SERVICE PIPE, in the Distribution of Water for the Supply of Cities.** By I. P. Kirkwood, C.E. 8vo, cloth.....\$1 50
- LESLEY. THE IRON MANUFACTURER'S GUIDE TO THE FURNACES, FORGES, AND ROLLING-MILLS OF THE UNITED STATES.** By J. P. Lesley. With maps and plates. 1 vol. 8vo, cloth.....\$8 00
- MACHINISTS—MECHANICS.**
- FITZGERALD. THE BOSTON MACHINIST.** A complete School for the Apprentice and Advanced Machinist. By W. Fitzgerald. 1 vol. 18mo, cloth.....\$0 75
- HOLLY. SAW FILING.** The Art of Saw Filing Scientifically Treated and Explained. With Directions for putting in order all kinds of Saws, from a Jeweller's Saw to a Steam Saw-mill. Illustrated by forty-four engravings. Third edition. By H. W. Holly. 1 vol. 18mo, cloth.....\$0 75
- KNIGHT. THE MECHANISM AND ENGINEER INSTRUCTOR.** Comprising Forging, Planing, Lining, Slotting, Shaping, Turning, Screw-Cutting, etc., etc. By Cameron Knight. 1 vol. 4to, half morocco.....\$15 00

- TURNING, &c. LATHE, THE, AND ITS USES, ETC.;** or, *Instruction in the Art of Turning Wood and Metal.* Including a description of the most modern appliances for the ornamentation of plane and curved surfaces, with a description also of an entirely novel form of *Lathe* for Eccentric and Rose Engine Turning, a *Lathe* and Turning Machine combined, and other valuable matter relating to the Art. 1 vol. 8vo, copiously illustrated. Including Supplement. 8vo, cloth. . . . \$7 00
- "The most complete work on the subject ever published."—*American Artisan.*
 "Here is an invaluable book to the practical workman and amateur."—*London Weekly Times.*
- TURNING, &c. SUPPLEMENT AND INDEX TO LATHE AND ITS USES.** Large type. Paper. 8vo. . . . \$0 90
- WILLIS. PRINCIPLES OF MECHANISM.** Designed for the use of Students in the Universities and for Engineering Students generally. By Robert Willis, M.D., F.R.S., President of the British Association for the Advancement of Science, &c., &c. Second edition, enlarged. 1 vol. 8vo, cloth. . . . \$7 50
- * * It ought to be in every large Machine Workshop Office, in every School of Mechanical Engineering at least, and in the hands of every Professor of Mechanics, &c.—Prof. S. EDWARD WARREN.
- MANUFACTURES.**
- BOOTH. NEW AND COMPLETE CLOCK AND WATCH MAKERS' MANUAL.** Comprising descriptions of the various gearings, escapements, and Compensations now in use in French, Swiss, and English clocks and watches, Patents, Tools, etc., with directions for cleaning and repairing. With numerous engravings. Compiled from the French, with an Appendix containing a History of Clock and Watch Making in America. By Mary L. Booth. With numerous plates. 1 vol. 12mo, cloth. . . . \$2 00
- GELDARD. HANDBOOK ON COTTON MANUFACTURE;** or, *A Guide to Machine-Building, Spinning, and Weaving.* With practical examples, all needful calculations, and many useful and important tables. The whole intended to be a complete yet compact authority for the manufacture of cotton. By James Geldard. With steel engravings. 1 vol. 12mo, cloth. . . . \$2 50
- MEDICAL, &c.**
- BULL. HINTS TO MOTHERS FOR THE MANAGEMENT OF HEALTH DURING THE PERIOD OF PREGNANCY, AND IN THE LYING-IN ROOM.** With an exposure of popular errors in connection with those subjects. By Thomas Bull, M.D. 1 vol. 12mo, cloth. . . . \$1 00
- FRANCKE. OUTLINES OF A NEW THEORY OF DISEASE,** applied to Hydropathy, showing that water is the only true remedy. With observations on the errors committed in the practice of Hydropathy, notes on the cure of cholera by cold water, and a critique on Priessnitz's mode of treatment. Intended for popular use. By the late H. Francke. Translated from the German by Robert Blakie, M.D. 1 vol. 12mo, cloth. . . \$1 50
- GREEN. A TREATISE ON DISEASES OF THE AIR PASSAGES.** Comprising an inquiry into the History, Pathology, Causes, and Treatment of those Affections of the Throat called Bronchitis, Chronic Laryngitis, Clergyman's Sore Throat, etc., etc. By Horace Green, M.D. Fourth edition, revised and enlarged. 1 vol. 8vo, cloth. . . . \$3 00
- " **A PRACTICAL TREATISE ON PULMONARY TUBERCULOSIS,** embracing its History, Pathology, and Treatment. By Horace Green, M.D. Colored plates. 1 vol. 8vo, cloth. . . . \$5 00

- GREEN.** **OBSERVATIONS ON THE PATHOLOGY OF CROUP**
With Remarks on its Treatment by Topical Medications. By
Horace Green, M.D. 1 vol. 8vo, cloth.....\$1 25
- “ **ON THE SURGICAL TREATMENT OF POLYPI OF
THE LARYNX, AND OEDEMA OF THE GLOTTIS.**
By Horace Green, M.D. 1 vol. 8vo.....\$1 25
- “ **FAVORITE PRESCRIPTIONS OF LIVING PRACTI-
TIONERS.** With a Toxicological Table, exhibiting the
Symptoms of Poisoning, the Antidotes for each Poison, and
the Test proper for their detection. By Horace Green. 1
vol. 8vo, cloth.....\$2 50
- TILT.** **ON THE PRESERVATION OF THE HEALTH OF
WOMEN AT THE CRITICAL PERIODS OF LIFE.**
By E. G. Tilt, M.D. 1 vol. 18mo, cloth.....\$0 50
- VON DUBEN.** **GUSTAF VON DUBEN'S TREATISE ON MICRO-
SCOPICAL DIAGNOSIS.** With 71 engravings. Trans-
lated, with additions, by Prof. Louis Bauer, M.D. 1 vol. 8vo,
cloth.....\$1 00
- MINERALOGY.**
- BRUSH.** **ON BLOW-PIPE ANALYSIS.** By Prof. Geo. J. Brush. (In
preparation.)
- DANA.** **DESCRIPTIVE MINERALOGY.** Comprising the most re-
cent Discoveries. Fifth edition. Almost entirely re-written
and greatly enlarged. Containing nearly 900 pages 8vo, and
upwards of 600 wood engravings. By Prof. J. Dana.
Cloth.....\$10 00
- “We have used a good many works on Mineralogy, but have met with none that
begin to compare with this in fulness of plan, detail, and execution.”—
American Journal of Mining.
- DANA & BRUSH.** **APPENDIX TO DANA'S MINERALOGY,** bringing the
work down to 1872. By Prof. G. J. Brush. 8vo.....\$0 50
- DANA.** **DETERMINATIVE MINERALOGY.** 1 vol. (In prepa-
ration.)
- “ **A TEXT-BOOK OF MINERALOGY.** 1 vol. (In prepa-
ration.)
- MISCELLANEOUS.**
- BAILEY.** **THE NEW TALE OF A TUB.** An adventure in verse. By
F. W. N. Bailey. With illustrations. 1 vol. 8vo.....\$0 75
- CARLYLE.** **ON HEROES, HERO-WORSHIP, AND THE HEROIC IN
HISTORY.** Six Lectures. Reported, with emendations and
additions. By Thomas Carlyle. 1 vol. 12mo, cloth...\$0 75
- CATLIN.** **THE BREATH OF LIFE; or, Mal-Respiration and its
Effects upon the Enjoyments and Life of Man.** By Geo.
Catlin. With numerous wood engravings. 1 vol. 8vo, \$0 75
- CHEEVER.** **CAPITAL PUNISHMENT.** A Defence of. By Rev. George
B. Cheever, D.D. Cloth.....\$0 50
- “ **HILL DIFFICULTY,** and other Miscellanies. By Rev.
George B. Cheever, D.D. 1 vol. 12mo, cloth.....\$1 00
- “ **JOURNAL OF THE PILGRIMS AT PLYMOUTH ROCK.**
By Geo. B. Cheever, D.D. 1 vol. 12mo, cloth.....\$1 00
- “ **WANDERINGS OF A PILGRIM IN THE ALPS.** By
George B. Cheever, D.D. 1 vol. 12mo, cloth.....\$1 00
- “ **WANDERINGS OF THE RIVER OF THE WATER OF
LIFE.** By Rev. Dr. George B. Cheever. 1 vol. 12mo,
cloth.....\$1 00
- CONYBEARE.** **ON INFIDELITY.** 12mo, cloth.....1 00
- CHILD'S BOOK** **OF FAVORITE STORIES.** Large colored plates. 4to,
cloth.....\$1 50

- EDWARDS.** **FREE TOWN LIBRARIES.** The Formation, Management and History in Britain, France, Germany, and America. Together with brief notices of book-collectors, and of the respective places of deposit of their surviving collections. By Edward Edwards. 1 vol. thick 8vo.....\$4 00
- GREEN.** **THE PENTATEUCH VINDICATED FROM THE ASSURPTIONS OF BISHOP COLENSO.** By Wm. Henry Green, Prof. Theological Seminary, Princeton, N. J. 1 vol. 12mo, cloth.....\$1 25
- COURAUD.** **PHRENO-MNEMOTECHNY; or, The Art of Memory.** The series of Lectures explanatory of the principles of the system. By Francis Fauvel-Gouraud. 1 vol. 8vo, cloth, \$2 00
- “ **PHRENO-MNEMOTECHNIC DICTIONARY.** Being a Philosophical Classification of all the Homophonic Words of the English Language. To be used in the application of the Phreno-Mnemotechnic Principles. By Francis Fauvel-Gouraud. 1 vol. 8vo, cloth.....\$2 00
- HEIGHWAY.** **LEILA ADA.** 12mo, cloth..... 1 00
- “ **LEILA ADA'S RELATIVES.** 12mo, cloth..... 1 00
- KELLY.** **CATALOGUE OF AMERICAN BOOKS.** The American Catalogue of Books, from January, 1861, to January, 1866. Compiled by James Kelly. 1 vol. 8vo, net cash.....\$5 00
- “ **CATALOGUE OF AMERICAN BOOKS.** The American Catalogue of Books from January, 1866, to January, 1871. Compiled by James Kelly. 1 vol. 8vo, net.....\$7 50
- MAVER'S** **COLLECTION OF GENUINE SCOTTISH MELODIES.** For the Piano-Forte or Harmonium, in keys suitable for the voice. Harmonized by C. H. Morine. Edited by Geo. Alexander. 1 vol. 4to, half calf.....\$10 00
- NOTLEY.** **A COMPARATIVE GRAMMAR OF THE FRENCH, ITALIAN, SPANISH, AND PORTUGUESE LANGUAGES.** By Edwin A. Notley. 1 vol., cloth.....\$5 00
- PARKER.** **POLAR MAGNETISM.** First and Second Lectures. By John A. Parker. Each.....\$0 25
- “ **NON-EXISTENCE OF PROJECTILE FORCES IN NATURE.** By John A. Parker.....\$0 25
- STORY OF** **A POCKET BIBLE.** Illustrated. 12mo, cloth.....\$1 00
- TUPPER** **PROVERBIAL PHILOSOPHY.** 12mo..... 1 00
- WALTON & COTTON.** **THE COMPLETE ANGLER; or, The Contemplative Man's Recreation,** by Isaac Walton, and Instructions how to Angle for a Trout or Grayling in a Clear Stream, by Charles Cotton, with copious notes, for the most part original. A bibliographical preface, giving an account of fishing and Fishing Books, from the earliest antiquity to the time of Walton, and a notice of Cotton and his writings, by Rev. Dr. Bethune. To which is added an appendix, including the most complete catalogue of books in angling ever printed, &c. Also a general index to the whole work. 1 vol. 12mo, cloth.....\$3 00
- WARREN.** **NOTES ON POLYTECHNIC OR SCIENTIFIC SCHOOLS IN THE UNITED STATES.** Their Nature, Position, Aims, and Wants. By S. Edward Warren. Paper...\$0 40
- WILLIAMS.** **THE MIDDLE KINGDOM.** A Survey of the Geography, Government, Education, Social Life, Arts, Religion, &c., of the Chinese Empire and its Inhabitants. With a new map of the Empire. By S. Wells Williams. Fourth edition, in 2 vols.....\$4 00

RUSKIN'S WORKS.

Uniform in size and style.

- RUSKIN. **MODERN PAINTERS.** 5 vols. tinted paper, bevelled boards, plates, in box.....\$18 00
- “ **MODERN PAINTERS.** 5 vols. half calf..... 27 00
- “ “ “ “ without plates..... 12 00
- “ “ “ “ half calf, 20 00
- Vol. 1.—Part 1. General Principles. Part 2. Truth.
- Vol. 2.—Part 3. Of Ideas of Beauty.
- Vol. 3.—Part 4. Of Many Things.
- Vol. 4.—Part 5. Of Mountain Beauty.
- Vol. 5.—Part 6. Leaf Beauty. Part 7. Of Cloud Beauty. Part 8. Ideas of Relation of Invention, Formal. Part 9. Ideas of Relation of Invention, Spiritual.
- “ **STONES OF VENICE.** 3 vols., on tinted paper, bevelled boards, in box.....\$7 00
- “ **STONES OF VENICE.** 3 vols., on tinted paper, half calf.....\$12 00
- “ **STONES OF VENICE.** 3 vols., cloth..... 6 00
- Vol. 1.—The Foundations.
- Vol. 2.—The Sea Stories.
- Vol. 3.—The Fall.
- “ **SEVEN LAMPS OF ARCHITECTURE.** With illustrations, drawn and etched by the authors. 1 vol. 12mo, cloth, \$1 75
- “ **LECTURES ON ARCHITECTURE AND PAINTING.** With illustrations drawn by the author. 1 vol. 12mo, cloth.....\$1 50
- “ **THE TWO PATHS.** Being Lectures on Art, and its Application to Decoration and Manufacture. With plates and cuts. 1 vol. 12mo, cloth.....\$1 25
- “ **THE ELEMENTS OF DRAWING.** In Three Letters to Beginners. With illustrations drawn by the author. 1 vol. 12mo, cloth.....\$1 00
- “ **THE ELEMENTS OF PERSPECTIVE.** Arranged for the use of Schools. 1 vol. 12mo, cloth.....\$1 00
- “ **THE POLITICAL ECONOMY OF ART.** 1 vol. 12mo, cloth.....\$1 00
- “ **PRE-RAPHAELITISM.**
- “ **NOTES ON THE CONSTRUCTION OF SHEEPFOLDS.** } 1 vol. 12mo, cloth, \$1 00
- “ **KING OF THE GOLDEN RIVER; or, The Black Brothers.** A Legend of Stiria. }
- RUSKIN. **SESAME AND LILIES.** Three Lectures on Books, Women, &c. 1. Of Kings' Treasuries. 2. Of Queens' Gardens. 3. Of the Mystery of Life. 1 vol. 12mo, cloth.....\$1 50
- “ **AN INQUIRY INTO SOME OF THE CONDITIONS AT PRESENT AFFECTING "THE STUDY OF ARCHITECTURE" IN OUR SCHOOLS.** 1 vol. 12mo, paper.....\$0 15
- “ **THE ETHICS OF THE DUST.** Ten Lectures to Little Housewives, on the Elements of Crystallization. 1 vol. 12mo, cloth.....\$1 25
- “ **"UNTO THIS LAST."** Four Essays on the First Principles of Political Economy. 1 vol. 12mo, cloth..\$1 00

- RUSKIN.** **THE CROWN OF WILD OLIVE.** Three Lectures on Work, Traffic, and War. 1 vol. 12mo. cloth.....\$1 00
- “ **TIME AND TIDE BY WEARE AND TYNE.** Twenty-five Letters to a Workingman on the Laws of Work. 1 vol. 12mo, cloth.....\$1 00
- “ **THE QUEEN OF THE AIR.** Being a Study of the Greek Myths of Cloud and Storm. 1 vol. 12mo, cloth.....\$1 00
- “ **LECTURES ON ART.** 1 vol. 12mo, cloth..... 1 00
- “ **FORS CLAVIGERA.** Letters to the Workmen and Labourers of Great Britain. Part 1. 1 vol. 12mo, cloth, plates, \$1 00
- “ **FORS CLAVIGERA.** Letters to the Workmen and Labourers of Great Britain. Part 2. 1 vol. 12mo, cloth, plates, \$1 00
- “ **MUNERA PULVERIS.** Six Essays on the Elements of Political Economy. 1 vol. 12mo, cloth.....\$1 00
- “ **ARATRA PENTELICI.** Six Lectures on the Elements of Sculpture, given before the University of Oxford. By John Ruskin. 12mo, cloth, \$1 50, or with plates.\$3 00
- “ **THE EAGLE'S NEST.** Ten Lectures on the relation of Natural Science to Art. 1 vol. 12mo.....\$1 50
- BEAUTIFUL PRESENTATION VOLUMES.**

Printed on tinted paper, and elegantly bound in crape cloth extra, bevelled boards, gilt head.

- RUSKIN.** **THE TRUE AND THE BEAUTIFUL IN NATURE, ART, MORALS, AND RELIGION.** Selected from the Works of John Ruskin, A.M. With a notice of the author by Mrs. L. C. Tuthill. Portrait. 1 vol. 12mo, cloth, plain, \$2.00; cloth extra, gilt head.....\$2 50
- “ **ART CULTURE.** Consisting of the Laws of Art selected from the Works of John Ruskin, and compiled by Rev. W. H. Platt, for the use of Schools and Colleges as well as the general public. A beautiful volume, with many illustrations. 1 vol. 12mo, cloth (shortly).
- “ **PRECIOUS THOUGHTS: Moral and Religious.** Gathered from the Works of John Ruskin, A.M. By Mrs. L. C. Tuthill. 1 vol. 12mo, cloth, plain, \$1.50. Extra cloth, gilt head.....\$2 00
- “ **SELECTIONS FROM THE WRITINGS OF JOHN RUSKIN.** 1 vol. 12mo, cloth extra, gilt head.....\$2 50
- “ **SELECTIONS FROM THE WRITINGS OF JOHN RUSKIN.** 1 vol. 12mo, plain cloth.....\$2 00
- “ **SESAME AND LILIES.** 1 vol. 12mo.....\$1 75
- “ **ETHICS OF THE DUST.** 12mo..... 1 75
- “ **CROWN OF WILD OLIVE.** 12mo..... 1 50

RUSKIN'S BEAUTIES.

- “ **THE TRUE AND BEAUTIFUL** }
 PRECIOUS THOUGHTS. } 3 vols., in box, cloth extra,
 CHOICE SELECTIONS. } gilt head.....\$6 00
 } do., half calf...10 00

RUSKIN'S POPULAR VOLUMES.

- CROWN OF WILD OLIVE. SESAME AND LILIES. QUEEN OF THE AIR. ETHICS OF THE DUST.**
 4 vols. in box, cloth extra, gilt head.....\$6 00

RUSKIN'S WORKS.

Revised edition.

- RUSKIN.** Vol. 1.—**SESAME AND LILIES.** Three Lectures. By John Ruskin, LL.D. 1. Of King's Treasuries. 2. Of Queens' Gardens. 3. Of the Mystery of Life. 1 vol. 8vo, cloth, \$2.00. Large paper.....\$2 50

RUSKIN'S WORKS.

Revised edition.

- “ Vol. 2.—**MUNERA PULVERIS.** Six Essays on the Elements of Political Economy. By John Ruskin. 1 volume 8vo, cloth. \$2 00
Large paper. 2 50
- “ Vol. 3.—**ARATRA PENTELICI.** Six Lectures on the Elements of Sculpture, given before the University of Oxford. By John Ruskin. 1 vol. 8vo. \$4 00
Large paper. 4 50
- “ **THE POETRY OF ARCHITECTURE: Villa and Cottage.** With numerous plates. By Kata Phusin. 1 vol. 12mo, cloth. \$1 50
Kata Phusin is the supposed Nom de Plume of John Ruskin.
- “ **FORS CLAVIGERA.** Letters to the Workmen and Laborers of great Britain. Part 3. 1 vol. 12mo, cloth. \$1 50

RUSKIN—COMPLETE WORKS.

- THE COMPLETE WORKS OF JOHN RUSKIN.** 27 vols., extra cloth, in a box. \$40 00
Ditto 27 vols., extra cloth. *Plates*... 48 00
Ditto Bound in 17 vols., half calf. do. . . . 70 00

SHIP-BUILDING, &c.

- BOURNE. A TREATISE ON THE SCREW PROPELLER, SCREW VESSELS, AND SCREW ENGINES,** as adapted for Purposes of Peace and War. Illustrated by numerous woodcuts and engravings. By John Bourne. New edition. 1867. 1 vol. 4to, cloth, \$18.00; half russia. \$24 00
- WATTS. RANKINE (W. J. M.) AND OTHERS.** Ship-Building. Theoretical and Practical, consisting of the Hydraulics of Ship-Building, or Buoyancy, Stability, Speed and Design—The Geometry of Ship-Building, or Modelling, Drawing, and Laying Off—Strength of Materials as applied to Ship-Building—Practical Ship-Building—Masts, Sails, and Rigging—Marine Steam Engineering—Ship-Building for Purposes of War. By Isaac Watts, C.B., W. J. M. Rankine, C.B., Frederick K. Barnes, James Robert Napier, etc. Illustrated with numerous fine engravings and woodcuts. Complete, in 30 numbers, boards, \$35.00; 1 vol. folio, cloth, \$37.50; half russia, \$40 00
- WILSON (T. D.) SHIP-BUILDING, THEORETICAL AND PRACTICAL.** In Five Divisions.—Division I. Naval Architecture. II. Laying Down and Taking off Ships. III. Ship-Building. IV. Masts and Spar Making. V. Vocabulary of Terms used—intended as a Text-Book and for Practical Use in Public and Private Ship-Yards. By Theo. D. Wilson, Assistant Naval Constructor, U. S. Navy; Instructor of Naval Construction, U. S. Naval Academy; Member of the Institution of Naval Architects, England. With numerous plates, lithographic and wood. 1 vol. 8vo. \$7 50

SOAP.

- MORFIT. A PRACTICAL TREATISE ON THE MANUFACTURE OF SOAPS.** With numerous wood-cuts and elaborate working drawings. By Campbell Morfit, M.D., F.C.S. 1 vol. 8vo. \$20 00

STEAM ENGINE.

- TROWBRIDGE. TABLES, WITH EXPLANATIONS, OF THE NON-CONDENSING STATIONERY STEAM ENGINE,** and of High-Pressure Steam Boilers. By Prof. W. P. Trowbridge, of Yale College Scientific School. 1 vol. 4to, plates. \$2 50
- “ **TREATISE ON THE GENERATION AND UTILIZATION OF HEAT THROUGH THE MEDIUM OF STEAM AND STEAM BOILERS.** Designed as a Text-Book and for Practical use. By Prof. W. P. Trowbridge. Very fully illustrated. 1 vol. 8vo (shortly).

TURNING, &c.

THE LATHE, AND ITS USES, ETC. On Instructions in the Art of Turning Wood and Metal. Including a description of the most modern appliances for the ornamentation of plane and curved surfaces. With a description, also, of an entirely novel form of Lathe for Eccentric and Rose Engine Turning, a Lathe and Turning Machine combined, and other valuable matter relating to the Art. 1 vol. 8vo, copiously illustrated, cloth.....\$7 00

" SUPPLEMENT AND INDEX TO SAME. Paper...\$0 90
VENTILATION.

LEEDS (L. W.). A TREATISE ON VENTILATION. Comprising Seven Lectures delivered before the Franklin Institute, showing the great want of improved methods of Ventilation in our buildings, giving the chemical and physiological process of respiration, comparing the effects of the various methods of heating and lighting upon the ventilation, &c. Illustrated by many plans of all classes of public and private buildings, showing their present defects, and the best means of improving them. By Lewis W. Leeds. 1 vol. 8vo, with numerous wood-cuts and colored plates. Cloth.....\$2 50

"It ought to be in the hands of every family in the country."—*Technologist*.

"Nothing could be clearer than the author's exposition of the principles of the principles and practice of both good and bad ventilation."—*Van Nostrand's Engineering Magazine*.

"The work is every way worthy of the widest circulation."—*Scientific American*.

REID. VENTILATION IN AMERICAN DWELLINGS. With a series of diagrams presenting examples in different classes of habitations. By David Boswell Reid, M.D. To which is added an introductory outline of the progress of improvement in ventilation. By Elisha Harris, M.D. 1 vol. 12mo, \$1 50

WEIGHTS, MEASURES, AND COINS.

TABLES OF WEIGHTS, MEASURES, COINS, &c., OF THE UNITED STATES AND ENGLAND, with their Equivalents in the French Decimal System. Arranged by T. T. Egleston, Professor of Mineralogy, School of Mines, Columbia College. 1 vol. 18mo.....\$0 75

"It is a most useful work for all chemists and others who have occasion to make the conversions from one system to another."—*American Chemist*.

"Every mechanic should have these tables at hand."—*American Horological Journal*.

J. W. & SON are Agents for and keep in stock

SAMUEL BAGSTER & SONS' PUBLICATIONS,

LONDON TRACT SOCIETY PUBLICATIONS,

COLLINS' SONS & CO.'S BIBLES,

MURRAY'S TRAVELLER'S GUIDES,

WEALE'S SCIENTIFIC SERIES

Full Catalogues gratis on application.

J. W. & SON import to order, for the TRADE AND PUBLIC,

BOOKS, PERIODICALS, &c.,

FROM

ENGLAND, FRANCE, AND GERMANY.


* * JOHN WILEY & SON'S Complete Classified Catalogue of the most valuable and latest scientific publications supplied gratis to order.

15

1878
1879
1880



GETTY RESEARCH INSTITUTE



3 3125 01360 0446

